

FMC00516-150CM DATA SHEET

N Female to BNC Male Cable RG-58 Coax with Heat Shrink in 150 CM length

The type N female to BNC male 150 cm cable using RG-58 coax, part number FMC00516-150CM, from Fairview Microwave is in-stock and ships same day. This Fairview type N to BNC cable assembly has a female to male gender configuration with 50 ohm flexible RG58C/U coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00516-150CM type N female to BNC male cable assembly operates to 4 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур М	ax L	Inits
Frequency Range	DC		4	4	GHz
VSWR			1.4	1:1	
Velocity of Propagation		ć	66		%
Capacitance		30.8 [101.05]	pF/fl	[pF/m]

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.31	0.47	0.72	1.19	2.87	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1*SQRT(FGHz) dB per connector.

Mechanical Specifications

Cable Assembly

 Length*
 59.06 in [150.01 cm]

 Weight
 0.123 lbs [55.79 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Jacket Material
Jacket Diameter

RG58C/U 50 Ohms Stranded Copper, Tin PE

Tinned Copper Braid PVC, Black

0.195 in [4.95 mm]

Configuration:

- N Female
- BNC Male
- RG58C/U

Features:

- Max Frequency 4 GHz
- 66% Phase Velocity
- PVC Jacket

Applications:

- General Purpose
- · Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Connectors

Description	Connect	or 1	Connector 2		
Туре	N Fema	le	BNC Male		
Specification			MIL-STD-348A		
Impedance	50 Ohm	าร	50 Ohms		
Contact Material & Plating	Brass, Sil	ver	Brass, Gold		
Contact Plating Spec.	QQ-S-36	6 5	30 µin minimum		
Dielectric Type	ric Type PTFE		PTFE		
Outer Cond Material & Platin	ng Brass, Nic	ckel			
Body Material & Plating	Brass, Nic	ckel	Brass, Nickel		
Body Plating Spec.	QQ-N-29	90	100 µin minimum		
Coupling Nut Material & Pla	ting		Brass, Nickel		
Coupling Nut Plating Spec.			100 µin minimum		

Environmental Specifications

Temperature


Operating Range -40 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

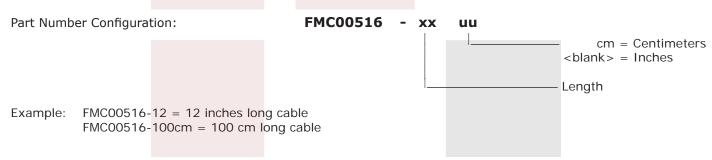

N Female to BNC Male Cable RG-58 Coax with Heat Shrink in 150 CM length from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: N Female to BNC Male Cable RG-58 Coax with Heat Shrink in 150 CM length FMC00516-150CM

URL: https://www.fairviewmicrowave.com/n-female-to-bnc-male-cable-rg-58-coax-in-150-cm-fmc00516-150cm-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





