

## Low Loss SMA Male to TNC Male Cable LMR-240-UF Coax in 36 Inch with Times Microwave Components



### FMC00990-36

#### Configuration

- Connector 1: SMA Male
- Connector 2: TNC Male
- Cable Type: LMR-240-UF
- Coax Flex Type: Flexible

#### Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

The SMA male to TNC male 36 inch cable using LMR-240-UF coax, part number FMC00990-36, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-UF coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00990-36 SMA male to TNC male cable assembly operates to 8 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ohms/1000ft [Ohms/Km]

Low Loss SMA Male to TNC Male Cable LMR-240-UF  
Coax in 36 Inch with Times Microwave Components



**FMC00990-36**

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Jacket Spark			5,000	Vrms

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	8	GHz
Insertion Loss (Typ.)	0.4	0.49	0.62	0.67	0.94	dB

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

**Mechanical Specifications**

**Cable Assembly**

Length	36 in [914.4 mm]
Width/Diameter	0.5 in [12.7 mm]
Weight	0.163 lbs [73.94 g]

**Cable**

Cable Type	LMR-240-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	TPE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.13 lbs-ft [0.18 N-m]
Flat Plate Crush	13 lbs/in [0.23 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

Low Loss SMA Male to TNC Male Cable LMR-240-UF  
Coax in 36 Inch with Times Microwave Components



**FMC00990-36**

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male	TNC Male
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles		500
Contact Material and Plating	Beryllium Copper, Gold	Phosphor Bronze, Gold
Contact Plating Specification	ASTM B488	50μ in. minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Passivated Stainless Steel, Gold	Brass, Tri-Metal
Body Material and Plating	Passivated Stainless Steel, Gold	Brass, Tri-Metal
Body Plating Specification	SAE-AMS-2700	80μ in. minimum
Coupling Nut Material and Plating	Passivated Stainless Steel	Brass, Tri-Metal
Coupling Nut Plating Specification	SAE-AMS-2700	80μ in. minimum
Torque		20 in-lbs 2.26 Nm

**Environmental Specifications**

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Low Loss SMA Male to TNC Male Cable LMR-240-UF  
Coax in 36 Inch with Times Microwave Components




**FMC00990-36**

**Typical Performance Data**

**How to Order**

Part Number Configuration:

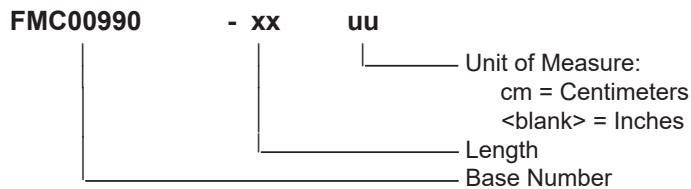

Example: FMC00990-12 = 12 inches long cable  
FMC00990-100cm = 100 cm long cable

Low Loss SMA Male to TNC Male Cable LMR-240-UF Coax in 36 Inch with Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Low Loss SMA Male to TNC Male Cable LMR-240-UF Coax in 36 Inch with Times Microwave Components FMC00990-36](https://www.fairviewmicrowave.com/low-loss-sma-male-to-tnc-male-cable-lmr-240-uf-coax-in-36-inch-with-times-microwave-components-fmc00990-36)

URL: <https://www.fairviewmicrowave.com/low-loss-sma-male-to-tnc-male-cable-lmr-240-uf-coax-in-36-inch-with-times-microwave-components-fmc00990-36-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMC00990-36 CAD Drawing

Low Loss SMA Male to TNC Male Cable LMR-240-UF Coax in 36 Inch with Times Microwave Components

