

Low Loss N Male to N Male Cable LMR-600 Coax in 48 Inch with Times Microwave Connectors with LF Solder

The type N male to type N male 48 inch cable using LMR-600 coax, part number FMC0101600LF-48, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-600 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC0101600LF-48 type N male to type N male cable assembly operates to 6 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	T	Тур Мах		ι	Units	
Frequency Range	DC			6		GHz	
Velocity of Propagation			87			%	
RF Shielding	90					dB	
Capacitance		23.4	[76.77]		pF/f	t [pF/m]	
Inductance		0.058	3 [0.19]		uH/f	t [uH/m]	
DC Resistance Inner Cor	nductor	0.53	[1.74]		Ω/100	0ft [Ω/Km]	
DC Resistance Outer Cor	nductor	1.2	[3.94]		Ω/100	0ft [Ω/Km]	

Mechanical Specifications

Cable Assembly

Length* Weight

Cable

Cable Type

Impedance
Inner Conductor Type
Inner Conductor Mate

Inner Conductor Material and Plating

Dielectric Type
Number of Shields
Shield Layer 1
Shield Layer 2
Jacket Material
Jacket Diameter

48 in [121.92 cm] 0.794 lbs [360.15 g]

LMR-600 50 Ohms Solid

Copper Clad Aluminum

PE (F) 2

Tinned Copper Aluminum Tape PE, Black

0.59 in [14.99 mm]

FMC0101600LF-48 DATA SHEET



Configuration:

- N Male
- N Male
- LMR-600

Features:

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity
- Double Shielded
- PE Jacket

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Connectors

Description	Connector 1	Connector 2		
Туре	N Male	N Male		
Configuration	Straight	Straight		
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold		
Dielectric Type	PTFE	PTFE		
Body Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal		
Coupling Nut Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal		

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C


Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:



Example: FMC0101600LF-12 = 12 inches long cable

FMC0101600LF-100cm = 100 cm long cable

Low Loss N Male to N Male Cable LMR-600 Coax in 48 Inch with Times Microwave Connectors with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss N Male to N Male Cable LMR-600 Coax in 48 Inch with Times Microwave Connectors with LF Solder FMC0101600LF-48


URL: https://www.fairviewmicrowave.com/standard-n-male-n-male-cable-lmr600-coax-fmc0101600lf-48-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





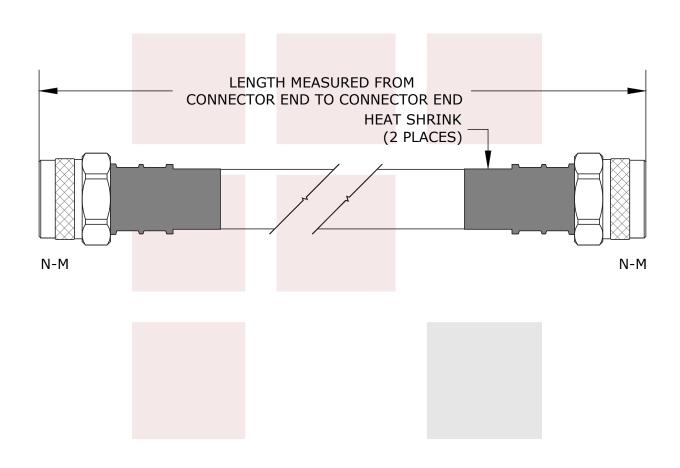

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
Low Loss N Male to N Male Cable LMR-600 Coax in 48	DWG NO	CAGE	CAGE CODE 3FKR5				
Inch with Times Microwave Connectors with LF Solder	CAD FILE 101014	SHEET	SCALE N/A	SIZE A	5568		