

## FMC0212174LF-12 DATA SHEET

# SMA Male to SMA Female Bulkhead Cable RG174 Coax in 12 Inch with LF Solder

The SMA male to SMA female bulkhead 12 inch cable using RG174 coax, part number FMC0212174LF-12, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to female gender configuration with 50 ohm flexible RG-174 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC0212174LF-12 SMA male to SMA female cable assembly operates to 1 GHz. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

## **Electrical Specifications**

Description	Min	Т	ур	Max	Ur	nits
Frequency Range	DC			1,000	М	1Hz
VSWR				1.35:1		
Velocity of Propagation		(	56		C	%
Capacitance	30.94 [101.51]		pF/ft	pF/ft [pF/m]		

## **Mechanical Specifications**

#### **Cable Assembly**

Length\*

Cable

Cable Type Impedance

Inner Conductor Type

Inner Conductor Material and Plating

Dielectric Type Number of Shields Shield Laver 1

Jacket Material

Jacket Material

12 in [304.8 mm]

RG-174 50 Ohms Solid

Copper Clad Steel

PE 1

Tinned Copper Braid

PVC, Black

0.102 in [2.59 mm]



## **Configuration:**

- SMA Male
- SMA Female Bulkhead
- RG-174

#### **Features:**

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

## **Applications:**

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Connectors**

Connector 1	Connector 2		
SMA Male	SMA Female		
	Bulkhead		
50 Ohms	50 Ohms		
Brass, Gold	Beryllium Copper, Gold		
50μ in. minimum	50μ in. minimum		
PTFE	PTFE		
Brass, Nickel	Brass, Gold		
100μ in. minimum	3μ in. minimum		
5/16 inch	5/16 inch		
4 in-lbs 0.45 Nm			
	SMA Male  50 Ohms  Brass, Gold  50µ in. minimum  PTFE  Brass, Nickel  100µ in. minimum  5/16 inch		

## **Environmental Specifications**

**Temperature** 


Operating Range -20 to +80 deg C

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

### **How to Order**

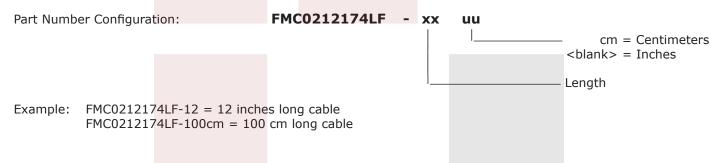

SMA Male to SMA Female Bulkhead Cable RG174 Coax in 12 Inch with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Male to SMA Female Bulkhead Cable RG174 Coax in 12 Inch with LF Solder FMC0212174LF-12

URL: https://www.fairviewmicrowave.com/standard-sma-male-sma-female-cable-rg174-coax-fmc0212174lf-12-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.







SMA Male to SMA Female Bulkhead Cable RG174 Coax in 12 Inch with LF Solder