

RA SMA Male to RA SMP Female Cable FM-F086 Coax in 36 Inch with LF Solder

The RA SMA male to RA SMP female 36 inch cable using FM-F086 coax, part number FMC0421085LF-36, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMP cable assembly has a male to female gender configuration with 50 ohm flexible FM-F086 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC0421085LF-36 SMA male to SMP female cable assembly operates to 12 GHz. The right angle SMA and right angle SMP interfaces on the FM-F086 cable allow for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур Мах	Units
Frequency Range	DC		12	GHz
VSWR			1.35:1	
Velocity of Propagation		70	0.6	%
Capacitance		28.95	[94.98]	pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Length* Weight

Cable

Cable Type Impedance

Inner Conductor Type

Inner Conductor Material and Plating

Dielectric Type Number of Shields Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter 36 in [914.4 mm] 0.088 lbs [39.92 g]

FM-F086 50 Ohms Solid Copper, Silver

PTFE 2

Silver Plated Copper Tape Silver Plated Copper Braid

FEP, Blue

0.104 in [2.64 mm]

FMC0421085LF-36 DATA SHEET



Configuration:

- SMA Male Right Angle
- SMP Female Right Angle
- FM-F086


Features:

- Max Frequency 12 GHz
- 70.6% Phase Velocity
- Double Shielded
- FEP Jacket

Applications:

- General Purpose
- Laboratory Use

Cable Diagram:



Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Connectors

Description	Connector 1	Connector 2		
Туре	SMA Male	SMP Female		
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Brass, Gold	Brass, Gold Beryllium Copper, Gold		
Contact Plating Spec.	50μ in. minimum	MIL-G-45204		
Dielectric Type	Teflon	PTFE		
Body Material & Plating	Stainless Steel, Gold	Beryllium Copper, Gold		
Body Plating Spec.	3μ in. minimum	MIL-G-45204		
Hex Size	5/16 inch			
Torque	8.5 in-lbs 0.96 Nm			
vironmental Specifi Temperature	cations			

En

-65 to +165 deg C Operating Range

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration: FMC0421085LF - xx cm = Centimeters

dank> = Inches Length FMC0421085LF-12 = 12 inches long cable Example: FMC0421085LF-100cm = 100 cm long cable

RA SMA Male to RA SMP Female Cable FM-F086 Coax in 36 Inch with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: RA SMA Male to RA SMP Female Cable FM-F086 Coax in 36 Inch with LF Solder FMC0421085LF-36

URL: https://www.fairviewmicrowave.com/standard-ra-sma-male-ra-smp-female-cable-fmf086-coax-fmc0421085lf-36-p. aspx

> The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689



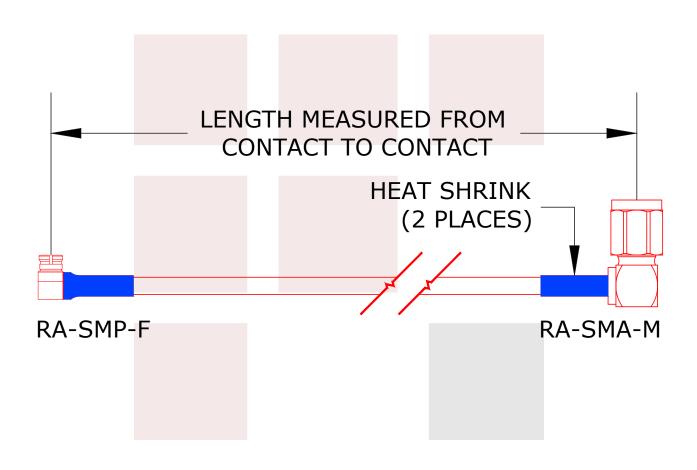

	FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
F	RA SMA Male to RA SMP Female Cable FM-F086 Coax in 36 Inch with LF Solder	FMC0421085LF				CAGE CODE 3FKR5		
i		CAD FILE	102114	SHEET	SCALE	N/A	SIZE A	5568