

Low Loss Space SMA Female Bulkhead to SMA Female Bulkhead Cable FM-R200LL Coax




**FMCA100013**

**Configuration**

- Connector 1: SMA Female Bulkhead
- Connector 2: SMA Female Bulkhead
- Cable Type: FM-R200LL
- Coax Flex Type: Flexible

**Features**

- Max Frequency 26 GHz
- Shielding Effectivity > 100 dB
- 82% Phase Velocity
- Double Shielded
- ETFE Jacket
- Up to 300 Mrad of Radiation Resistance
- Low Outgassing (TML <1%, CVCM <1%) per ASTM E-595
- Operating Temperature -65 to +150 Deg C
- Built in a Facility with < 100,000 Particles/sq ft
- Built to IPC-A-620 Class 3

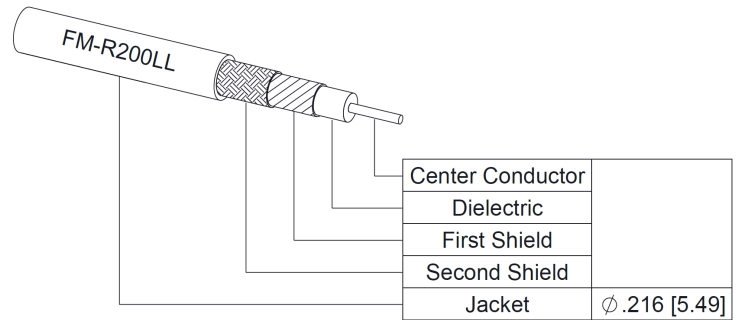

**Applications**

- General Purpose
- Laboratory Use
- Vacuum Environments
- Low Earth Orbit (LEO)
- Space (Exploration, Launches, Maintenance, Stations)
- Ground Systems
- Satellites

**Description**

The SMA female bulkhead to SMA female bulkhead cable using FM-R200LL coax, part number FMCA100013, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a female to female gender configuration with 50 ohm flexible FM-R200LL coax. Fairview Microwave’s flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA100013 SMA female to SMA female cable assembly operates to 26 GHz. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 100 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26	GHz
VSWR			1.4:1	
Velocity of Propagation		82		%
RF Shielding	100			dB

Low Loss Space SMA Female Bulkhead to SMA Female Bulkhead Cable FM-R200LL Coax



**FMCA100013**

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Capacitance		25 [82.02]		pF/ft [pF/m]

**Specifications by Frequency**

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency						
FMCA100013	Custom Lengths Available	Insertion Loss (Typ.)	0.068	0.098	0.15	0.22	0.409	dB/ft	
			0.23	0.33	0.5	0.73	1.35	dB/m	
FMCA100013-12	12 Inch	Insertion Loss (Typ.)	0.27	0.3	0.35	0.42	0.61	dB	0.11
FMCA100013-18	18 Inch	Insertion Loss (Typ.)	0.31	0.35	0.43	0.53	0.82	dB	0.134
FMCA100013-24	24 Inch	Insertion Loss (Typ.)	0.34	0.4	0.5	0.64	1.02	dB	0.158
FMCA100013-100CM	100 CM	Insertion Loss (Typ.)	0.43	0.53	0.7	0.93	1.55	dB	0.22
FMCA100013-200CM	200 CM	Insertion Loss (Typ.)	0.65	0.85	1.19	1.65	2.89	dB	0.377

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.11 pounds
Additional Weight per Inch:	0.004 pounds

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter	0.437 in [11.1 mm]
Weight	0.11 lbs [49.9 g]

**Cable**

Cable Type	FM-R200LL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver plated copper
Shield Layer 2	Silver plated copper
Jacket Material	ETFE, Black
Jacket Diameter	0.216 in [5.49 mm]
One Time Minimum Bend Radius	1.08 in [27.43 mm]

Low Loss Space SMA Female Bulkhead to SMA  
Female Bulkhead Cable FM-R200LL Coax



**FMCA100013**

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Female Bulkhead	SMA Female Bulkhead
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Stainless Steel, Passivated	Stainless Steel, Passivated

**Environmental Specifications**

Operating Range Temperature -65 to +150 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:  
Values at 25°C, sea level.

Low Loss Space SMA Female Bulkhead to SMA Female Bulkhead Cable FM-R200LL Coax



**FMCA100013**

**Typical Performance Data**


**How to Order**

Part Number Configuration:

**FMCA100013**

**- xx**

**uu**

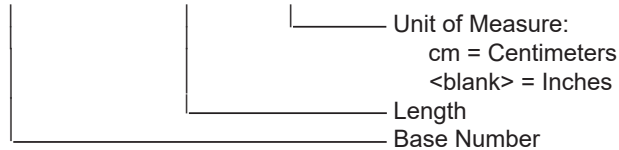

Example: FMCA100013-12 = 12 inches long cable  
FMCA100013-100cm = 100 cm long cable

Low Loss Space SMA Female Bulkhead to SMA Female Bulkhead Cable FM-R200LL Coax from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Low Loss Space SMA Female Bulkhead to SMA Female Bulkhead Cable FM-R200LL Coax FMCA100013](#)

URL: <https://www.fairviewmicrowave.com/low-loss-space-sma-female-bulkhead-to-sma-female-bulkhead-cable-fm-r200ll-coax-fmca100013-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMCA100013 CAD Drawing

Low Loss Space SMA Female Bulkhead to SMA Female Bulkhead Cable FM-R200LL Coax

