

Low Loss 75 Ohm N Male to 75 Ohm N Male Cable 75 Ohm LMR-600-75-DB Coax with Times Microwave Components




FMCA100033

Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: LMR-600-75-DB
- Coax Cable Group: 96

Features

- Max Frequency 2 GHz
- 87% Phase Velocity
- PE Jacket

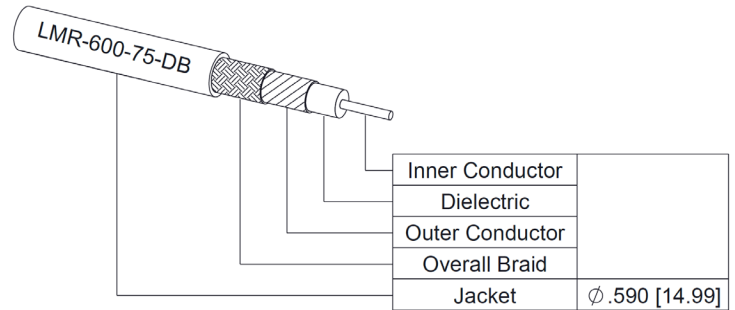

Applications

- General Purpose
- Laboratory Use

Description

The 75 ohm type N male to 75 ohm type N male cable using 75 ohm LMR-600-75-DB coax, part number FMCA100033, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to male gender configuration with 75 ohm LMR-600-75-DB coax. The FMCA100033 type N male to type N male cable assembly operates to 2 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.4:1	
Velocity of Propagation		87		%

Specifications by Frequency

Low Loss 75 Ohm N Male to 75 Ohm N Male Cable 75 Ohm LMR-600-75-DB Coax with Times Microwave Components



FMCA100033

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	50	100	250	500	2000	MHz	
FMCA100033	Custom Lengths Available	Insertion Loss (Typ.)	0.005	0.007	0.011	0.016	0.037	dB/ft	
			0.02	0.03	0.04	0.06	0.13	dB/m	
FMCA100033-12	12 Inch	Insertion Loss (Typ.)	0.21	0.21	0.22	0.22	0.24	dB	0.367
FMCA100033-24	24 Inch	Insertion Loss (Typ.)	0.21	0.22	0.23	0.24	0.28	dB	0.403
FMCA100033-36	36 Inch	Insertion Loss (Typ.)	0.22	0.23	0.24	0.25	0.32	dB	0.438
FMCA100033-48	48 Inch	Insertion Loss (Typ.)	0.22	0.23	0.25	0.27	0.35	dB	0.473
FMCA100033-60	60 Inch	Insertion Loss (Typ.)	0.23	0.24	0.26	0.28	0.39	dB	0.508

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.367 pounds
Additional Weight per Inch:	0.00292 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.367 lbs [166.47 g]

Cable

Cable Type	LMR-600-75-DB
Impedance	75 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PTFE
Outer Conductor 1 Material and Plating	Aluminum Tape
Outer Conductor Diameter	0.461 in [11.71 mm]
Jacket Material	PE
Jacket Diameter	0.59 in [14.99 mm]

Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male
Impedance	75 Ohms	75 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Nickel, Gold	Nickel, Gold

Low Loss 75 Ohm N Male to 75 Ohm N Male Cable 75 Ohm LMR-600-75-DB Coax with Times Microwave Components



FMCA100033

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

How to Order

Part Number Configuration: **FMCA100033 - xx uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: FMCA100033-12 = 12 inches long cable
FMCA100033-100cm = 100 cm long cable

Low Loss 75 Ohm N Male to 75 Ohm N Male Cable 75 Ohm LMR-600-75-DB Coax with Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [Low Loss 75 Ohm N Male to 75 Ohm N Male Cable 75 Ohm LMR-600-75-DB Coax with Times Microwave Components FMCA100033](#)

URL: <https://www.fairviewmicrowave.com/low-loss-75-ohm-n-male-to-75-ohm-n-male-cable-75-ohm-lmr-600-75-db-coax-with-times-microwave-components-fmca100033-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMCA100033 CAD Drawing

Low Loss 75 Ohm N Male to 75 Ohm N Male Cable 75 Ohm LMR-600-75-DB Coax with Times Microwave Components

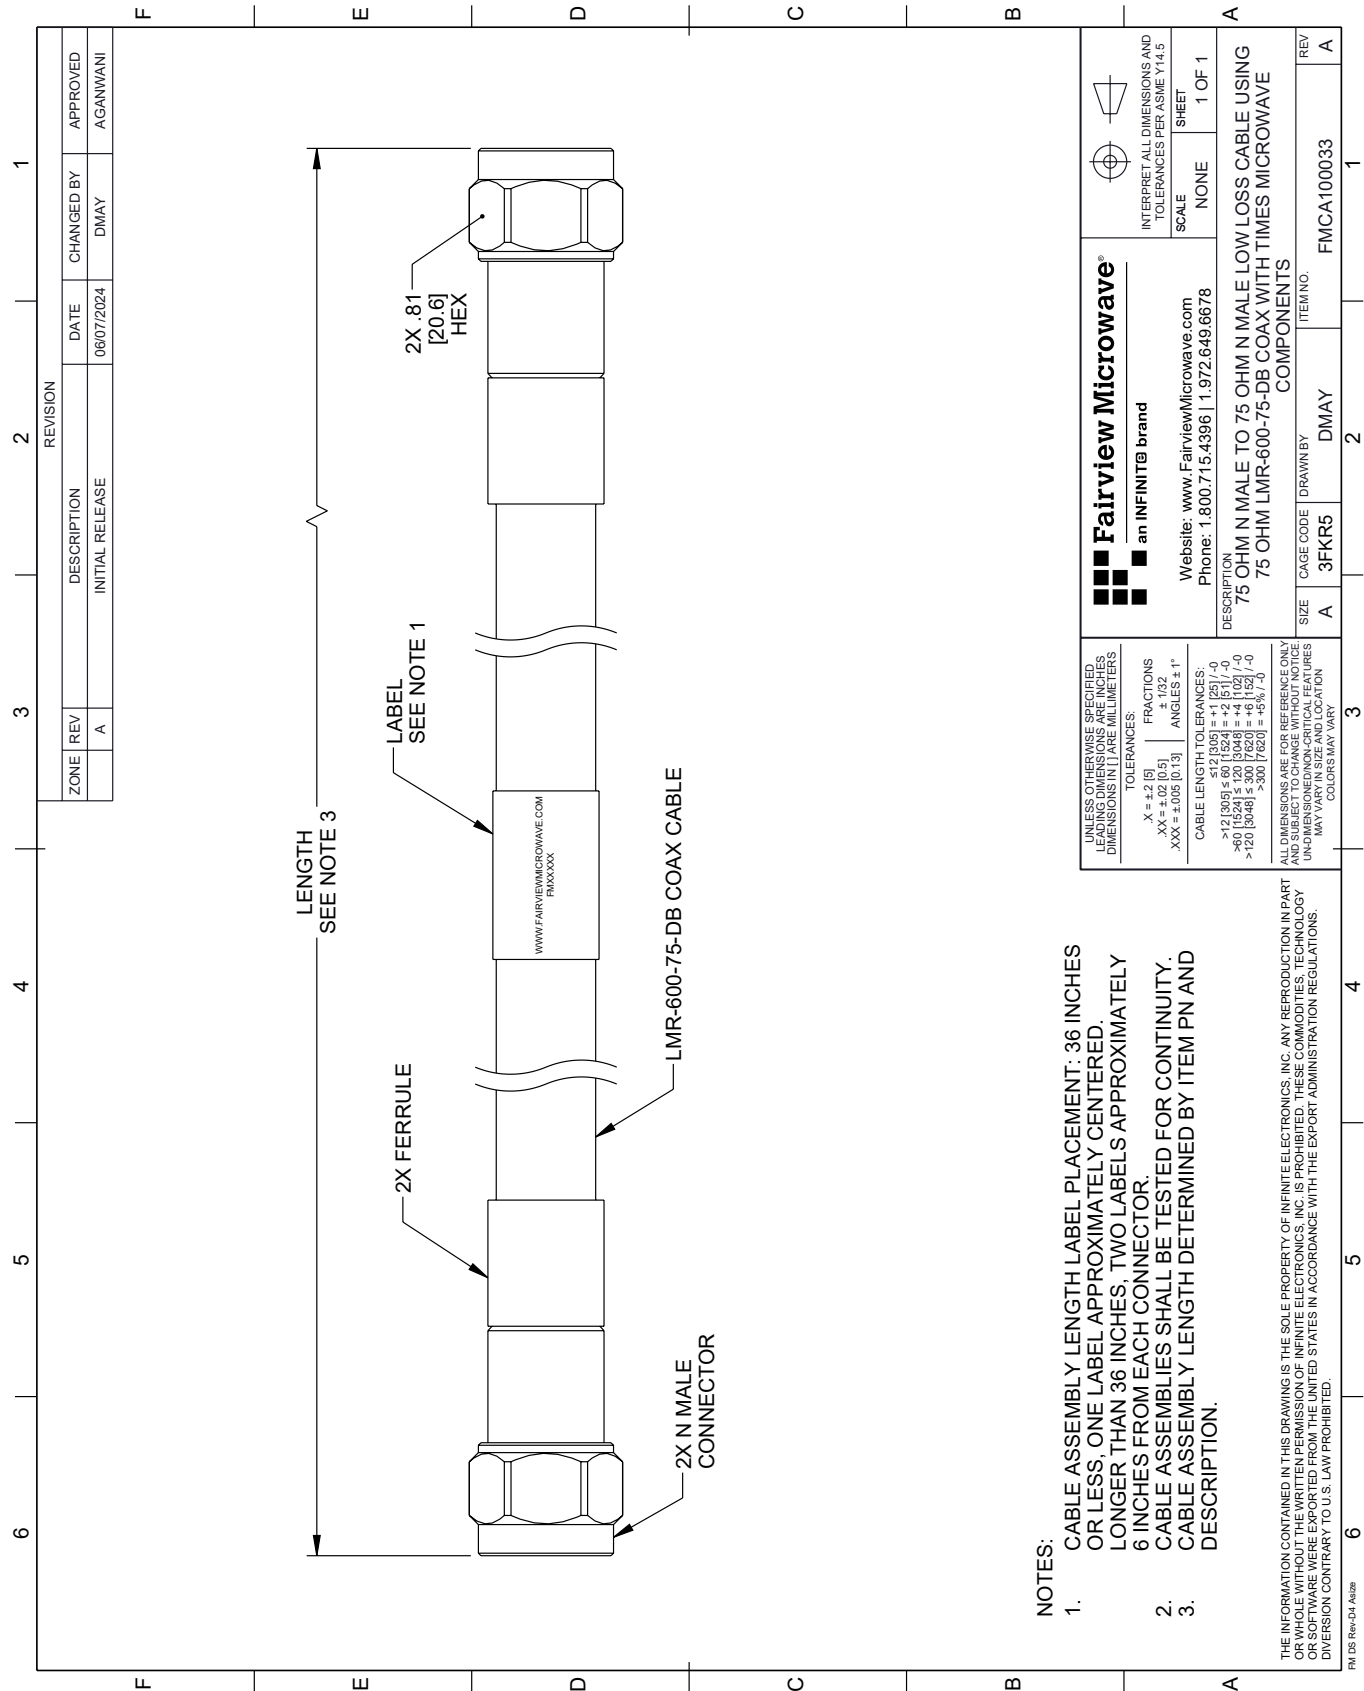

- NOTES:
- CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
 - CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.