

Low Loss SMA Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components




FMCA100134

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: TCOM-195
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- 80% Phase Velocity
- Triple Shielded
- PE Jacket

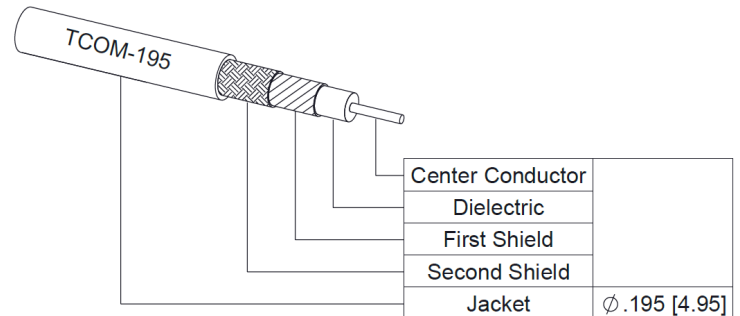

Applications

- General Purpose
- Laboratory Use

Description

The SMA male to SMA male cable using TCOM-195 coax, part number FMCA100134, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-195 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA100134 SMA male to SMA male cable assembly operates to 8 GHz. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		80		%
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.16 [23.49]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.42 [11.22]		Ohms/1000ft [Ohms/Km]
Jacket Spark			3,000	Vrms

Specifications by Frequency

Low Loss SMA Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components



FMCA100134

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	500	1000	2000	4000	8000	MHz	
FMCA100134	Custom Lengths Available	Insertion Loss (Typ.)	0.073	0.106	0.153	0.217	0.32	dB/ft	
			0.24	0.35	0.51	0.72	1.05	dB/m	
FMCA100134-12	12 inch	Insertion Loss (Typ.)	0.28	0.31	0.36	0.42	0.52	dB	0.073
FMCA100134-24	24 inch	Insertion Loss (Typ.)	0.35	0.42	0.51	0.64	0.84	dB	0.108
FMCA100134-36	36 inch	Insertion Loss (Typ.)	0.42	0.52	0.66	0.86	1.16	dB	0.143
FMCA100134-48	48 inch	Insertion Loss (Typ.)	0.5	0.63	0.82	1.07	1.48	dB	0.178
FMCA100134-60	60 inch	Insertion Loss (Typ.)	0.57	0.73	0.97	1.29	1.8	dB	0.213

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.073 pounds
Additional Weight per Inch:	0.00291 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.073 lbs [33.11 g]

Cable

Cable Type	TCOM-195
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	3
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]

Low Loss SMA Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components



FMCA100134

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	ASTM B488	ASTM B488
Dielectric Type	Teflon	Teflon
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 Inch	5/16 Inch

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Low Loss SMA Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components



FMCA100134

Typical Performance Data

How to Order

Part Number Configuration: **FMCA100134** **- xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: FMCA100134-12 = 12 inches long cable
FMCA100134-100cm = 100 cm long cable

Low Loss SMA Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Low Loss SMA Male to SMA Male Cable TCOM-195 Coax With Times Microwave Components FMCA100134](#)

URL: <https://www.fairviewmicrowave.com/low-loss-sma-male-to-sma-male-cable-tcom-195-coax-with-times-microwave-components-fmca100134-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

