

Fire Rated Low Loss SMA Male to RA SMA Male Cable TCOM-240-FR Coax With Times Microwave Components

FMCA100152




Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male Right Angle
- Cable Type: TCOM-240-FR
- Coax Flex Type: Flexible

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 100 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

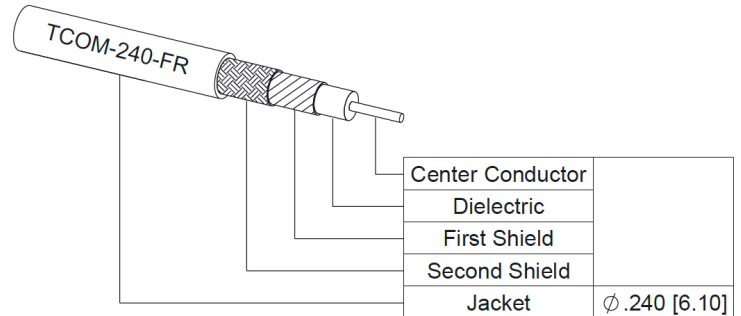

Applications

- General Purpose
- Laboratory Use

Description

The SMA male to RA SMA male cable using TCOM-240-FR coax, part number FMCA100152, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-240-FR coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA100152 SMA male to SMA male cable assembly operates to 6 GHz. The right angle SMA interface on the TCOM-240-FR cable allows for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 100 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	100			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		2.06 [6.76]		Ohms/1000ft [Ohms/Km]

Fire Rated Low Loss SMA Male to RA SMA Male Cable TCOM-240-FR Coax With Times Microwave Components

FMCA100152



Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			5,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
FMCA100152	Custom Lengths Available	Insertion Loss (Typ.)	0.037	0.052	0.076	0.123	0.197	dB/ft	
			0.13	0.18	0.25	0.41	0.65	dB/m	
FMCA100152-12	12 inch	Insertion Loss (Typ.)	0.39	0.41	0.43	0.48	0.55	dB	0.084
FMCA100152-24	24 inch	Insertion Loss (Typ.)	0.43	0.46	0.51	0.6	0.75	dB	0.129
FMCA100152-36	36 inch	Insertion Loss (Typ.)	0.47	0.51	0.58	0.72	0.95	dB	0.174
FMCA100152-48	48 inch	Insertion Loss (Typ.)	0.5	0.56	0.66	0.85	1.14	dB	0.219
FMCA100152-60	60 inch	Insertion Loss (Typ.)	0.54	0.61	0.73	0.97	1.34	dB	0.264

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.25 dB
Base Weight:	0.084 pounds
Additional Weight per Inch:	0.00375 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.084 lbs [38.1 g]

Cable

Cable Type	TCOM-240-FR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.25 lbs-ft [0.34 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

Fire Rated Low Loss SMA Male to RA SMA Male Cable TCOM-240-FR Coax With Times Microwave Components

FMCA100152



Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male Right Angle
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Mating Cycles		500
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	ASTM B488	50 µin
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Passivated Stainless Steel, Gold	
Body Material and Plating	Passivated Stainless Steel, Gold	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700	
Torque		7 in-lbs 0.79 Nm

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Fire Rated Low Loss SMA Male to RA SMA Male Cable TCOM-240-FR Coax With Times Microwave Components



FMCA100152

Typical Performance Data

How to Order

Part Number Configuration:

FMCA100152

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: FMCA100152-12 = 12 inches long cable
FMCA100152-100cm = 100 cm long cable

Fire Rated Low Loss SMA Male to RA SMA Male Cable TCOM-240-FR Coax With Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Fire Rated Low Loss SMA Male to RA SMA Male Cable TCOM-240-FR Coax With Times Microwave Components FMCA100152](#)

URL: <https://www.fairviewmicrowave.com/fire-rated-low-loss-sma-male-to-ra-sma-male-cable-tcom-240-fr-coax-with-times-microwave-components-fmca100152-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

