

## Fire Rated Low Loss RA N Male to N Female Bulkhead Cable TCOM-240-FR Coax With Times Microwave Components

**FMCA100157**




### Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Female Bulkhead
- Cable Type: TCOM-240-FR
- Coax Flex Type: Flexible

### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 100 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

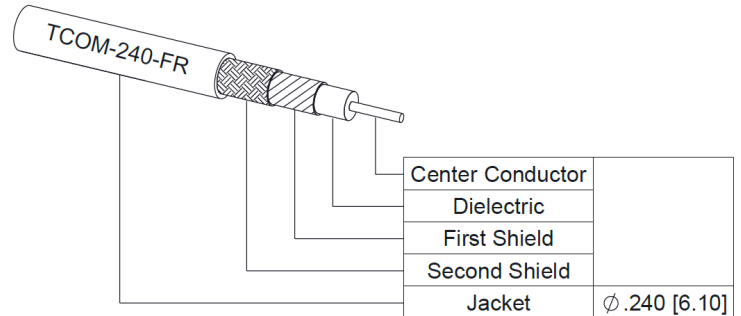

### Applications

- General Purpose
- Laboratory Use

### Description

The RA type N male to type N female bulkhead cable using TCOM-240-FR coax, part number FMCA100157, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to female gender configuration with 50 ohm flexible TCOM-240-FR coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA100157 type N male to type N female cable assembly operates to 6 GHz. The right angle type N interface on the TCOM-240-FR cable allows for easier connections in tight spaces. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 100 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	100			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		2.06 [6.76]		Ohms/1000ft [Ohms/Km]

## Fire Rated Low Loss RA N Male to N Female Bulkhead Cable TCOM-240-FR Coax With Times Microwave Components



**FMCA100157**

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			5,000	Vrms

### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
FMCA100157	Custom Lengths Available	Insertion Loss (Typ.)	0.037	0.052	0.076	0.123	0.197	dB/ft	
			0.13	0.18	0.25	0.41	0.65	dB/m	
FMCA100157-12	12 inch	Insertion Loss (Typ.)	0.56	0.58	0.6	0.65	0.72	dB	0.237
FMCA100157-24	24 inch	Insertion Loss (Typ.)	0.6	0.63	0.68	0.77	0.92	dB	0.282
FMCA100157-36	36 inch	Insertion Loss (Typ.)	0.64	0.68	0.75	0.89	1.12	dB	0.327
FMCA100157-48	48 inch	Insertion Loss (Typ.)	0.67	0.73	0.83	1.02	1.31	dB	0.372
FMCA100157-60	60 inch	Insertion Loss (Typ.)	0.71	0.78	0.9	1.14	1.51	dB	0.417

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.24 dB
Loss due to Connector 2:	0.28 dB
Base Weight:	0.237 pounds
Additional Weight per Inch:	0.00375 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.237 lbs [107.5 g]

#### Cable

Cable Type	TCOM-240-FR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.25 lbs-ft [0.34 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

## Fire Rated Low Loss RA N Male to N Female Bulkhead Cable TCOM-240-FR Coax With Times Microwave Components



**FMCA100157**

### Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	N Female Bulkhead
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Mating Cycles	500	
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 µin minimum	50 µinches
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Tri-Metal
Outer Conductor Plating Specification		80 µinches
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80 µin minimum	
Coupling Nut Material and Plating	Brass, Tri-Metal	
Coupling Nut Plating Specification	80 µin minimum	
Torque	9 in-lbs 1.02 Nm	

### Environmental Specifications

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

## Fire Rated Low Loss RA N Male to N Female Bulkhead Cable TCOM-240-FR Coax With Times Microwave Components



### FMCA100157

#### Typical Performance Data

#### How to Order

Part Number Configuration: **FMCA100157 - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: FMCA100157-12 = 12 inches long cable  
FMCA100157-100cm = 100 cm long cable

Fire Rated Low Loss RA N Male to N Female Bulkhead Cable TCOM-240-FR Coax With Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Fire Rated Low Loss RA N Male to N Female Bulkhead Cable TCOM-240-FR Coax With Times Microwave Components FMCA100157](https://www.fairviewmicrowave.com/fire-rated-low-loss-ra-n-male-to-n-female-bulkhead-cable-tcom-240-fr-coax-with-times-microwave-components-fmca100157-p.aspx)

URL: <https://www.fairviewmicrowave.com/fire-rated-low-loss-ra-n-male-to-n-female-bulkhead-cable-tcom-240-fr-coax-with-times-microwave-components-fmca100157-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

