

## Fire Rated Low Loss N Male to N Male Cable TCOM-600-FR Coax With Times Microwave Components

**FMCA100179**




### Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: TCOM-600-FR
- Coax Flex Type: Flexible

### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 100 dB
- 87% Phase Velocity
- Double Shielded
- PE Jacket

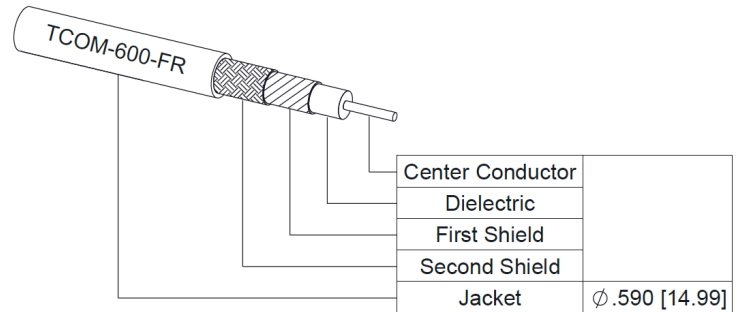

### Applications

- General Purpose
- Laboratory Use

### Description

The type N male to type N male cable using TCOM-600-FR coax, part number FMCA100179, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-600-FR coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA100179 type N male to type N male cable assembly operates to 6 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 100 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		87		%
RF Shielding	100			dB
Group Delay		1.17 [3.84]		ns/ft [ns/m]
Capacitance		23.4 [76.77]		pF/ft [pF/m]
Inductance		0.058 [0.19]		uH/ft [uH/m]
DC Resistance Inner Conductor		0.53 [1.74]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		1.52 [4.99]		Ohms/1000ft [Ohms/Km]

## Fire Rated Low Loss N Male to N Male Cable TCOM-600-FR Coax With Times Microwave Components

### FMCA100179



#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			8,000	Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
FMCA100179	Custom Lengths Available	Insertion Loss (Typ.)	0.013	0.019	0.028	0.046	0.077	dB/ft	
			0.05	0.07	0.1	0.16	0.26	dB/m	
FMCA100179-24	24 inch	Insertion Loss (Typ.)	0.23	0.24	0.26	0.3	0.36	dB	0.578
FMCA100179-36	36 inch	Insertion Loss (Typ.)	0.24	0.26	0.29	0.34	0.44	dB	0.732
FMCA100179-48	48 inch	Insertion Loss (Typ.)	0.26	0.28	0.32	0.39	0.51	dB	0.886
FMCA100179-120	120 inch	Insertion Loss (Typ.)	0.33	0.39	0.48	0.66	0.97	dB	1.81
FMCA100179-180	180 inch	Insertion Loss (Typ.)	0.4	0.49	0.62	0.89	1.36	dB	2.58

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.424 pounds
Additional Weight per Inch:	0.01283 pounds

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.424 lbs [192.32 g]

##### Cable

Cable Type	TCOM-600-FR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.59 in [14.99 mm]
One Time Minimum Bend Radius	1.5 in [38.1 mm]
Repeated Minimum Bend Radius	6 in [152.4 mm]
Bending Moment	2.75 lbs-ft [3.73 N-m]
Flat Plate Crush	60 lbs/in [1.07 Kg/mm]
Tensile Strength	350 lbs [158.76 Kg]

## Fire Rated Low Loss N Male to N Male Cable TCOM-600-FR Coax With Times Microwave Components

**FMCA100179**



### Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50μ in. minimum	50μ in. minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	100μ in. minimum	100μ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100μ in. minimum	100μ in. minimum
Hex Size	20.57 mm	20.57 mm
Torque	44 in-lbs 4.97 Nm	44 in-lbs 4.97 Nm

### Environmental Specifications

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

## Fire Rated Low Loss N Male to N Male Cable TCOM-600-FR Coax With Times Microwave Components



### FMCA100179

#### Typical Performance Data

#### How to Order

Part Number Configuration: **FMCA100179**    **- xx**    **uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: FMCA100179-12 = 12 inches long cable  
FMCA100179-100cm = 100 cm long cable

Fire Rated Low Loss N Male to N Male Cable TCOM-600-FR Coax With Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Fire Rated Low Loss N Male to N Male Cable TCOM-600-FR Coax With Times Microwave Components FMCA100179](#)

URL: <https://www.fairviewmicrowave.com/fire-rated-low-loss-n-male-to-n-male-cable-tcom-600-fr-coax-with-times-microwave-components-fmca100179-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

