

Non-Magnetic SMA Male to SMA Male Cable FM-141FL-NM Coax

FMCA100381



Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: FM-141FL-NM
- Coax Flex Type: Formable

Features

- Max Frequency 18 GHz
- Shielding Effectivity > 90 dB
- 70% Phase Velocity
- Copper Jacket
- 500 Mating Cycles

Applications

- General Purpose
- Laboratory Use

Description

The SMA male to SMA male cable using FM-141FL-NM coax, part number FMCA100381, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to male gender configuration with 50 ohm formable FM-141FL-NM coax. Fairview Microwave's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. The FMCA100381 SMA male to SMA male cable assembly operates to 18 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
RF Shielding	90			dB

Specifications by Frequency

Non-Magnetic SMA Male to SMA Male Cable FM-141FL-NM Coax

FMCA100381



Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	1000	2000	4500	9000	18000	MHz	
FMCA100381	Custom Lengths Available	Insertion Loss (Typ.)	0.162	0.219	0.363	0.553	0.852	dB/ft	
			0.54	0.72	1.2	1.82	2.8	dB/m	
FMCA100381-6	6 inch	Insertion Loss (Typ.)	0.42	0.45	0.52	0.62	0.77	dB	0.664
FMCA100381-12	12 inch	Insertion Loss (Typ.)	0.5	0.56	0.71	0.9	1.19	dB	1.324
FMCA100381-24	24 inch	Insertion Loss (Typ.)	0.67	0.78	1.07	1.45	2.05	dB	2.644
FMCA100381-36	36 inch	Insertion Loss (Typ.)	0.83	1	1.43	2	2.9	dB	3.964
FMCA100381-60	60 inch	Insertion Loss (Typ.)	1.15	1.44	2.16	3.11	4.6	dB	6.604

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.169 dB
Loss due to Connector 2:	0.169 dB
Base Weight:	1.324 pounds
Additional Weight per Inch:	0.11 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	1.324 lbs [600.56 g]

Cable

Cable Type	FM-141FL-NM
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Silver Plated Copper
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Copper-Tin Composite
Jacket Material	Copper
Repeated Minimum Bend Radius	0.375 in [9.53 mm]

Non-Magnetic SMA Male to SMA Male
Cable FM-141FL-NM Coax

FMCA100381



Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	500
Contact Material and Plating	Gold	Gold
Contact Plating Specification	MIL-G-45204	MIL-G-45204
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	ASTM-B-16	ASTM-B-16
Coupling Nut Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Plating Specification	ASTM-B-16	ASTM-B-16

Environmental Specifications

Operating Range Temperature-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Non-Magnetic SMA Male to SMA Male Cable FM-141FL-NM Coax

FMCA100381



Typical Performance Data

How to Order

Part Number Configuration: **FMCA100381** **- xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: FMCA100381-12 = 12 inches long cable
FMCA100381-100cm = 100 cm long cable


Non-Magnetic SMA Male to SMA Male Cable FM-141FL-NM Coax from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Non-Magnetic SMA Male to SMA Male Cable FM-141FL-NM Coax FMCA100381](https://www.fairviewmicrowave.com/non-magnetic-sma-male-to-sma-male-cable-fm-141fl-nm-coax-fmca100381-p.aspx)

URL: <https://www.fairviewmicrowave.com/non-magnetic-sma-male-to-sma-male-cable-fm-141fl-nm-coax-fmca100381-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMCA100381 CAD Drawing
Non-Magnetic SMA Male to SMA Male Cable FM-141FL-NM Coax

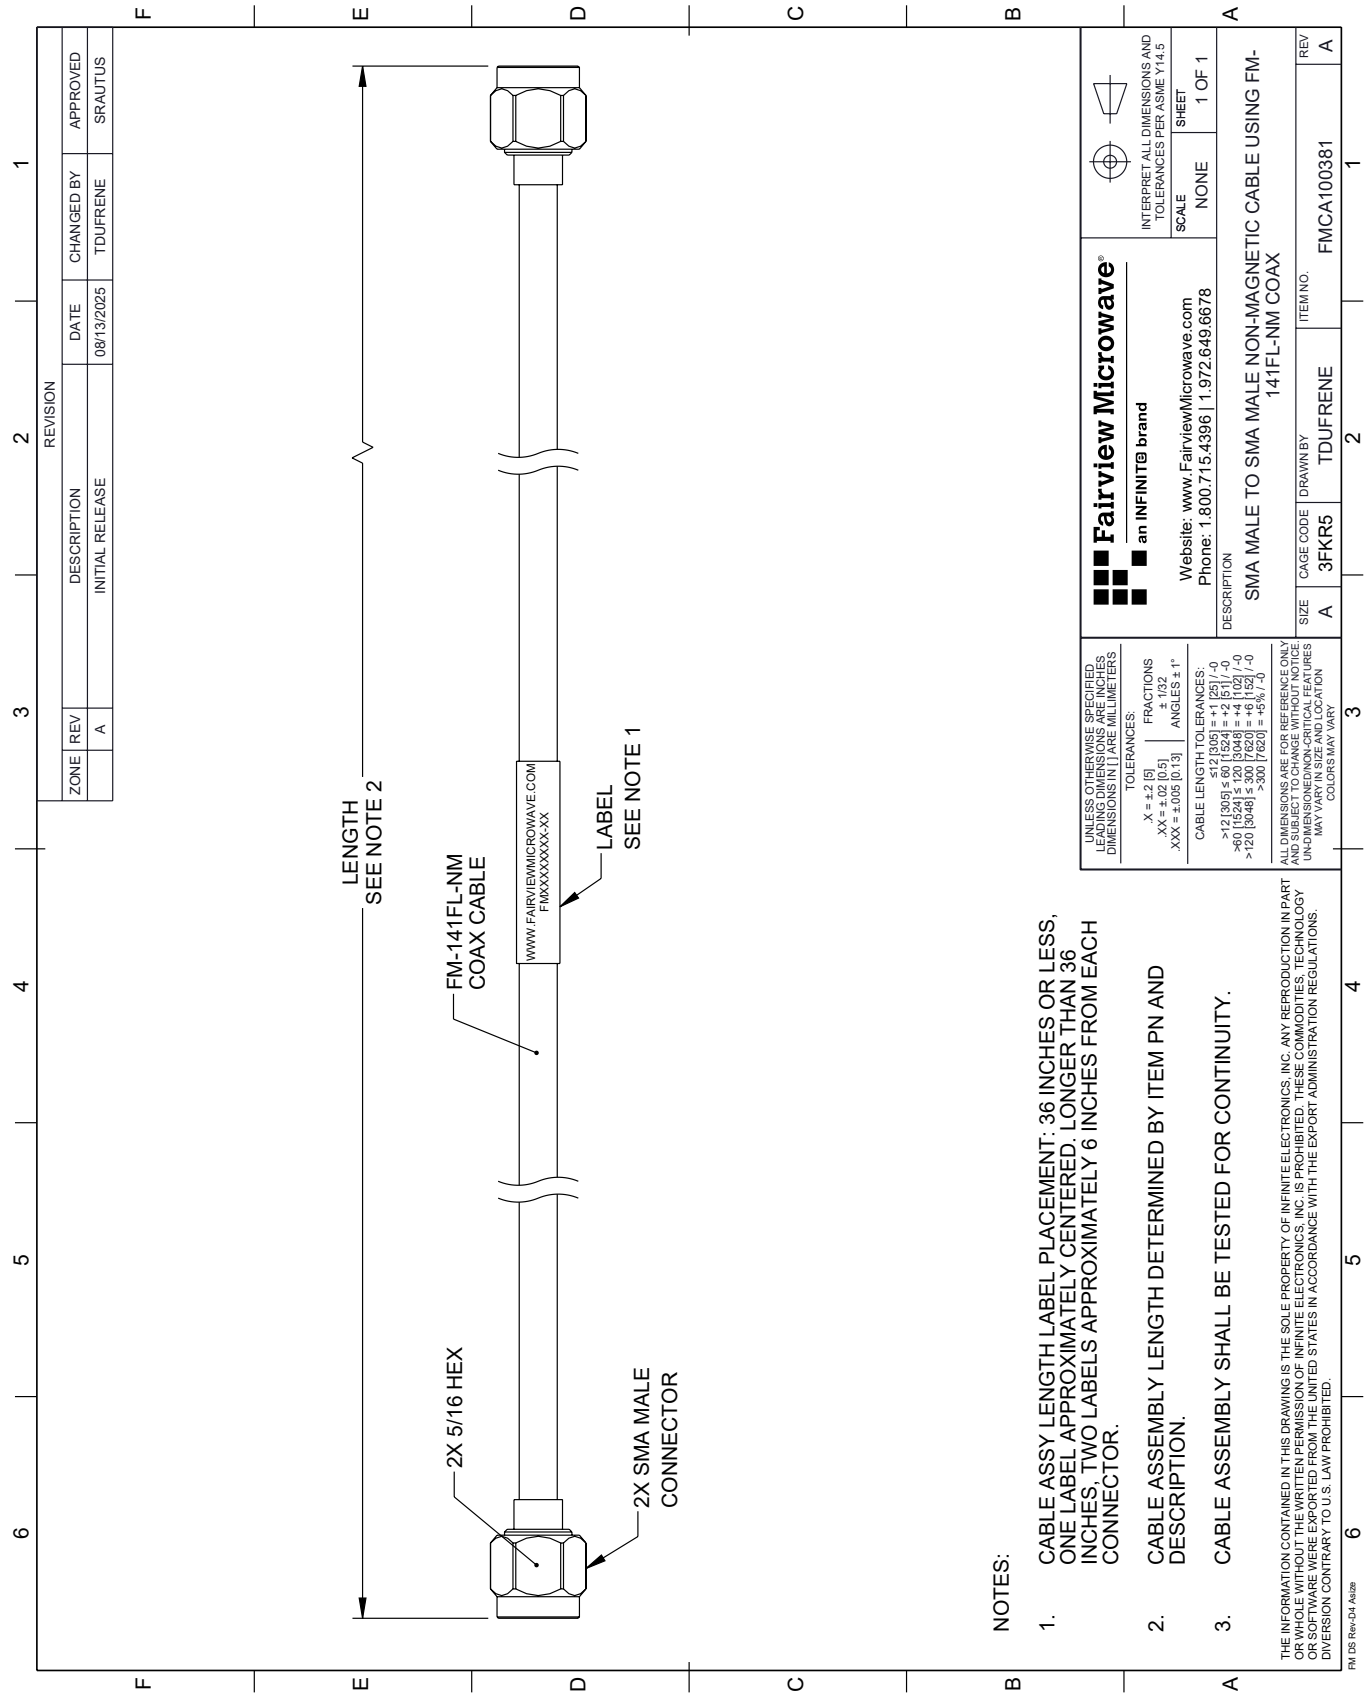

NOTES:

- 1. CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
- 2. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
- 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.

FM D8 Rev-D4 A424

REVISION			
ZONE	REV	DESCRIPTION	DATE
	A	INITIAL RELEASE	08/13/2025
		CHANGED BY	APPROVED
		TDUFRENE	SRAUTUS

Fairview Microwave® an INFINITI® brand		Website: www.FairviewMicrowave.com Phone: 1.800.715.4396 1.972.649.6678	
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES: X = ±.2 [5] .XX = ±.02 [0.5] .XXX = ±.005 [0.13]		FRACTIONS ± 1/32 ANGLES ± 1°	
CABLE LENGTH TOLERANCES: >12 [305] ≤ 60 [1524] = ±.125 [-.0] >60 [1524] ≤ 120 [3048] = ±.125 [-.0] >120 [3048] ≤ 300 [7620] = ±.125 [-.0] >300 [7620] = ±.125 [-.0]		ALL DIMENSIONS ARE FOR REFERENCE ONLY. DIMENSIONS FOR NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.	
DESCRIPTION SMA MALE TO SMA MALE NON-MAGNETIC CABLE USING FM-141FL-NM COAX		SCALE NONE	
SIZE A		SHEET 1 OF 1	
CAGE CODE 3FKR5		DRAWN BY TDUFRENE	
ITEM NO. FMCA100381		REV A	