



SMA Male to SMA Female Bulkhead Cable FM086FLEX Coax with LF Solder

The SMA male to SMA female bulkhead cable using FM086FLEX coax, part number FMCA1042, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to female gender configuration with 50 ohm flexible FM086FLEX coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1042 SMA male to SMA female cable assembly operates to 27 GHz. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB. Our new series of flexible cables use high performance FM086FLEX coax and are terminated with a new low profile connector design. These high performance flexible cables are an ideal choice for many applications including inrack RF devices where tight bends and continual flexure might be required. Our FM086FLEX is a flexible coax alternative to semi-rigid coax and has a solid PTFE resulting in a 69.5% phase velocity. This series features a smooth wall formed by the braid-over-sprial-ribbon design and has similar performance to a solid wall RG405 semi-rigid RG405 cable.

These FM086FLEX cables are similar to our existing SCA1814 cables. The heavier duty SCA1814 test cables have similar electrical performance, but include a heavy duty strain relief mechanism and extra booting material as well as a thick wal SMA connector to increase the ruggedness of the SCA1814 cables for use in more demanding test environments.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		27	GHz
VSWR			1.4:1	
Return Loss			16.54	dB
Velocity of Propagation		69.5		%
RF Shielding	90			dB
Group Delay		1.44 [4.72] ns/		ns/ft [ns/m]
Capacitance		29.4 [96.46]	pF/ft [pF/m]	
Operating Voltage (AC)			250	Vrms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	3	6	12	18	27	GHz
Insertion Loss (Max.)	0.62	0.9	1.3	1.6	1.85	dB/ft
	2.03	2.95	4.27	5.25	6.07	dB/m



Configuration:

- SMA Male
- SMA Female Bulkhead
- FM086FLEX

Features:

- Max Frequency 27 GHz
- Shielding Effectivity > 90 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket
- 500 Mating Cycles
- Typical SMA VSWR less than1.30:1 to 27 GHz Shielding effectivity > 90dB One time minimum bend radius: 0.24 inch

Applications:

- General Purpose
- Laboratory Use
- High Performance RF equipment interconnect
- Flexible in cabinet or in the rack requirements
- Inside the box RF routing
- General purpose lighter duty lab use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





VSWR (Max.)	1.12:1	1.2:1	1.25:1	1.35:1	1.4:1	
Power Handling (Max	.) 81	50	40	33		W

Mechanical Specifications

Cable Assembly

Length* 0 in [0 mm]

Cable

Cable Type FM086FLEX Impedance 50 Ohms

Inner Conductor Type Solid

Inner Conductor Material and Plating Copper Clad Steel, Silver Dielectric Type PTFE

Dielectric Type PTFE
Number of Shields 2
Shield Layer 1 Silver Plated Copper Tape

Shield Layer 1 Shield Layer 2

Outer Conductor 1 Material and Plating

Outer Conductor 2 Material and Plating Jacket Material

Jacket Diameter

One Time Minimum Bend Radius

FEP 0.104 in [2.64 mm]

Silver Plated Copper Braid

Silver Plated Copper Tape

Silver Plated Copper Braid

0.24 in [6.1 mm]

Repeated Minimum Bend Radius 0.24 in [6.1 mm] 0.79 in [20.07 mm]

Connectors

Description	Connector 1	Connector 2
Туре	SMA Male	SMA Female
Mount Method		Bulkhead
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material & Plating	Brass, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material & Plating	Stainless Steel, Gold	Stainless Steel, Gold
Coupling Nut Material & Pla	ating Passivated Stainless Steel	
Hex Size	5/16 Inch	
Seal Gasket Material		Silicon

Environmental Specifications

Temperature

Operating Range -40 to +150 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2020 REV 1.1 Page 2 of 4





How to Order

FMCA1042	-	XX	uu	
				cm = Centimeters <blank> = Inches - Length</blank>
	FMCA1042	FMCA1042 -	FMCA1042 - xx	FMCA1042 - xx uu

FMCA1042-100cm = 100 cm long cable

Example: FMCA1042-12 = 12 inches long cable

SMA Male to SMA Female Bulkhead Cable FM086FLEX Coax with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Male to SMA Female Bulkhead Cable FM086FLEX Coax with LF Solder FMCA1042


URL: https://www.fairviewmicrowave.com/sma-male-sma-female-cable-fm086flex-coax-fmca1042-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





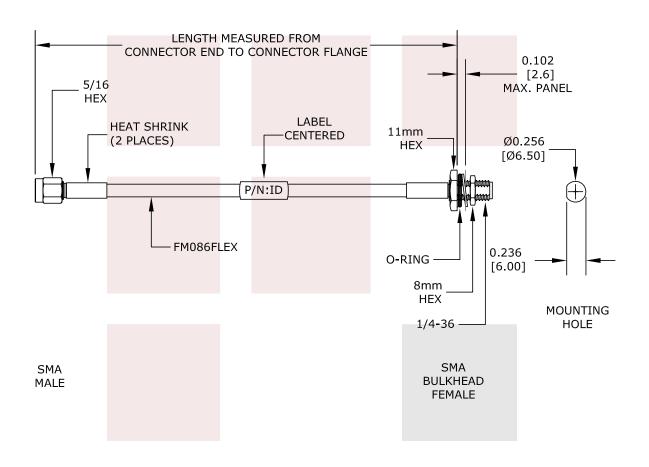

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
SMA Male to SMA Female Bulkhead Cable FM086FLEX	DWG NO FMCA1042			CAGE CODE 3FKR5		
Coax with LF Solder	CAD FILE 041015	SHEET	SCALE N/A	SIZE A	150	