



# RA TNC Male to RA TNC Male Cable FM141FLEX Coax with LF Solder

The RA TNC male to RA TNC male cable using FM141FLEX coax, part number FMCA1045, from Fairview Microwave is in-stock and ships same day. This Fairview TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible FM141FLEX coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1045 TNC male to TNC male cable assembly operates to 18 GHz. The right angle TNC interfaces on the FM141FLEX cable allow for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB. Our new series of flexible cables use high performance FM141FLEX coax and are terminated with a new low profile connector design. These high performance flexible cables are an ideal choice for many applications including in-rack RF devices where tight bends and continual flexure might be required. Our FM141FLEX is a flexible coax alternative to semirigid coax and has a solid PTFE resulting in a 69.5% phase velocity. This series features a smooth wall formed by the braid-over-spiral-ribbon design and has similar performance to a solid wall RG402 semi-rigid RG402 cable.

These FM141FLEX cables are similar to our existing SCA1814 cables. The heavier duty SCA1814 test cables have similar electrical performance, but include a heavy duty strain relief mechanism and extra booting material as well as a thick wall SMA connector to increase the ruggedness of the SCA1814 cables for use in more demanding test environments.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

# **Electrical Specifications**

Description	Min	Тур	Max	Units	-	
Frequency Range	DC		18	GHz		
VSWR		1.5:1				
Return Loss			13.98	dB		
Velocity of Propagation		69.5		%		
RF Shielding	90		dB			
Group Delay		1.44 [4.72]		ns/ft [ns/m]		
Capacitance		29.4 [96.46	]	pF/ft [pF/m	1]	
Operating Voltage (AC)			335	Vrms		

#### **Performance by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	3	6	12	18		GHz
Insertion Loss (Max.)	0.65	0.95	1.35	1.65		dB/ft
	2.13	3.12	4.43	5.41		dB/m



# **Configuration:**

- TNC Male Right Angle
- TNC Male Right Angle
- FM141FLEX

## **Features:**

- Max Frequency 18 GHz
- Shielding Effectivity > 90 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket
- 500 Mating Cycles
- Typical TNC VSWR 1.31:1 to 18 GHz

Shielding effectivity > 90dB One time minimum bend radius: 0.4 inch

# **Applications:**

- General Purpose
- Laboratory Use
- High Performance RF equipment interconnect
- Flexible in cabinet or in the rack requirements
- Inside the box RF routing
- General purpose lighter duty lab use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





VSWR (Max.)	1.3:1	1.35:1	1.45:1	1.5:1	
Power Handling (Max.)	215	150	105	88	W

## **Mechanical Specifications**

**Cable Assembly** 

Length\* 0 in [0 mm]

Cable

Cable Type Impedance 50 Ohms

Inner Conductor Type Solid

Inner Conductor Material and Plating Dielectric Type PTFE

Number of Shields Shield Layer 1

Shield Layer 2 Outer Conductor 1 Material and Plating

Outer Conductor 2 Material and Plating Jacket Material

Jacket Diameter

One Time Minimum Bend Radius Repeated Minimum Bend Radius

FM141FLEX

Copper Clad Steel, Silver

Silver Plated Copper Tape Silver Plated Copper Braid Silver Plated Copper Tape Silver Plated Copper Braid

0.163 in [4.14 mm]

0.4 in [10.16 mm] 1.58 in [40.13 mm]

## **Connectors**

Description	Connector 1	Connector 2
Туре	TNC Male	TNC Male
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material & Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material & Pla	ting Brass, Nickel	Brass, Nickel
Hex Size	9/16 Inch	9/16 Inch

#### **Environmental Specifications**

**Temperature** 

Operating Range -40 to +150 deg C

**Compliance Certifications** (see product page for current document)

**Plotted and Other Data** 

Notes:

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2020 REV 1.5 Page 2 of 4





#### **How to Order**

FMCA1045	- XX	uu	
		<u> </u>	cm = Centimeters <black> = Inches  Length</black>
	FMCA1U45	FMCA1U45 - XX	FMCA1045 - xx uu

Example: FMCA1045-12 = 12 inches long cable FMCA1045-100cm = 100 cm long cable

RA TNC Male to RA TNC Male Cable FM141FLEX Coax with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: RA TNC Male to RA TNC Male Cable FM141FLEX Coax with LF Solder FMCA1045


URL: https://www.fairviewmicrowave.com/ra-tnc-male-ra-tnc-male-cable-fm141flex-coax-fmca1045-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





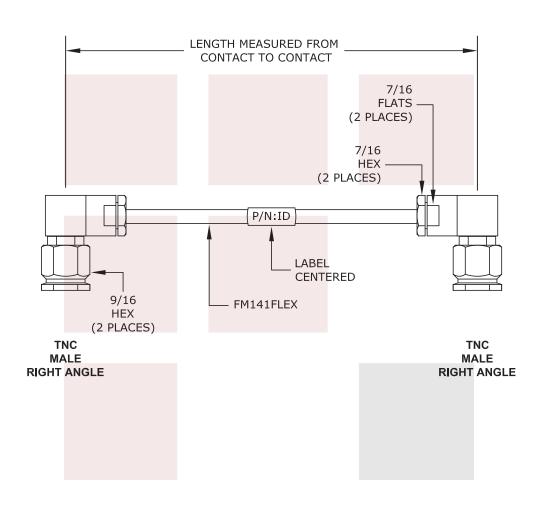

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
RA TNC Male to RA TNC Male Cable FM141FLEX Coax	DWG NO FMCA1045			CAGE CODE 3FKR5		
with LF Solder	CAD FILE 041515	SHEET	SCALE	≣ N/A	SIZE A	2233