

## MHF1 to SMA Female (Jack) Bulkhead (with O-ring) Cable Assembly Using O.D 1.13mm Cable



### FMCA11041

#### Configuration

- Connector 1: MHF1
- Connector 2: SMA Female Bulkhead

#### Features

- Max Frequency 6 GHz
- 70% Phase Velocity
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use
- External antenna connection (Wi-Fi, Bluetooth, LTE/5G, and GPS receivers)
- Improving signal strength (Embedded systems inside metal enclosures)
- Prototyping and development
- IoT and embedded systems (Drones and robotics)

#### Description

The MHF1 to SMA female bulkhead cable assembly using 1.13mm cable, part number FMCA11041, from Fairview Microwave is in-stock and ships same day. MHF1 (U.FL) is a very small RF connector found on compact electronics like Wi-Fi cards, LTE modules, and IoT boards. The FMCA11041 MHF1 to SMA female cable assembly operates to 6 GHz. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.5:1	
Velocity of Propagation		70		%
Test Voltage (DC)			300	V

#### Specifications by Frequency

MHF1 to SMA Female (Jack) Bulkhead (with O-ring)  
Cable Assembly Using O.D 1.13mm Cable



**FMCA11041**

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
			Frequency	1000	2500	5000	6000	
FMCA11041	Custom Lengths Available	Insertion Loss (Typ.)	0.67	1.055	1.49	1.65	dB/ft	
			2.2	3.47	4.89	5.42	dB/m	
FMCA11041-10CM	10 CM	Insertion Loss (Typ.)	0.42	0.55	0.69	0.75	dB	0.01
FMCA11041-20CM	20 CM	Insertion Loss (Typ.)	0.64	0.9	1.18	1.29	dB	0.02

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
 Loss due to Connector 2: 0.2 dB  
 Base Weight: 0.03 pounds

Electrical Specification Notes:  
 Values at 25°C, sea level.

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter 0.052 in [1.32 mm]  
 Weight 0.03 lbs [13.61 g]

**Cable**

Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type FEP  
 Number of Shields 1  
 Shield Layer 1 Tinned Copper  
 Outer Conductor 1 Material and Plating Tinned Copper  
 Jacket Material FEP  
 Jacket Diameter 0.052 in [1.32 mm]  
 One Time Minimum Bend Radius 0.157 in [3.99 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	MHF1	SMA Female Bulkhead
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating		Beryllium Copper, Gold
Body Material and Plating		Brass, Gold

**Environmental Specifications**

Operating Range Temperature -40 to +125 deg C

MHF1 to SMA Female (Jack) Bulkhead (with O-ring)  
Cable Assembly Using O.D 1.13mm Cable



**FMCA11041**

**Compliance Certifications** (see [product page](#) for current document)


**Plotted and Other Data**

Notes:  
Values at 25°C, sea level.

**Typical Performance Data**

**How to Order**

Part Number Configuration:

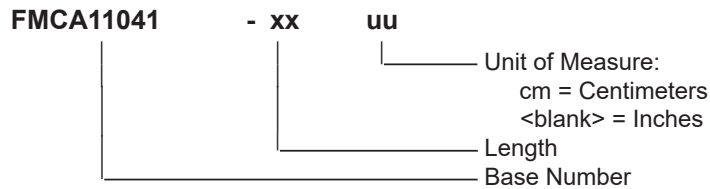

Example: FMCA11041-12 = 12 inches long cable  
FMCA11041-100cm = 100 cm long cable

MHF1 to SMA Female (Jack) Bulkhead (with O-ring) Cable Assembly Using O.D 1.13mm Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [MHF1 to SMA Female \(Jack\) Bulkhead \(with O-ring\) Cable Assembly Using O.D 1.13mm Cable FMCA11041](#)

URL: <https://www.fairviewmicrowave.com/mhf1-to-sma-female-bulkhead-cable-1.13mm-coax-fmca11041>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMCA11041 CAD Drawing

MHF1 to SMA Female (Jack) Bulkhead (with O-ring) Cable Assembly Using O.D 1.13mm Cable

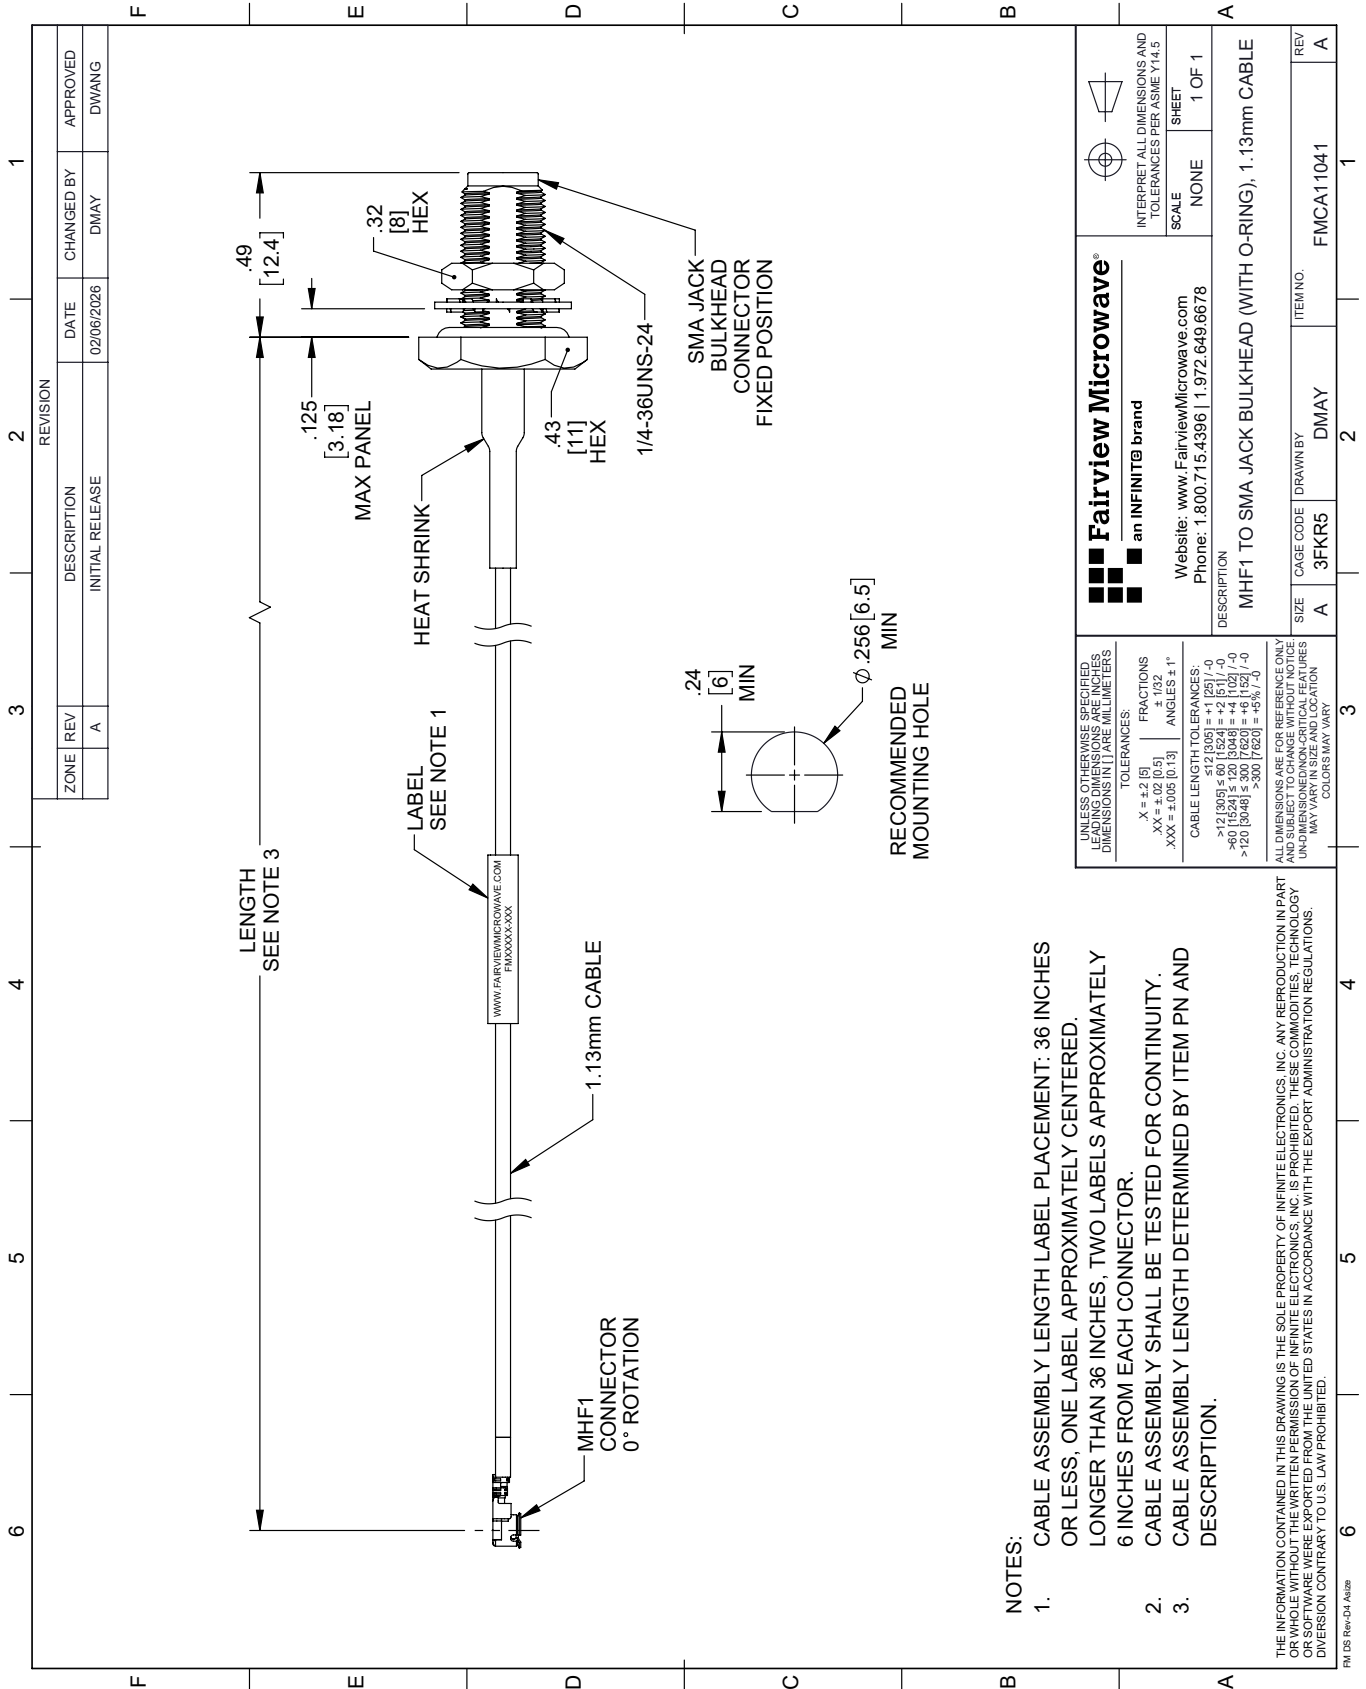

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.