

FMCA1450-4 DATA SHEET

Snap-On RA MMBX Plug to RA Snap-On MMBX Plug Cable RG316-DS Coax in 4 Inch

Fairview Microwave's MMBX cable assemblies are part of our full line of RF interconnects available for same-day shipping. These MMBX cable assemblies are designed for test applications or connection of your MMBX system components. With a high frequency range up to 3 GHz, this family of MMBX cables can also be used to connect your panels to PCB's with between series options like MMBX-to-SMA, MMBX-to-N or MMBX-to-TNC assemblies. There are hundreds of possible cable assembly configurations to choose from, all available same day.

This MMBX cable assembly datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave not only has many MMBX cable assembly options, but also a wide selection of RF, microwave and millimeter wave cable assemblies which allows RF designers to customize their configurations to whatever is required. Whether the need is to provide an I/O for a board design or simply create a custom cable assembly configuration, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom RF cable assemblies for you and ship same day.

Electrical Specifications

Description	Min	Тур Мах		Units
Frequency Range	DC		GHz	
VSWR				
Return Loss		-15	5.56	dB
Insertion Loss			0.36	dB
Velocity of Propagation		7	70	%
Capacitance		29.4 [pF/ft [pF/m]	

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.23	0.25	0.27	0.29	0.36	dB

Mechanical Specifications

Cable Assembly

Length* Diameter 4 in [101.6 mm] 0.24 in [6.1 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Shield Layer 2
Jacket Material

RG316-DS 50 Ohms Stranded Copper Clad Steel, Silver PTFE 2 Silver Plated Copper Braid Silver Plated Copper Braid FEP. Tan



Configuration:

- Snap-On MMBX Plug Right Angle
- Snap-On MMBX Plug Right Angle
- RG316-DS

Features:

- Max. Operating Frequency of 3 GHz
- Snap-On mating
- Low Profile Right Angle Configurations
- SMA Bulkhead, N Bulkhead and TNC Bulkhead Between-Series Configurations

Applications:

- General Purpose MMBX Test
- PCB Testing
- Low Profile MMBX Cable Jumpers
- PCB-to-Panel Connection

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Jacket Diameter 0.114 in [2.9 mm]

Repeated Minimum Bend Radius 0.6 in [15.24 mm]

Connectors

Description	Connector 1	Connector 2
Туре	MMBX Plug	MMBX Plug
Impedance	50 Ohms	50 Ohms
Connection Method	Snap-On	Snap-On
Mating Cycles	100	100
Contact Material & Plating	Beryllium Copper, G	old Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Outer Cond Material & Plati	ng Brass, Gold	Brass, Gold
Body Material & Plating	Brass, Gold	Brass, Gold

Mechanical Specification Notes:

Environmental Specifications

Temperature

Operating Range

-55 to +155 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

Example: FMCA1450-12 = 12 inches long cable

FMCA1450-100cm = 100 cm long cable

^{*}All cable assemblies have a length tolerance of 1.5% or \pm 3/8", whichever is greater.





Snap-On RA MMBX Plug to RA Snap-On MMBX Plug Cable RG316-DS Coax in 4 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Snap-On RA MMBX Plug to RA Snap-On MMBX Plug Cable RG316-DS Coax in 4 Inch FMCA1450-4


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/ra-mmbx-plug-ra-mmbx-plug-cable-rg316-ds-coax-fmca1450-4-p.aspx

to impleme	nt improvements	s. Fairview	Microw	ave reserv	es the righ	nt to mak	ke such	changes	as requ	uired. l	Jnless	otherwise
	specifications are											
suitability o	of the part descri	bed hereir	for any	particular	purpose,	and Fair	rview M	icrowave	does r	not assi	ıme aı	ny liability
arising out	of the use of any	part or do	cument	ation.								





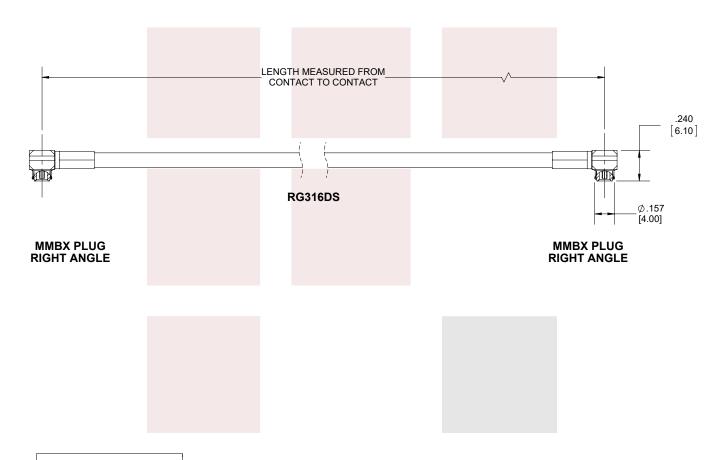

STANDARD TOLERANCES
.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.					
TITLE	DWG NO FMCA14	CAGE CODE 3FKR5				
Snap-On RA MMBX Plug to RA Snap-On MMBX Plug Cable RG316-DS Coax in 4 Inch	CAD FILE 062217	SHEET 1 OF 1	SCAL	E N/A	SIZE A	9999