



SSMC Jack Bulkhead to SSMC Jack Bulkhead Cable RG178 Coax

Fairview Microwave's SSMC cable assemblies are part of our full line of RF interconnects available for same-day shipping. These SSMC cable assemblies are designed for test applications or connection of your SSMC system components. With a high frequency range up to 12.4 GHz, this family of SSMC cables can also be used to connect your data acquisition system or SSMC connections on your A/D converters. There are hundreds of possible cable assembly configurations to choose from, all available same day.

This SSMC cable assembly datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave not only has many SSMC cable assembly options, but also a wide selection of RF, microwave and millimeter wave cable assemblies which allows RF designers to customize their configurations to whatever is required. Whether the need is to provide low loss SSMC I/O for digital receivers or simply create a custom cable assembly configuration, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom RF cable assemblies for you and ship same day.

Electrical Specifications

Description	Min	Т	ур	Max	ι	Inits
Frequency Range	DC			3		GHz
VSWR				1.44:1		
Velocity of Propagation		-	70			%
Capacitance		29.4	96.46]	pF/f	t [pF/m]
Operating Voltage (AC)				250	١	/rms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.4	1	3		GHz
						dB/m
Insertion Loss (Typ.)	0.14	0.28	0.44	0.78		dB/ft
	0.46	0.92	1.44	2.56		dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Diameter 0.156 in [3.96 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields

RG178 50 Ohms Stranded Copper Clad Steel, Silver PTFE 1



Configuration:

- SSMC Jack Bulkhead
- SSMC Jack Bulkhead
- RG178

Features:

- Reliable threaded SSMC cable connection
- Max. Operating Frequency of 3 GHz
- Small form factor (SSMC connection is 50% smaller than SMA)
- In stock and ready to ship

Applications:

- Software Defined Radio (SDR)
- Data acquisition systems with SSMC connections
- Digital Wideband Receivers
- · SSMC patch panels
- A/D Conversion

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Shield Layer 1 Silver Plated Copper Braid

Jacket Material FEP, Tan

Jacket Diameter 0.072 in [1.83 mm]

Repeated Minimum Bend Radius 0.4 in [10.16 mm]

Connectors

Description	Connector 1	Connector 2			
Туре	SSMC Jack	SSMC Jack			
Mount Method	Bulkhead	Bulkhead			
Impedance	50 Ohms	50 Ohms			
Mating Cycles	500	500			
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold			
Contact Plating Spec.	MIL-G-45204	MIL-G-45204			
Dielectric Type	Teflon	Teflon			
Outer Cond Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold			
Outer Cond Plating Spec.	MIL-G-45204	MIL-G-45204			
Body Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold			
Body Plating Spec.	MIL-G-45204	MIL-G-45204			
Torque	1.75 in-lbs [0.2 Nm]	1.75 in-lbs [0.2 Nm]			

Mechanical Specification Notes:

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration: FMCA1460 - xx uu

- cm = Centimeters <blank> = Inches

- Length

Example: FMCA1460-12 = 12 inches long cable

FMCA1460-100cm = 100 cm long cable

^{*}All cable assemblies have a length tolerance of 1.5% or \pm 3/8", whichever is greater.





SSMC Jack Bulkhead to SSMC Jack Bulkhead Cable RG178 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SSMC Jack Bulkhead to SSMC Jack Bulkhead Cable RG178 Coax FMCA1460


The information contained in this document is accurate to the best of our knowledge and representative of the part

URL: https://www.fairviewmicrowave.com/ssmc-jack-ssmc-jack-cable-rg178-coax-fmca1460-p.aspx

described	herein. It	may be	necessar	y to ma	ke modifica	tions to the	part a	nd/or tl	ne docume	ntation of	the part	, in order
to impleme	ent improv	ements.	Fairview	/ Microw	ave reserve	s the right	to mak	e such o	changes as	required.	Unless	otherwise
stated, all	specificati	ons are	nominal.	Fairvie	w Microway	e does not	make	any rep	resentatio	n or warraı	nty rega	rding the
suitability	of the par	t describ	ed hereir	for any	y particular	purpose, a	nd Fair	view Mi	crowave d	oes not ass	sume ar	y liability
arising out	t of the use	e of any	part or do	ocument	tation.							





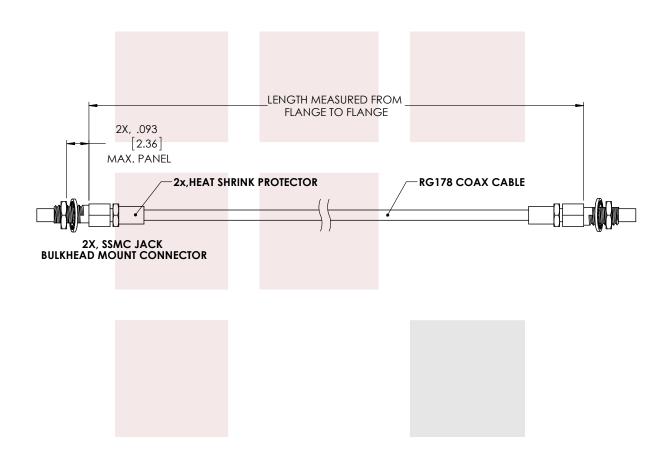

STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
SSMC Jack Bulkhead to SSMC Jack Bulkhead Cable	DWG NO FMCA1460				CAGE CODE 3FKR5		
RG178 Coax	CAD FILE 11/06/2017	SHEET	SCAL	E N/A	SIZE A	CN2245	