

## Low Loss RA N Male to SMA Female Bulkhead Cable LL160 Coax in 36 Inch

The RA N Male to SMA Female Bulkhead low loss cable using LL160 coax, part number FMCA1720-36, from Fairview Microwave is in-stock and ships same day. This N to SMA low loss cable assembly features a 82.5% velocity dielectric manufactured from expanded PTFE tape. This microporous dielectric contributes to the low loss and phase stability of the cables. Our triple shielded coaxial cable construction of Fairview's low loss LL160 provides shielding levels as high as 95 dB. The precision connections are constructed with stainless steel bodies and high temperature insulators, supporting a wide range of temperature from -55 to +165 degrees C. This solid combination of connectors and low loss coax are further enhanced with the addition of heavy-duty heat shrink for improved strain relief for this superior quality RF cable assembly.

Fairview's RA N Male to SMA Female Bulkhead low loss cable FMCA1720-36 datasheet, specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and high speed digital connections allows designers to configure and customize their signals however they like. From reducing losses or improving phase stability, Fairview microwave has the right low loss cable solutions to meet your needs.

### Electrical Specifications

| Description             | Min | Typ        | Max    | Units        |
|-------------------------|-----|------------|--------|--------------|
| Frequency Range         | DC  |            | 18     | GHz          |
| VSWR                    |     |            | 1.33:1 |              |
| Velocity of Propagation |     | 82.5       |        | %            |
| RF Shielding            | -90 |            |        | dB           |
| Capacitance             |     | 25 [82.02] |        | pF/ft [pF/m] |

### Performance by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 1    | 2    | 4.5  | 9    | 18   | GHz   |
| Insertion Loss (Typ.) | 0.44 | 0.63 | 0.95 | 1.37 | 1.97 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of  $0.04 \cdot \sqrt{F(\text{GHz})}$  dB maximum for the straight connector and  $0.10 \cdot \sqrt{F(\text{GHz})}$  dB maximum for the right angle connector.

### Mechanical Specifications

#### Cable Assembly

|         |                    |
|---------|--------------------|
| Length* | 36 in [914.4 mm]   |
| Weight  | 0.19 lbs [86.18 g] |

#### Cable

|                                      |                |
|--------------------------------------|----------------|
| Cable Type                           | LL160          |
| Impedance                            | 50 Ohms        |
| Inner Conductor Type                 | Solid          |
| Inner Conductor Material and Plating | Copper, Silver |



### Configuration:

- N Male Right Angle
- SMA Female Bulkhead
- LL160


### Features:

- Max Frequency 18 GHz
- Shielding Effectivity > -90 dB
- 82.5% Phase Velocity
- Triple Shielded
- FEP Jacket
- Low VSWR of 1.33:1 to 18 GHz
- -55 to +150 Temperature Range
- Expanded PTFE Tape Dielectric
- Same Day Shipment of Custom Lengths

### Applications:

- General Purpose
- Laboratory Use
- Automated Test Systems
- Military Electronics
- Phased Array Antennas
- RF Countermeasures

### Cable Diagram:



Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

|                              |                      |
|------------------------------|----------------------|
| Dielectric Type              | PTFE                 |
| Number of Shields            | 3                    |
| Shield Layer 1               | Silver Plated Copper |
| Shield Layer 2               | Aluminum Polyester   |
| Shield Layer 3               | Silver Plated Copper |
| Jacket Material              | FEP                  |
| Jacket Diameter              | 0.16 in [4.06 mm]    |
| Repeated Minimum Bend Radius | 0.8 in [20.32 mm]    |

**Connectors**

| Description                     | Connector 1                | Connector 2                |
|---------------------------------|----------------------------|----------------------------|
| Type                            | N Male                     | SMA Female                 |
| Mount Method                    |                            | Bulkhead                   |
| Impedance                       | 50 Ohms                    | 50 Ohms                    |
| Contact Material & Plating      | Beryllium Copper, Gold     | Beryllium Copper, Gold     |
| Contact Plating Spec.           | ASTM-B488                  | ASTM-B488                  |
| Dielectric Type                 | PTFE                       | PTFE                       |
| Outer Cond Material & Plating   |                            | Passivated Stainless Steel |
| Body Material & Plating         | Passivated Stainless Steel | Passivated Stainless Steel |
| Coupling Nut Material & Plating | Passivated Stainless Steel |                            |

**Environmental Specifications**

|                    |                   |
|--------------------|-------------------|
| <b>Temperature</b> |                   |
| Operating Range    | -55 to +165 deg C |

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**How to Order**

Part Number Configuration:

**FMCA1720 - xx uu**

cm = Centimeters  
<blank> = Inches  
Length

Example: FMCA1720-12 = 12 inches long cable  
FMCA1720-100cm = 100 cm long cable


Low Loss RA N Male to SMA Female Bulkhead Cable LL160 Coax in 36 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [Low Loss RA N Male to SMA Female Bulkhead Cable LL160 Coax in 36 Inch FMCA1720-36](#)

URL: <https://www.fairviewmicrowave.com/low-loss-ra-n-male-sma-female-cable-ll160-coax-fmca1720-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



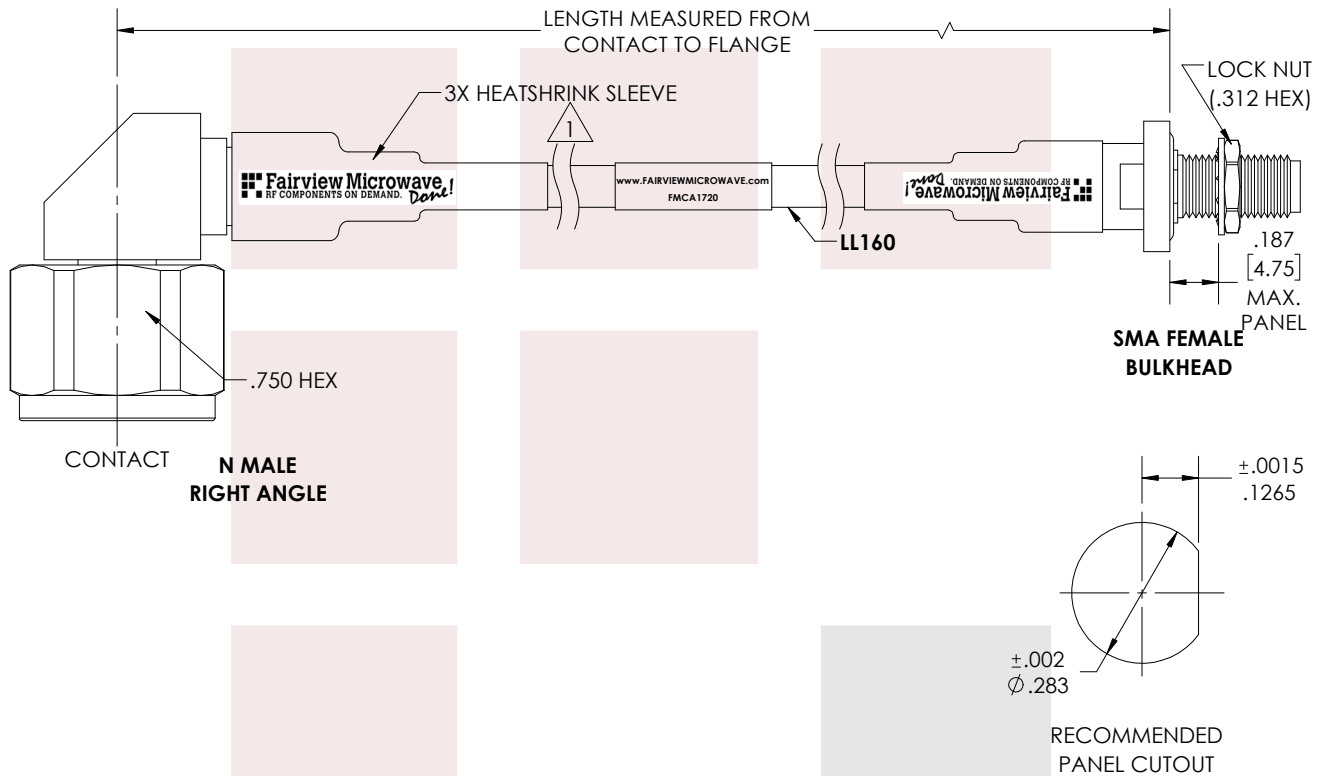

**NOTES:**

1. BLACK HEAT SHRINK WITH WHITE MARKINGS 3 PLACES.

**STANDARD TOLERANCES**

- .X  $\pm 0.2$
- .XX  $\pm 0.01$
- .XXX  $\pm 0.005$

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

|   |       |   |                    |
|---|-------|---|--------------------|
| <b>FAIRVIEW MICROWAVE INC.</b>  |       | NOTES:<br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES [mm]. |                    |
| ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM   |       |   |                    |
| TITLE<br>Low Loss RA N Male to SMA Female Bulkhead Cable<br>LL160 Coax in 36 Inch |       | DWG NO<br>FMCA1720  | CAGE CODE<br>3FKR5 |
| CAD FILE 07/18/18   | SHEET | SCALE N/A   | SIZE A CN2379      |