

2.92mm Male to 2.92mm Male Cable 60 Inch Length Using FM-103FLEX Coax

The 2.92mm male to 2.92mm male 60 inch cable using FM-103FLEX coax, part number FMCA1975-60, from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm flexible FM-103FLEX coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1975-60 2.92mm male to 2.92mm male cable assembly operates to 45 GHz. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		45	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	90			dB
Capacitance		26 [85.3]		pF/ft [pF/m]
Inductance		65 [213.25]		uH/ft [uH/m]
Input Power (Peak)			550	Watts

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	10	20	45	GHz
Insertion Loss (Max.)	2.38	3.36	4.77	6.93	10.87	dB
Insertion Loss (Typ.)	2.18	3.07	4.36	6.32	9.9	dB

Mechanical Specifications

Cable Assembly

Length*	60 in [152.4 cm]
Diameter	0.38 in [9.65 mm]

Cable

Cable Type	FM-103FLEX
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	3
Shield Layer 1	Silver Plated Copper
Shield Layer 2	Conductive Tape



Configuration:

- 2.92mm Male
- 2.92mm Male
- FM-103FLEX

Features:

- Max Frequency 45 GHz
- Shielding Effectivity > 90 dB
- 76% Phase Velocity
- Triple Shielded
- ETFE Jacket

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Shield Layer 3	Silver Plated Copper
Jacket Material	ETFE, Gray
Jacket Diameter	0.103 in [2.62 mm]
One Time Minimum Bend Radius	0.32 in [8.13 mm]
Repeated Minimum Bend Radius	0.96 in [24.38 mm]
Typical Flex Cycles	500,000

Connectors

Description	Connector 1	Connector 2
Type	2.92mm Male	2.92mm Male
Impedance	50 Ohms	50 Ohms
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Spec.	ASTM-B488 50µ In. Min	ASTM-B488 50µ In. Minimum
Dielectric Type	PPO	PPO
Body Material & Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Spec.	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material & Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Spec.	SAE-AMS-2700	SAE-AMS-2700
Hex Size	5/16 Inch	5/16 Inch
Torque	8 in-lbs 0.9 Nm	8 in-lbs 0.9 Nm

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range -45 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

- Values at 25°C, sea level.

How to Order

Part Number Configuration:

FMCA1975 - xx uu

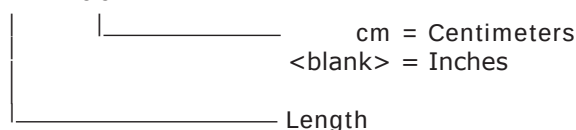


Example: FMCA1975-12 = 12 inches long cable
 FMCA1975-100cm = 100 cm long cable

2.92mm Male to 2.92mm Male Cable 60 Inch Length Using FM-103FLEX Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [2.92mm Male to 2.92mm Male Cable 60 Inch Length Using FM-103FLEX Coax FMCA1975-60](https://www.fairviewmicrowave.com/2.92mm-male-2.92mm-male-FM-103FLEX-cable-assembly-FMCA1975-60-p.aspx)

URL: <https://www.fairviewmicrowave.com/2.92mm-male-2.92mm-male-FM-103FLEX-cable-assembly-FMCA1975-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

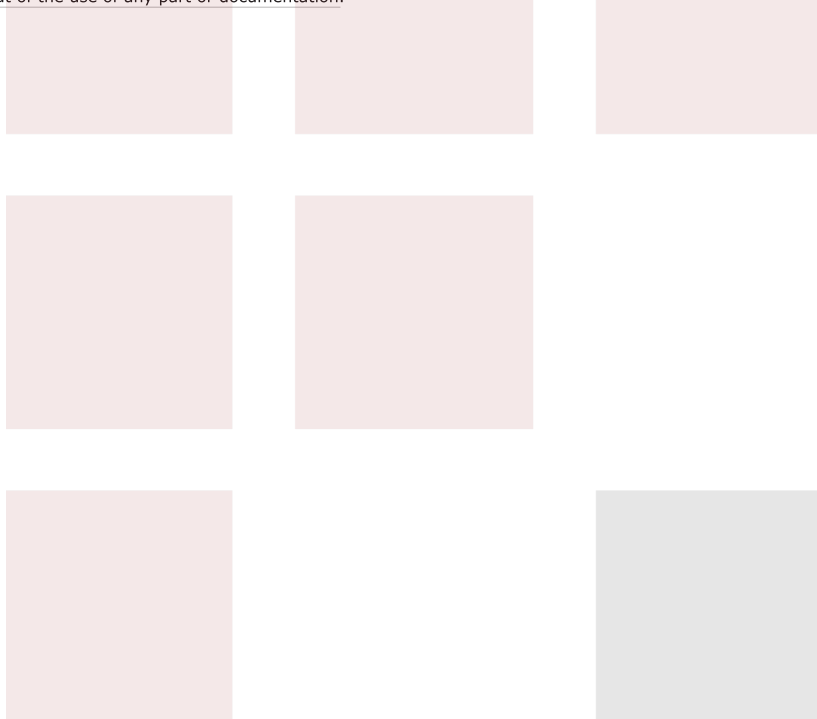

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/08/19	S.ELLIS

5/16 HEX
TYP

2X
HEAT SHRINK SLEEVE

CONTACT

2.92mm MALE

LENGTH MEASURED FROM
CONTACT TO CONTACT

FM-103FLEX

FM LABEL

CONTACT

2.92mm MALE

FM LABEL:

www.FAIRVIEWMICROWAVE.com

FMCA1975

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT
ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

Fairview Microwave an INFINITE brand TITLE 2.92mm Male to 2.92mm Male Cable 60 Inch Length Using FM-103FLEX Coax	
--	--

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		THIRD-ANGLE PROJECTION	
TOLERANCES:		CABLE LENGTH (L) TOLERANCES:	
.X = ±.2 [5.08] FRACTIONS ± 1/32		L ≤ 12 [305] = +1 [25] / -0	
.XX = ±.02 [.51] ± 1/32		12 [305] < L ≤ 60 [1524] = +2 [51] / -0	
.XXX = ±.005 [.13] ANGLES ± 1°		60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	
		120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	
		300 [7620] < L = +5%L / -0	
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.			
SIZE	CAGE CODE	DRAWN BY	PART NUMBER
A	3FKR5	K.DANG	FMCA1975

REV	A
-----	---