

## Low PIM 2.2-5 Male to RA N Male Cable TFT-5G-402 Coax in 60 Inch Using Times Microwave Components



### FMCA2527-60

#### Configuration

- Connector 1: 2.2-5 Male
- Connector 2: N Male Right Angle
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

#### Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

#### Description

The 2.2-5 male to RA type N male 60 inch cable using TFT-5G-402 coax, part number FMCA2527-60, from Fairview Microwave is in-stock and ships same day. This Fairview 2.2-5 to type N cable assembly has a male to male gender configuration with 50 ohm flexible TFT-5G-402 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. Our low PIM design offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The FMCA2527-60 2.2-5 male to type N male cable assembly operates to 5.8 GHz. The right angle type N interface on the TFT-5G-402 cable allows for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	80			dB
Passive Intermodulation			-160	dBc
IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz				

Low PIM 2.2-5 Male to RA N Male Cable TFT-5G-402 Coax in 60 Inch Using Times Microwave Components



**FMCA2527-60**

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Capacitance		26.7 [87.6]		pF/ft [pF/m]

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.44	0.59	0.79	1.21	1.82	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of  $0.1 \cdot \sqrt{FGHz}$  dB for the straight connector and 0.1 dB for the right angle connector.

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter 0.65 in [16.51 mm]

**Cable**

Cable Type TFT-5G-402  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PTFE  
 Number of Shields 2  
 Jacket Material FEP, Blue  
 Jacket Diameter 0.16 in [4.06 mm]  
 One Time Minimum Bend Radius 0.75 in [19.05 mm]

Low PIM 2.2-5 Male to RA N Male Cable TFT-5G-402 Coax in 60 Inch Using Times Microwave Components



**FMCA2527-60**

**Connectors**

Description	Connector 1	Connector 2
Type	2.2-5 Male	N Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Mating Cycles	100	
Contact Material and Plating	Beryllium Copper, Silver	Brass, Silver
Contact Plating Specification	200 μin	5 μm
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Silver	Brass, Tri-Metal
Body Plating Specification	100 μin	3 μm
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 μin	3 μm
Torque	26 in-lbs 2.94 Nm	10 in-lbs 1.13 Nm

**Environmental Specifications**

Operating Range Temperature -40 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Low PIM 2.2-5 Male to RA N Male Cable TFT-5G-402 Coax in 60 Inch Using Times Microwave Components




**FMCA2527-60**

**Typical Performance Data**

**How to Order**

Part Number Configuration:

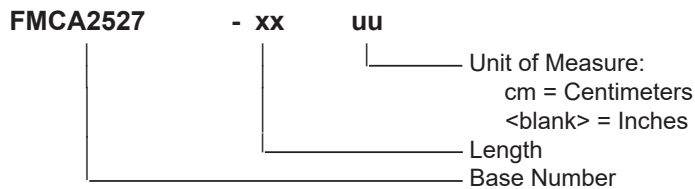

Example: FMCA2527-12 = 12 inches long cable  
FMCA2527-100cm = 100 cm long cable

Low PIM 2.2-5 Male to RA N Male Cable TFT-5G-402 Coax in 60 Inch Using Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [Low PIM 2.2-5 Male to RA N Male Cable TFT-5G-402 Coax in 60 Inch Using Times Microwave Components FMCA2527-60](https://www.fairviewmicrowave.com/product/rf-cable-assemblies/low-pim-2.2-5-male-to-ra-n-male-cable-tft-5g-402-coax-in-60-inch-using-times-microwave-components-fmca2527-60)

URL: <https://www.fairviewmicrowave.com/product/rf-cable-assemblies/low-pim-2.2-5-male-to-ra-n-male-cable-tft-5g-402-coax-in-60-inch-using-times-microwave-components-fmca2527-60.html>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMCA2527-60 CAD Drawing

Low PIM 2.2-5 Male to RA N Male Cable TFT-5G-402 Coax in 60 Inch Using Times Microwave Components

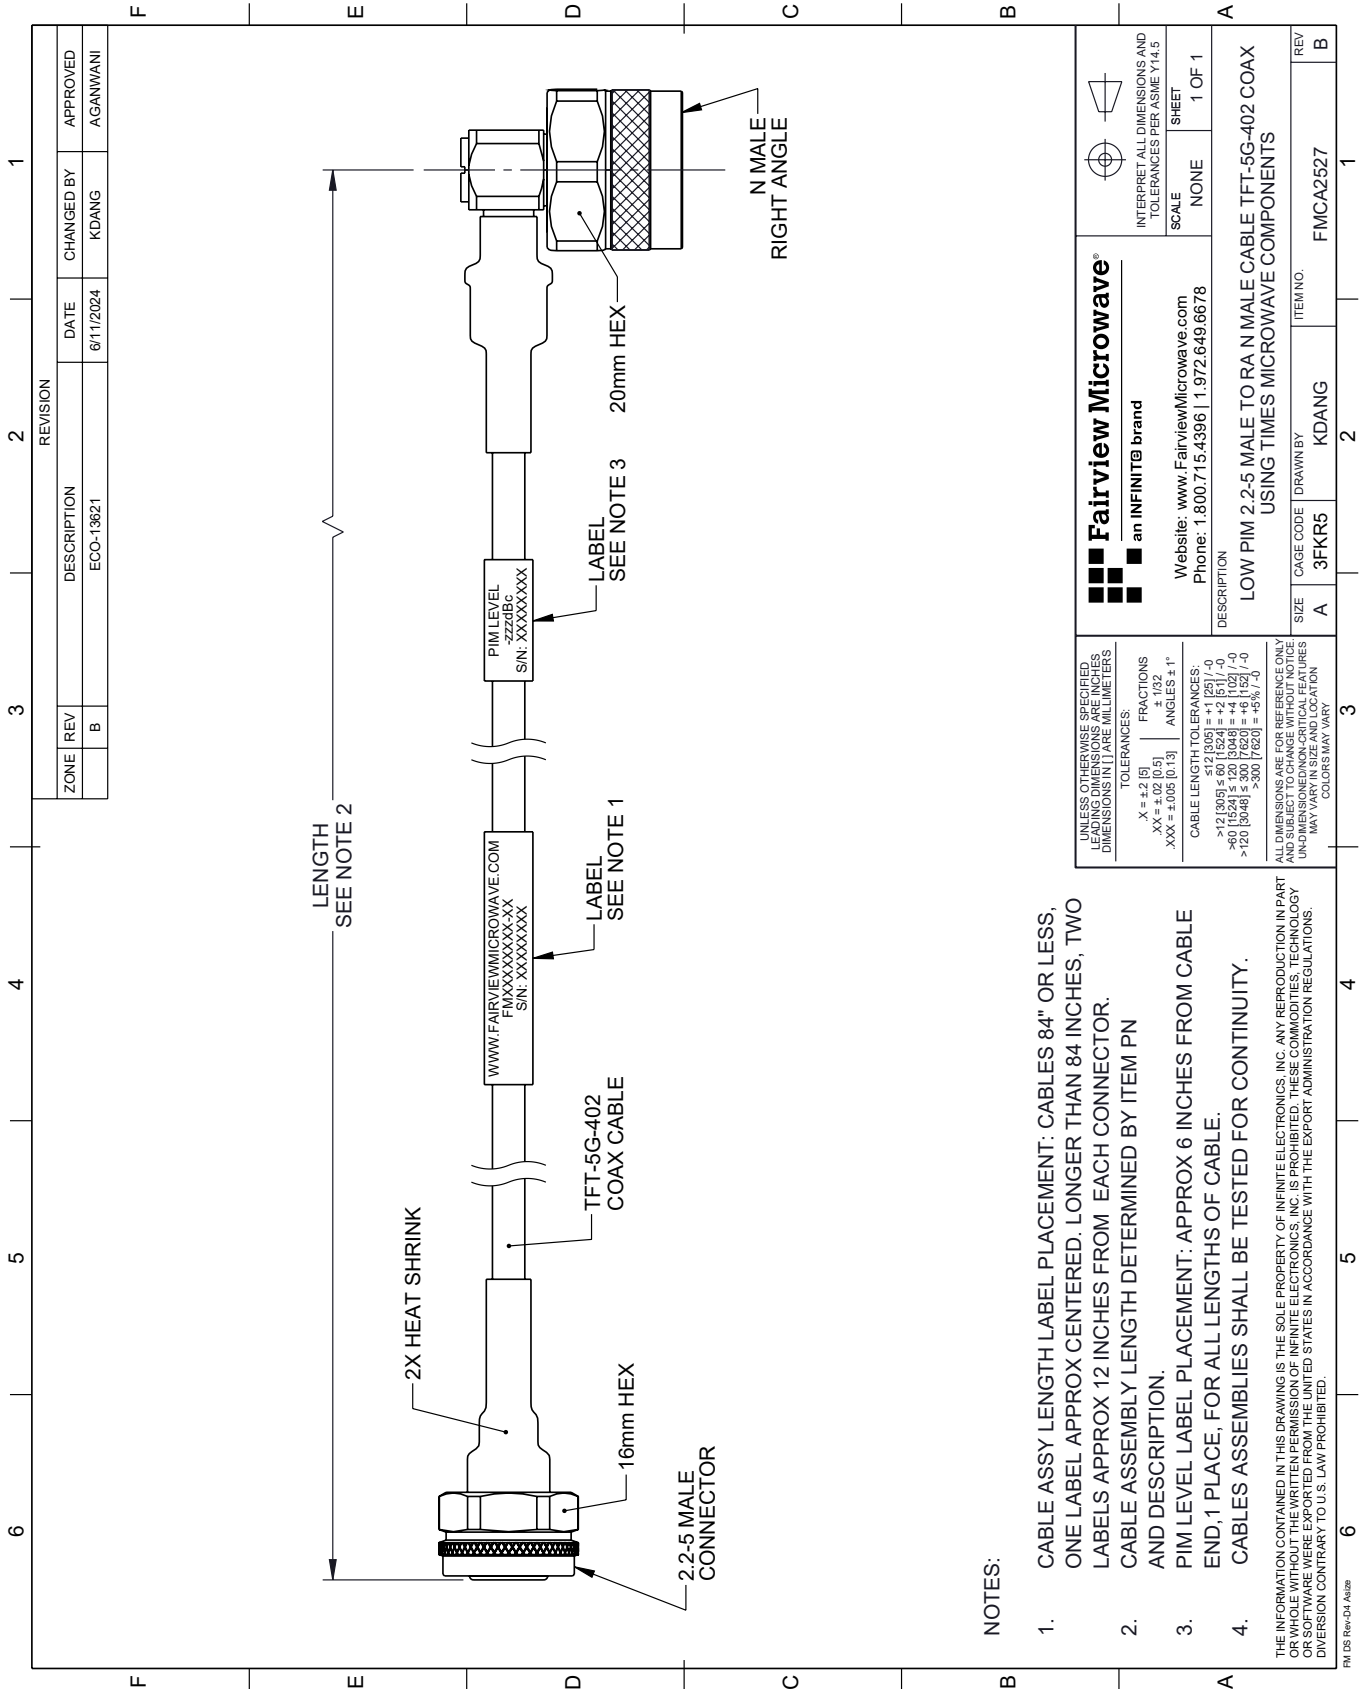

**NOTES:**

- CABLE ASSY LENGTH LABEL PLACEMENT: CABLES 84" OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 84 INCHES, TWO LABELS APPROX 12 INCHES FROM EACH CONNECTOR.
- CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
- PIM LEVEL LABEL PLACEMENT: APPROX 6 INCHES FROM CABLE END, 1 PLACE, FOR ALL LENGTHS OF CABLE.
- CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.