

FMCA2815-48 DATA SHEET

N Female to N Female Cable RG402 Type .141 Coax in 48 Inch

The type N female to type N female 48 inch cable using RG402 type .141 coax, part number FMCA2815-48, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a female to female gender configuration with 50 ohm semi-rigid FM-SR141CU-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA2815-48 type N female to type N female cable assembly operates to 11 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Min | Т | ур | Max | Units |
|-------------------------|-----|----|-----|-------|-------|
| Frequency Range | DC | | | 11 | GHz |
| VSWR | | | | 1.5:1 | |
| Velocity of Propagation | | 69 | 9.5 | | % |

Performance by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|-----|------|------|----|-------|
| Frequency | 1 | 2.5 | 5 | 11 | | GHz |
| Insertion Loss (Typ.) | 0.68 | 0.9 | 1.27 | 2.03 | | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length* 48 in [121.92 cm]
Weight 0.264 lbs [119.75 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields

Outer Conductor Material and Plating

Repeated Minimum Bend Radius

FM-SR141CU-STR

50 Ohms Solid

Copper Clad Steel, Silver

PTFE 1 Copper

0.25 in [6.35 mm]



Configuration:

- N Female
- N Female
- FM-SR141CU-STR

Features:

- Max Frequency 11 GHz
- 69.5% Phase Velocity

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678


Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Connectors

| Description | Connector 1 | Connector 2 |
|----------------------------|-------------------------------|-------------------------------------|
| Туре | N Female | N Female |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material & Plating | Phosphor Bronze, Gold over Ni | ckelPhosphor Bronze, Gold over Nicl |
| Dielectric Type | PTFE | PTFE |
| Body Material & Plating | Brass, Nickel | Brass, Nickel |
| | | |

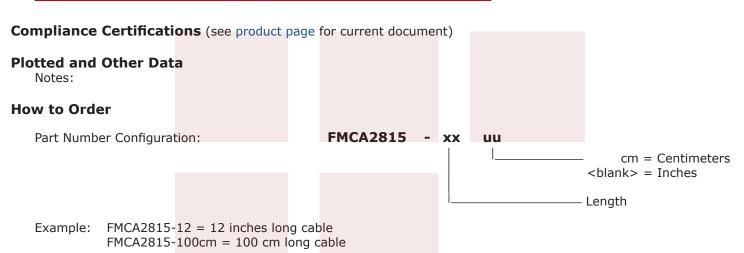

N Female to N Female Cable RG402 Type .141 Coax in 48 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: N Female to N Female Cable RG402 Type .141 Coax in 48 Inch FMCA2815-48

URL: https://www.fairviewmicrowave.com/n-female-to-n-female-cable-rg402-type-.141-coax-fmca2815-48-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





