

## BNC Male to BNC Female Bulkhead Cable Tinned Aluminum RG402 Type .141 Coax in 24 Inch

The BNC male to BNC female bulkhead cable using Tinned Aluminum RG402 type .141 coax, part number FMCA2850-24, from Fairview Microwave is in-stock and ships same day. This Fairview BNC to BNC cable assembly has a male to female gender configuration with 50 ohm semi-rigid FM-SR141ALTN-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

| Description             | Min | Typ  | Max | Units |
|-------------------------|-----|------|-----|-------|
| Velocity of Propagation |     | 69.5 |     | %     |

### Mechanical Specifications

#### Cable Assembly

|         |                     |
|---------|---------------------|
| Length* | 24 in [609.6 mm]    |
| Weight  | 0.076 lbs [34.47 g] |

#### Cable

|                                      |                           |
|--------------------------------------|---------------------------|
| Cable Type                           | FM-SR141ALTN-STR          |
| Impedance                            | 50 Ohms                   |
| Inner Conductor Type                 | Solid                     |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type                      | PTFE                      |
| Number of Shields                    | 1                         |
| Outer Conductor Material and Plating | Tinned Aluminum           |
| Repeated Minimum Bend Radius         | 0.15 in [3.81 mm]         |



### Configuration:

- BNC Male
- BNC Female Bulkhead
- FM-SR141ALTN-STR

### Features:

- 69.5% Phase Velocity

### Applications:

- General Purpose
- Laboratory Use

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

## Connectors

| Description                     | Connector 1     | Connector 2   |
|---------------------------------|-----------------|---------------|
| Type                            | BNC Male        | BNC Female    |
| Mount Method                    |                 | Bulkhead      |
| Specification                   | MIL-STD-348A    |               |
| Impedance                       | 50 Ohms         | 50 Ohms       |
| Contact Material & Plating      | Brass, Gold     |               |
| Contact Plating Spec.           | 30 µin minimum  |               |
| Dielectric Type                 | PTFE            |               |
| Body Material & Plating         | Brass, Gold     | Brass, Nickel |
| Body Plating Spec.              | 3 µin minimum   |               |
| Coupling Nut Material & Plating | Brass, Nickel   |               |
| Coupling Nut Plating Spec.      | 100 µin minimum |               |

**Compliance Certifications** (see [product page](#) for current document)

## Plotted and Other Data

Notes:

## How to Order

Part Number Configuration:

**FMCA2850 - xx uu**

cm = Centimeters  
 <blank> = Inches  
 Length

Example: FMCA2850-12 = 12 inches long cable  
 FMCA2850-100cm = 100 cm long cable


BNC Male to BNC Female Bulkhead Cable Tinned Aluminum RG402 Type .141 Coax in 24 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [BNC Male to BNC Female Bulkhead Cable Tinned Aluminum RG402 Type .141 Coax in 24 Inch FMCA2850-24](#)

URL: <https://www.fairviewmicrowave.com/bnc-male-to-bnc-female-bulkhead-cable-tinned-aluminum-rg402-type-.141-coax-fmca2850-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

| REVISIONS |                 |            |          |
|-----------|-----------------|------------|----------|
| REV.      | DESCRIPTION     | DATE       | APPROVED |
| A         | INITIAL RELEASE | 07/20/2022 | AGANWANI |

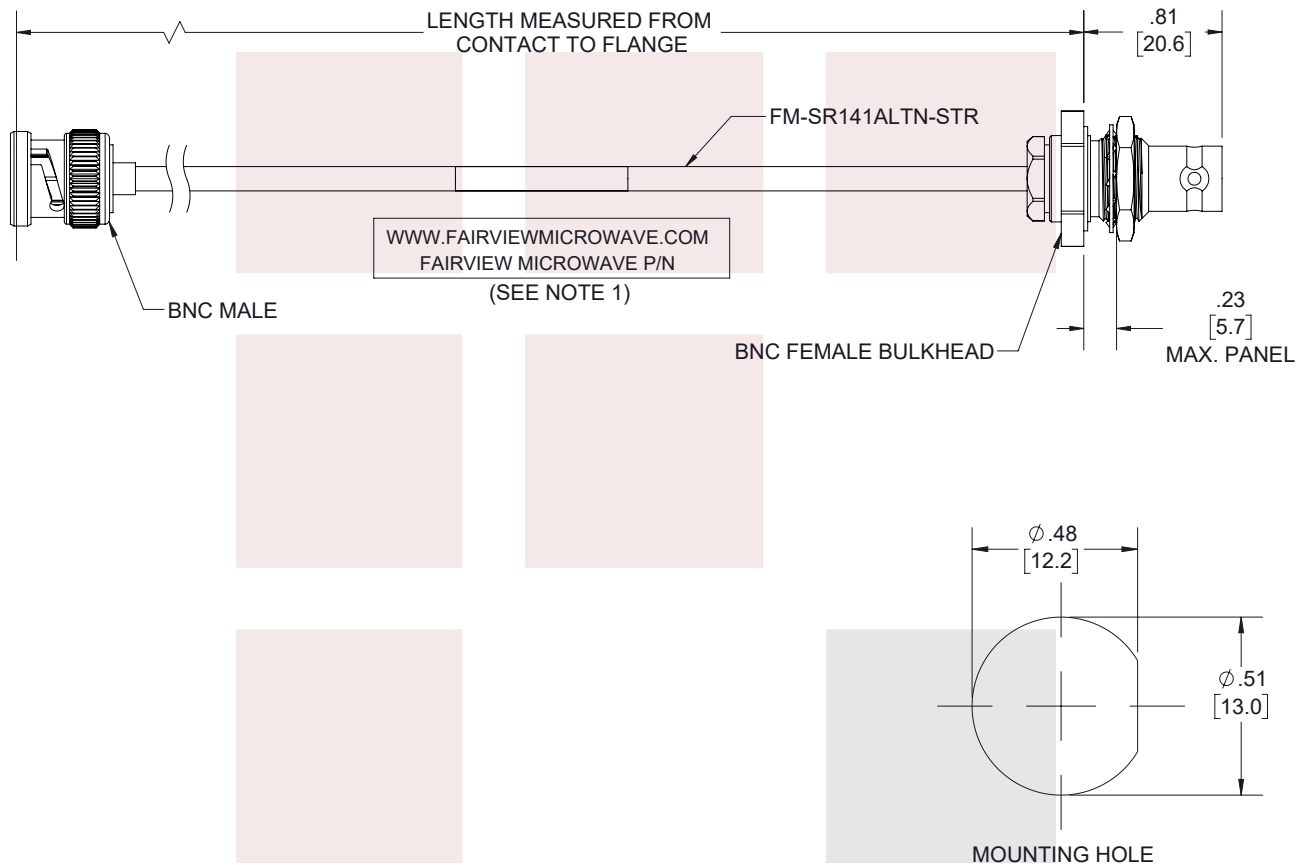

**NOTES:**

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.  
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END  
6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE

BNC Male to BNC Female Bulkhead Cable Tinned  
Aluminum RG402 Type .141 Coax in 24 Inch

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08] FRACTIONS  
.XX = ±.02 [.51] ± 1/32  
.XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0  
12 [305] < L ≤ 60 [1524] = +2 [51] / -0  
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0  
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  
300 [7620] < L = +5%L / -0

THIRD-ANGLE PROJECTION



THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
FAIRVIEW MICROWAVE CORPORATION.  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE

N/A

| SIZE | CAGE CODE | DRAWN BY  | ITEM NO. | REV |
|------|-----------|-----------|----------|-----|
| A    | 3FKR5     | PSRINIVAS | FMCA2850 | A   |

T-Rev.D