

## RA QMA Male to RA QMA Male Cable Tinned Copper RG402 Type .141 Coax in 150 CM

The RA QMA male to RA QMA male 150 cm cable using Tinned Copper RG402 type .141 coax, part number FMCA2887-150CM, from Fairview Microwave is in-stock and ships same day. This Fairview QMA to QMA cable assembly has a male to male gender configuration with 50 ohm semi-rigid FM-SR141CUTN-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA2887-150CM QMA male to QMA male cable assembly operates to 18 GHz. The right angle QMA interfaces on the FM-SR141CUTN-STR cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

| Description             | Min | Typ  | Max   | Units |
|-------------------------|-----|------|-------|-------|
| Frequency Range         | DC  |      | 18    | GHz   |
| VSWR                    |     |      | 1.5:1 |       |
| Velocity of Propagation |     | 69.5 |       | %     |

### Performance by Frequency

| Description           | F1 | F2   | F3   | F4   | F5  | Units |
|-----------------------|----|------|------|------|-----|-------|
| Frequency             | 1  | 2    | 4.5  | 9    | 18  | GHz   |
| Insertion Loss (Typ.) | 1  | 1.17 | 1.63 | 2.44 | 3.6 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2 dB per connector.

### Mechanical Specifications

#### Cable Assembly

|         |                      |
|---------|----------------------|
| Length* | 59.06 in [150.01 cm] |
| Weight  | 0.185 lbs [83.91 g]  |

#### Cable

|                                      |                           |
|--------------------------------------|---------------------------|
| Cable Type                           | FM-SR141CUTN-STR          |
| Impedance                            | 50 Ohms                   |
| Inner Conductor Type                 | Solid                     |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type                      | PTFE                      |
| Outer Conductor Material and Plating | Tinned Copper             |

|                              |                |
|------------------------------|----------------|
| One Time Minimum Bend Radius | 1 in [25.4 mm] |
|------------------------------|----------------|



### Configuration:

- QMA Male Right Angle
- QMA Male Right Angle
- FM-SR141CUTN-STR

### Features:

- Max Frequency 18 GHz
- 69.5% Phase Velocity
- 100 Mating Cycles

### Applications:

- General Purpose
- Laboratory Use

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

## Connectors

| Description                   | Connector 1              | Connector 2              |
|-------------------------------|--------------------------|--------------------------|
| Type                          | QMA Male                 | QMA Male                 |
| Impedance                     | 50 Ohms                  | 50 Ohms                  |
| Mating Cycles                 | 100                      | 100                      |
| Contact Material & Plating    | Brass, Gold over Nickel  | Brass, Gold over Nickel  |
| Contact Plating Spec.         | 0.15 µm minimum          | 0.15 µm minimum          |
| Dielectric Type               | PTFE                     | PTFE                     |
| Outer Cond Material & Plating | Spring Bronze, Tri-Metal | Spring Bronze, Tri-Metal |
| Body Material & Plating       | Brass, Gold              | Brass, Gold              |
| Body Plating Spec.            | 0.15 µm minimum          | 0.15 µm minimum          |

## Environmental Specifications

### Temperature

Operating Range -40 to +85 deg C

## Compliance Certifications (see [product page](#) for current document)

## Plotted and Other Data

Notes:

## How to Order

Part Number Configuration:

**FMCA2887 - xx uu**

cm = Centimeters  
 <blank> = Inches

Length

Example: FMCA2887-12 = 12 inches long cable  
 FMCA2887-100cm = 100 cm long cable


RA QMA Male to RA QMA Male Cable Tinned Copper RG402 Type .141 Coax in 150 CM from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [RA QMA Male to RA QMA Male Cable Tinned Copper RG402 Type .141 Coax in 150 CM FMCA2887-150CM](#)

URL: <https://www.fairviewmicrowave.com/ra-qma-male-to-ra-qma-male-cable-tinned-copper-rg402-type-.141-coax-in-150-cm-fmca2887-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

| REVISIONS |                 |            |          |
|-----------|-----------------|------------|----------|
| REV.      | DESCRIPTION     | DATE       | APPROVED |
| A         | INITIAL RELEASE | 07/22/2022 | AGANWANI |

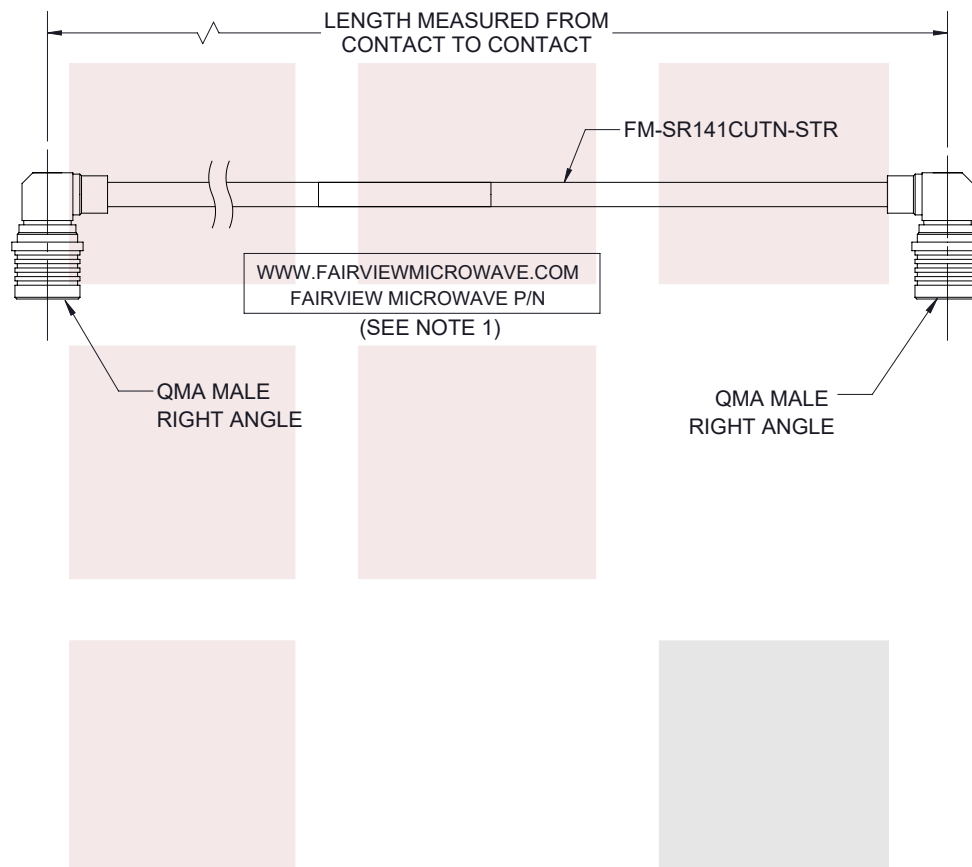

**NOTES:**

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.  
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END  
6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE

RA QMA Male to RA QMA Male Cable Tinned Copper  
RG402 Type .141 Coax in 150 CM

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS


TOLERANCES:

.X = ±.2 [ .51] FRACTIONS  
.XX = ±.02 [ .51] ± 1/32  
.XXX = ±.005 [ .13] ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0  
12 [305] < L ≤ 60 [1524] = +2 [51] / -0  
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0  
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  
300 [7620] < L = +5%L / -0

THIRD-ANGLE PROJECTION



THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
FAIRVIEW MICROWAVE CORPORATION.  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE

N/A

|           |                    |                       |                      |          |
|-----------|--------------------|-----------------------|----------------------|----------|
| SIZE<br>A | CAGE CODE<br>3FKR5 | DRAWN BY<br>PSRINIVAS | ITEM NO.<br>FMCA2887 | REV<br>A |
|-----------|--------------------|-----------------------|----------------------|----------|

T-Rev.D