

FMCA2958-48 DATA SHEET

2.92mm Male to 2.92mm Male Cable RG405 Type .086 Coax in 48 Inch

The 2.92mm male to 2.92mm male 48 inch cable using RG405 type .086 coax, part number FMCA2958-48, from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm semi-rigid FM-SR086CU-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA2958-48 2.92mm male to 2.92mm male cable assembly operates to 40 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Ту	р Мах	Units
Frequency Range	DC		40	GHz
VSWR			1.5:1	

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	10	20	40	GHz
Insertion Loss (Typ.)	1.47	2.11	3.4	5	9.8	dB

Electrical Specification Notes:

Outer Conductor Material and Plating

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Copper

Mechanical Specifications

Cable Assembly

Length* 48 in [121.92 cm] Weight 0.066 lbs [29.94 g]

Cable

Cable Type FM-SR086CU-STR
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1

Repeated Minimum Bend Radius 0.05 in [1.27 mm]



Configuration:

- 2.92mm Male
- 2.92mm Male
- FM-SR086CU-STR

Features:

Max Frequency 40 GHz

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






Connectors

Description	Connector 1	Connector 2	
Туре	2.92mm Male	2.92mm Male	
Impedance	50 Ohms	50 Ohms	
Contact Material & Plating	Beryllium Copper, Gold over	er NickelBeryllium Copper, Gold ove	er Nickel
Contact Plating Spec.	50 μin minimum	50 μin minimum	
Dielectric Type	PCTFE	PCTFE	
Body Material & Plating	Beryllium Copper, Gold over	er NickelBeryllium Copper, Gold ove	er Nickel
Body Plating Spec.	50 µin minimum	50 µin minimum	
Coupling Nut Material & Pla	iting Passivated Stainless S	teel Passivated Stainless Steel	
Hex Size	5/16 inch	5/16 inch	
Torque	8 in-lbs 0.9 Nm	8 in-lbs 0.9 Nm	
vironmental Specific			
Operating Range	-55	to +125 deg C	

Compliance Certifications (see product page for current document)

Plotted and Other Data Notes: How to Order

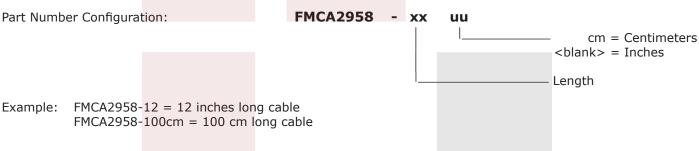

2.92mm Male to 2.92mm Male Cable RG405 Type .086 Coax in 48 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: 2.92mm Male to 2.92mm Male Cable RG405 Type .086 Coax in 48 Inch FMCA2958-48


URL: https://www.fairviewmicrowave.com/2.92mm-male-to-2.92mm-male-cable-rg405-type-.086-coax-fmca2958-48-p. aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





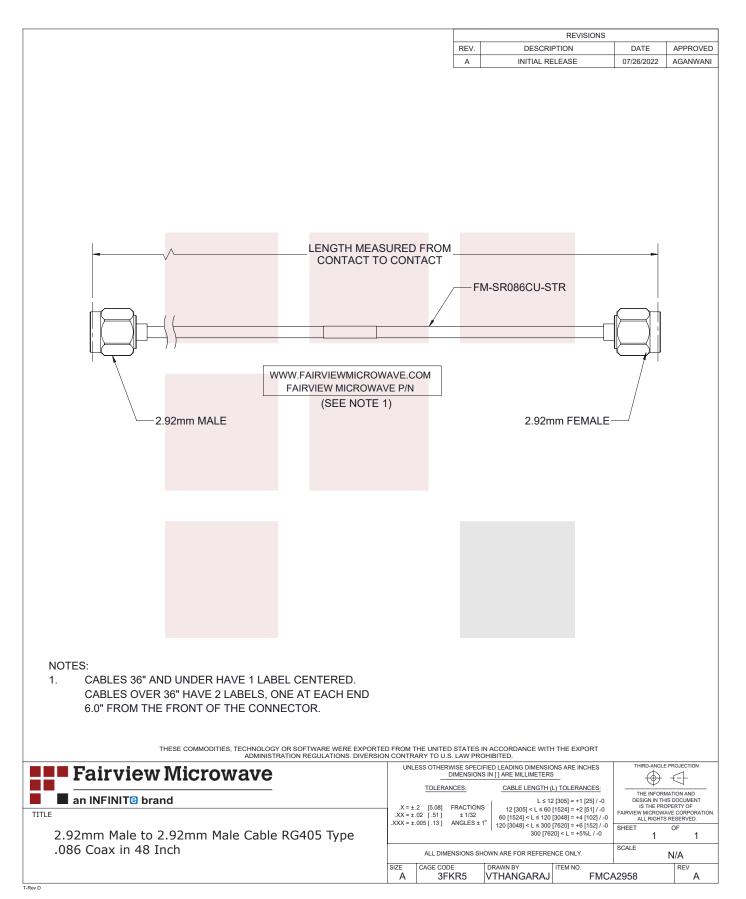

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689