

FMCA3300-24 DATA SHEET

Low Loss RA N Male to RA SMA Male Cable TCOM-240 Coax in 24 Inch with Times Microwave Components

The RA type N male to RA SMA male 24 inch cable using TCOM-240 coax, part number FMCA3300-24, from Fairview Microwave is in-stock and ships same day. This Fairview type N to SMA cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-240 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA3300-24 type N male to SMA male cable assembly operates to 6 GHz. The right angle type N and right angle SMA interfaces on the TCOM-240 cable allow for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	T	ур	Max	Units
Frequency Range	DC			6	GHz
VSWR				1.4:1	

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	6	GHz
Insertion Loss (Typ.)	0.38	0.43	0.5	0.72	0.89	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.25 dB for the SMA male right angle connector and 0.1*SQRT(FGHz) dB for the N male right angle connector.

Mechanical Specifications

Cable Assembly

Length* 24 in [609.6 mm] Weight 0.181 lbs [82.1 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Shield Layer 2
Jacket Material
Jacket Diameter

TCOM-240 50 Ohms Solid Copper PE (F) 2

Silver Plated Copper Braid Tinned Copper Braid

PE, Black

0.24 in [6.1 mm]



Configuration:

- N Male Right Angle
- SMA Male Right Angle
- TCOM-240

Features:

- Max Frequency 6 GHz
- Double Shielded
- PE Jacket
- 500 Mating Cycles

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com

sales@fairviewmicrowave.com





Connectors

Description	Connecto	r 1	Connector 2	
Туре	N Male Threa	aded	SMA Male Threaded	
Specification			MIL-STD-348	
Impedance	50 Ohms	5	50 Ohms	
Mating Cycles	500		500	
Contact Material & Plating	Beryllium Bronz	e, Gold	Brass/Phosphor Bronze, G	Sold
Contact Plating Spec.	50 μin minim	num	50 µinch	
Dielectric Type	PTFE		Teflon	
Body Material & Plating	Brass, Tri-Me	etal	Brass, Tri-Metal	
Body Plating Spec.	80 µin minim	num	80 µinch	
Coupling Nut Material & Pla	ting Brass, Tri-Me	etal	Brass, Tri-Metal	
Coupling Nut Plating Spec.	80 µin minim	num	80 µinch	


Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

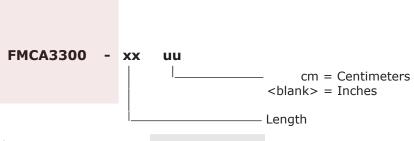

Example: FMCA3300-12 = 12 inches long cable

FMCA3300-100cm = 100 cm long cable

Low Loss RA N Male to RA SMA Male Cable TCOM-240 Coax in 24 Inch with Times Microwave Components from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss RA N Male to RA SMA Male Cable TCOM-240 Coax in 24 Inch with Times Microwave Components FMCA3300-24

URL: https://www.fairviewmicrowave.com/low-loss-ra-n-male-to-ra-sma-male-cable-tcom-240-coax-in-24-inch-with-times-microwave-components-fmca3300-24-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





