

VITA 67 Mini SMP Female to 1.85mm Male Cable FM-F086HF Coax in 6 Inch

FMCA9738-6



Configuration

- Connector 1: Mini SMP Female
- Connector 2: 1.85mm Male
- Cable Type: FM-F086HF
- Coax Cable Group: 2
- Coax Flex Type: Flexible

Features

- Max Frequency 40 GHz
- Shielding Effectivity > 110 dB
- 70% Phase Velocity
- Standard MIL-STD-348 SMPM interface
- Push-on/snap-on mating style for quick installation
- Mini SMP (SMPM) Female compatible with VITA 67 (4-port) and (8-port) blocks
- Mini SMP (SMPM) Male Compatible with VITA 67 (4-port) and (8-port) blocks

Applications

- General Purpose
- Laboratory Use
- Scientific research
- High-reliability, high-density for aerospace & defense application
- Ground base station & communication systems, avionics, radar systems

Description

The Mini SMP female to 1.85mm male 6 inch cable using FM-F086HF coax, part number FMCA9738-6, from Fairview Microwave is in-stock and ships same day. This Fairview Mini SMP to 1.85mm cable assembly has a female to male gender configuration with 50 ohm flexible coax. Fairview Microwave's VITA 67 assemblies are high-density, high-performance, fixed-length RF cable assemblies that fit into VITA 67 blocks and attach to the PCB board which makes it ideal for applications where tight bends and flexure is required. The FMCA9738-6 Mini SMP female to 1.85mm male cable assembly operates to 40 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.45:1	
Velocity of Propagation		70		%
RF Shielding	110			dB

VITA 67 Mini SMP Female to 1.85mm Male
Cable FM-F086HF Coax in 6 Inch



FMCA9738-6

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	10	20	40	GHz
Insertion Loss (Typ.)	0.38	0.46	0.58	0.73	1.06	dB

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Cable Assembly

Length 6 in [152.4 mm]
Weight 0.26 lbs [117.93 g]

Cable

Cable Type FM-F086HF
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Shield Layer 1 Silver Plated Copper Tape

Connectors

Description	Connector 1	Connector 2
Type	Mini SMP Female	1.85mm Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold over Nickel
Contact Plating Specification	ASTM B488	MIL-G-45204
Body Material and Plating	Beryllium Copper, Gold	Stainless Steel, Gold over Nickel
Body Plating Specification	ASTM B488	MIL-G-45204

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

VITA 67 Mini SMP Female to 1.85mm Male Cable FM-F086HF Coax in 6 Inch



FMCA9738-6

Values at 25°C, sea level.

Typical Performance Data

How to Order

Part Number Configuration:

FMCA9738

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: FMCA9738-12 = 12 inches long cable
FMCA9738-100cm = 100 cm long cable

VITA 67 Mini SMP Female to 1.85mm Male Cable FM-F086HF Coax in 6 Inch from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [VITA 67 Mini SMP Female to 1.85mm Male Cable FM-F086HF Coax in 6 Inch FMCA9738-6](#)

URL: <https://www.fairviewmicrowave.com/vita-67-mini-smp-female-to-1.85mm-male-cable-fm-f086hf-coax-in-6-inch-fm-ca9738-6-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMCA9738-6 CAD Drawing

VITA 67 Mini SMP Female to 1.85mm Male Cable FM-F086HF Coax in 6 Inch

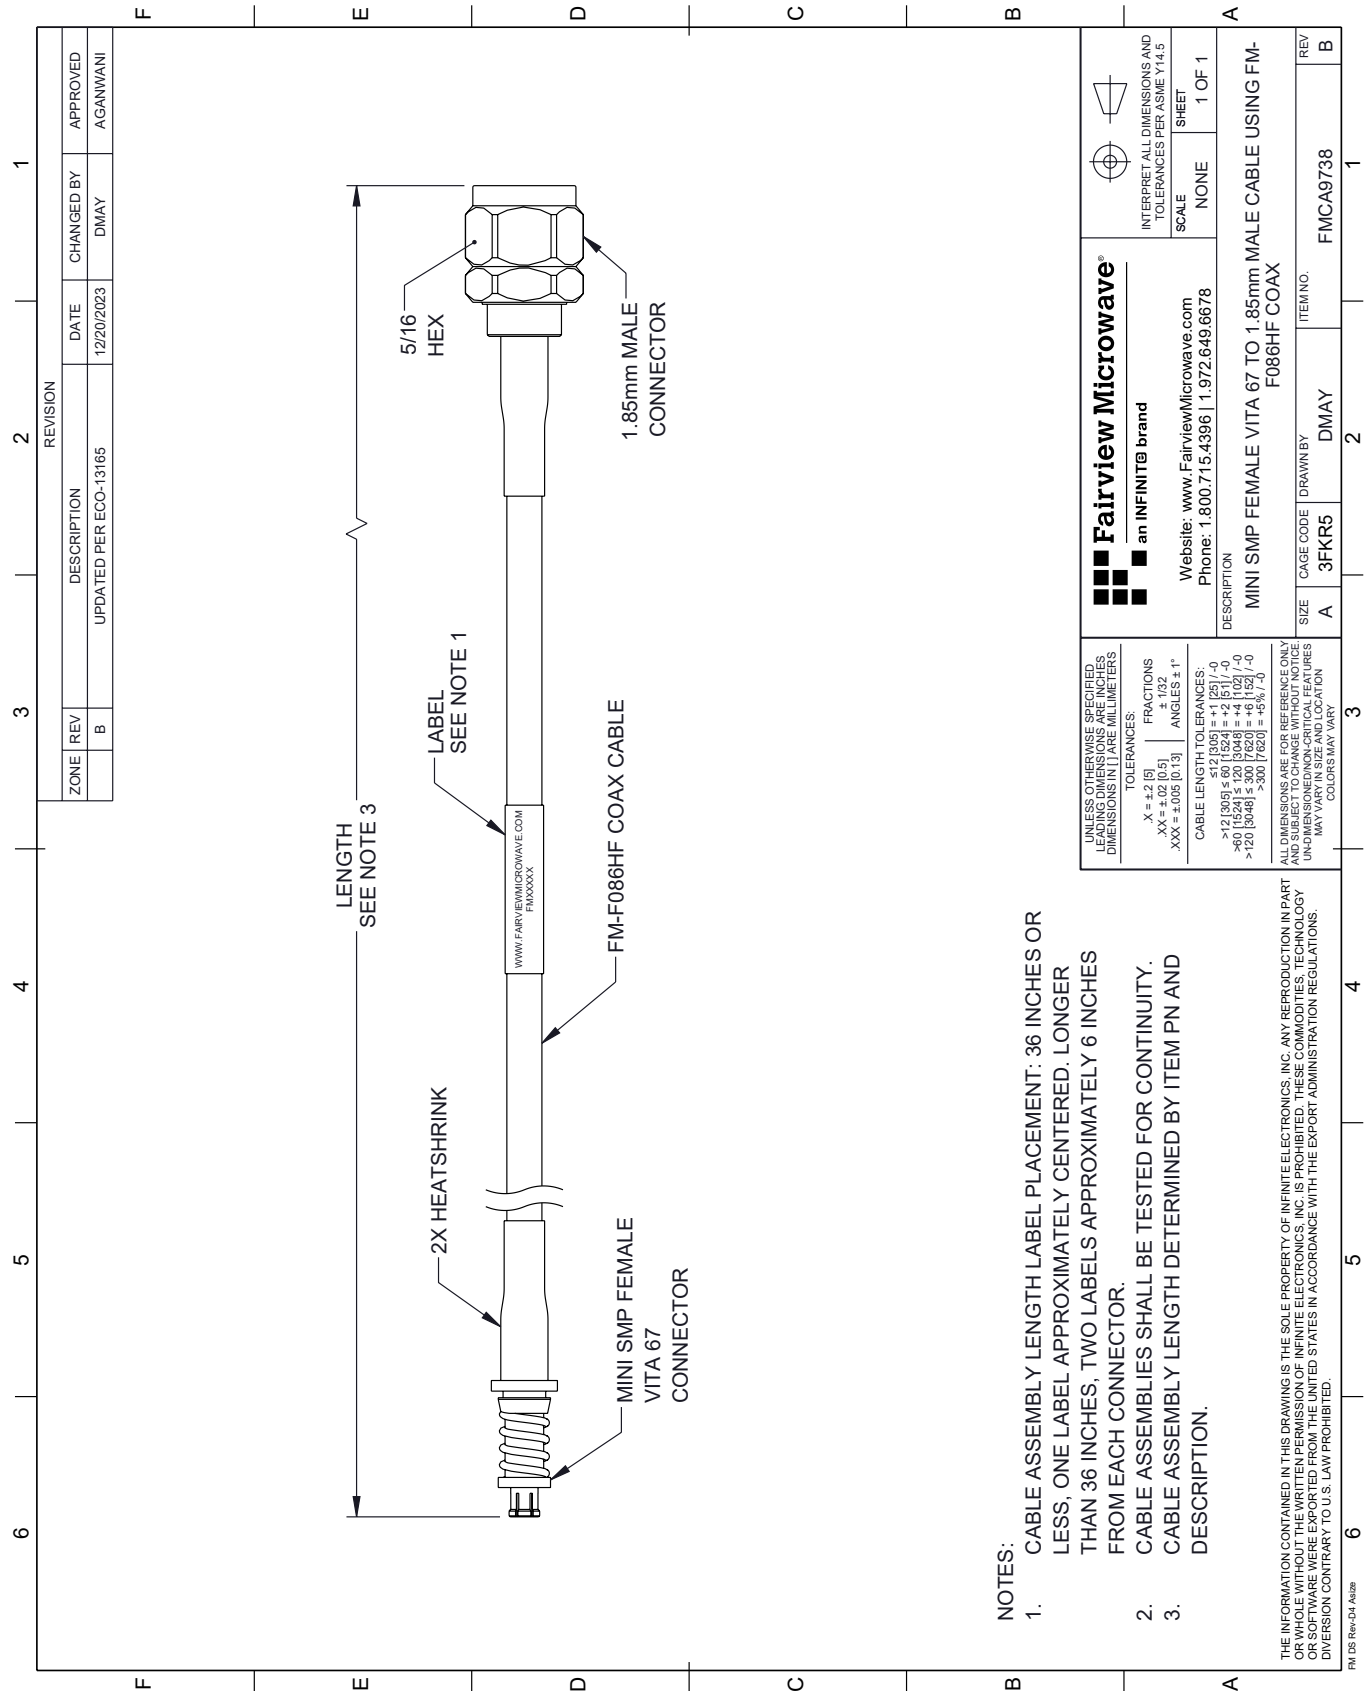

REVISION			
ZONE	REV	DESCRIPTION	DATE
	B	UPDATED PER ECO-13165	12/20/2023
			CHANGED BY
			DMAY
			APPROVED
			AGANWANI

Fairview Microwave® an INFINITI® brand		Website: www.FairviewMicrowave.com Phone: 1.800.715.4396 1.972.649.6678	
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES: X = ±.2 [5] .XX = ±.02 [0.5] .XXX = ±.005 [0.13]		SCALE NONE	
FRACTIONS ± 1/32 ANGLES ± 1°		SHEET 1 OF 1	
CABLE LENGTH TOLERANCES: >12 [305] ≤ 60 [1524] = ±.125 [-.05] / +.0 >60 [1524] ≤ 120 [3048] = ±.125 [-.05] / +.0 >120 [3048] ≤ 300 [7620] = ±.125 [-.05] / +.0 >300 [7620] = ±.125 [-.05] / +.0		DESCRIPTION MINI SMP FEMALE VITA 67 TO 1.85mm MALE CABLE USING FM-F086HF COAX	
ALL DIMENSIONS ARE FOR REFERENCE ONLY. DIMENSIONS SHALL BE TO THE CENTER OF THE CABLE UNLESS OTHERWISE SPECIFIED. DIMENSIONS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.		REV B	
SIZE A		ITEM NO. FMCA9738	
CAGE CODE 3FKR5		DRAWN BY DMAY	