

Field Replaceable SMA IQ Mixer From 15 GHz to 23 GHz With an IF Range From DC to 3.5 GHz And LO Power of +17 dBm

FMMX9004 is an I/Q double balanced millimeter-wave mixer module that operates across an RF and LO frequency range from 15 GHz to 23 GHz with an IF frequency range of DC to 3.5 GHz. The design utilizes leading edge GaAs MESFET MMIC technology that offers high linearity with reliable and consistent performance. This I/Q mixer design incorporates 2 double balanced mixer cells and a 90° hybrid and can operate as a single sideband upconverter, or an image reject mixer (IRM). For downconversion applications, an external quadrature IF hybrid can be used to select the desired sideband while rejecting image signals. Typical performance is impressive with 30 dB image rejection, 35 dB LO to RF isolation, and +25 dBm input IP3. The LO drive level is +17 dBm with typical conversion loss of 8 dB.

The drop-in package is hermetically sealed with field replaceable SMA connectors. Operating temperature range is -55°C to +85°C. And for added confidence, this rugged package assembly is designed to meet MIL-STD-883 test conditions for Hermeticity and Temperature Cycle.

This I/Q double balanced Mixer module is part of Fairview Microwave's expanding line of Mixers. These Mixers are high performance modules that offer excellent performance. The family of mixers has a variety of mixer types including Double Balanced Mixers, I/Q Double Balanced Mixer Modules, and others that cover up to Millimeter-Wave Frequencies.

Electrical Specifications TA = +25° C, IF= 100 MHz, LO = +17 dBm

Description	Min	Typ	Max	Units
RF Frequency Range	15		23	GHz
LO Frequency Range	15		23	GHz
IF Frequency Range	DC		3.5	GHz
Impedance		50		Ohms
Conversion Loss		8	10	dB
Image Rejection	30	20		dB
LO to RF Isolation	30	35		dB
LO to IF Isolation	17	22		dB
Input at P1dB		+15		dBm
Input at IP3		+25		dBm
Amplitude Balance		0.3		dB
Phase Balance		4		Degrees
RF Input Power			+20	dBm
LO Input Power		+17	+27	dBm
IF Input Power			+20	dBm



Features:

- I/Q Double Balanced Mixer Module
- IRM or Single Sideband Upconverter Functionality
- RF/LO mm-wave frequency 15 GHz to 23 GHz
- Wide IF Bandwidth DC to 3.5 GHz
- GaAs MESFET MMIC Technology
- High image rejection 30 dB
- High LO/RF Isolation 35 dB
- High input IP3 +25 dBm
- LO drive level +17 dBm
- Hermetically Sealed Module
- Mil Spec Compliant
- Field Replaceable Connectors
- -55°C to +85°C Operating Temperature

Applications:

- Electronic Warfare
- Point-to-Point Radios
- Point-to-Multipoint Radios
- VSAT
- Radar
- Space Systems
- Test Instrumentation
- Sensors
- Telecom Infrastructure
- Military End-Use

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Performance by Frequency

Harmonics of LO

LO Freq. (GHz)	nLO Spur at RF Port	
	1	2
15.5	31	51
17	31	56
18.5	32	63
20	37	73
21.5	42	72
23	55	71
LO = + 15 dBm Values in dBc below input LO level measured at RF Port.		

MxN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	-9	29	xx	xx
1	34	0	46	61	xx
2	87	65	82	62	87
3	xx	87	92	86	90
4	xx	xx	84	92	92
RF = 17.6 GHz @ -10 dBm LO = 17.5 GHz @ +15 dBm Data taken without IF hybrid All values in dBc below IF power level					

Absolute Maximum Ratings

RF / IF Input	+20 dBm
LO Drive	+ 27 dBm
Channel Temperature	150°C
Continuous Pdiss (T=85°C) (derate 5.22 mW/°C above 85°C)	340 mW
Thermal Resistance (R _{TH}) (junction to package bottom)	191.5 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-55 to +85 °C

Electrical Specification Notes:

All measurements performed as downconverter unless otherwise noted.

Mechanical Specifications

Size

Length	0.89 in [22.61 mm]
Width	0.68 in [17.27 mm]
Height	0.36 in [9.14 mm]
Weight	0.0818 lbs [37.1 g]

Configuration

Design	IQ
Connector Option	Field Replaceable
RF Connector	SMA Female
LO Connector	SMA Female
IF Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-55 to +85 deg C
Storage Range	-65 to +150 deg C

Temperature Cycle	MIL-STD-883, Method 101C, Cond B
Hermetic Seal	Gross Leak MIL-STD-883 Method 1014C1/Fine Leak MIL-STD-883, Method 1014A2, 5 x 10 ⁻⁸ atm cc

ESD Sensitive

ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.




Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- *Conversion gain data taken with external IF 90° hybrid.

Functional Block Diagram

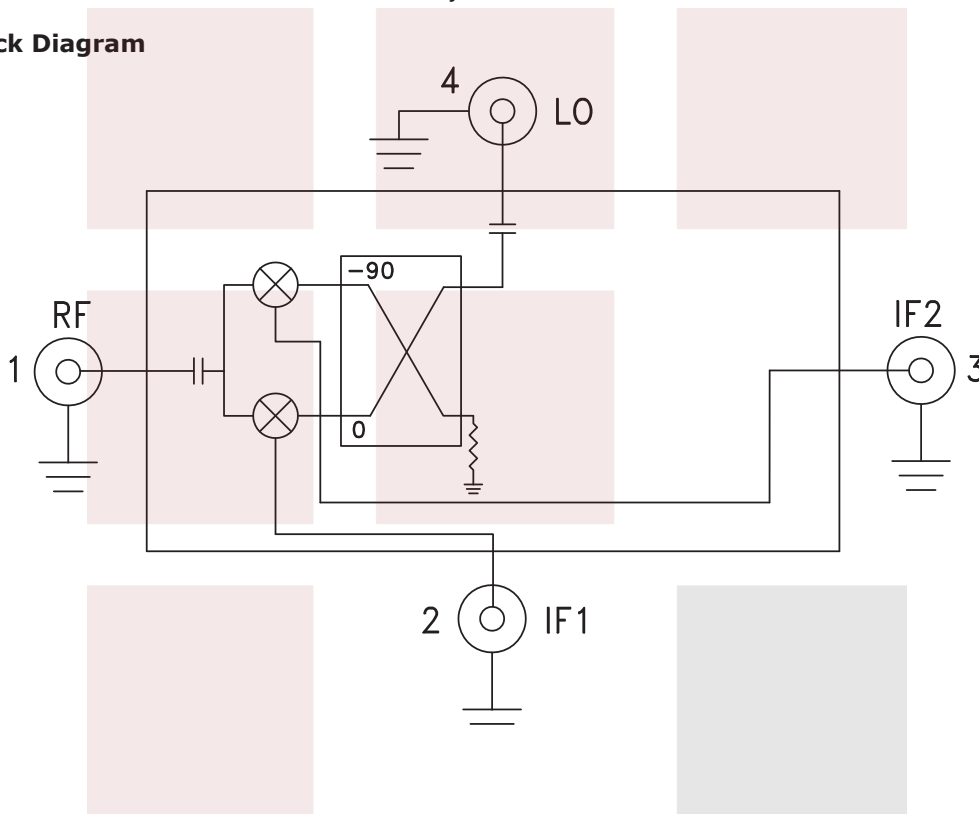

Typical Performance Data

Data taken As IRM With External IF Hybrid
Conversion Gain vs. Temperature



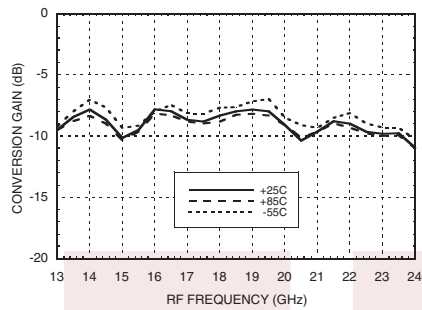



Image Rejection vs. Temperature

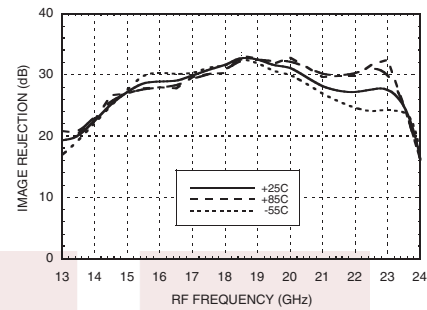


Conversion Gain vs. LO Drive

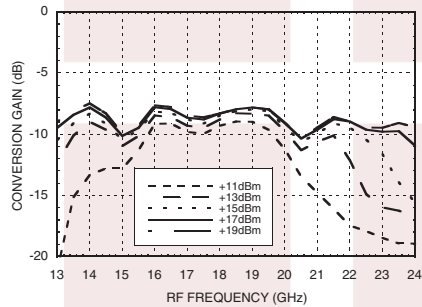


Return Loss

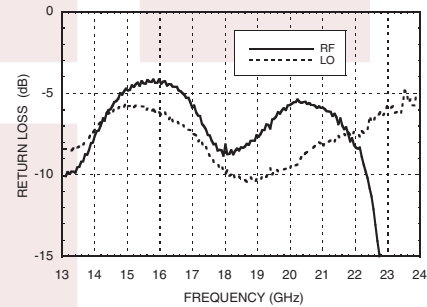


Input P1dB vs. Temperature

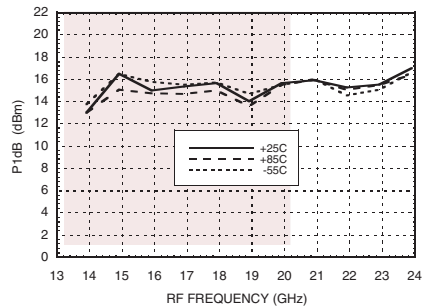


Input IP3 vs. LO Drive

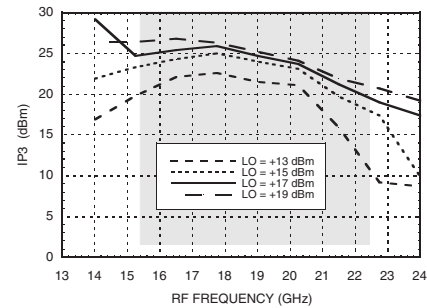


Isolations

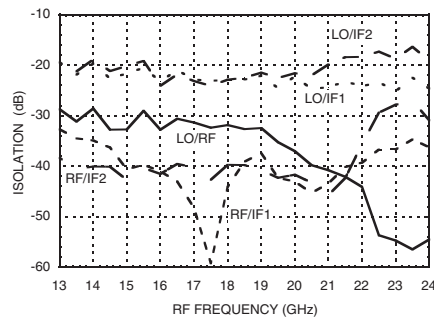


IF Bandwidth*

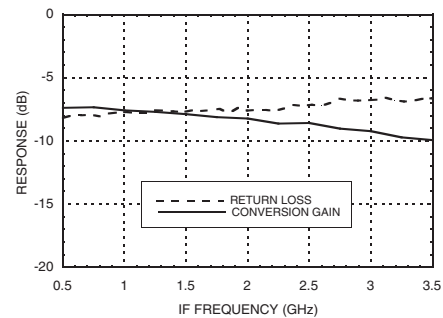


Amplitude Balance vs. LO Drive

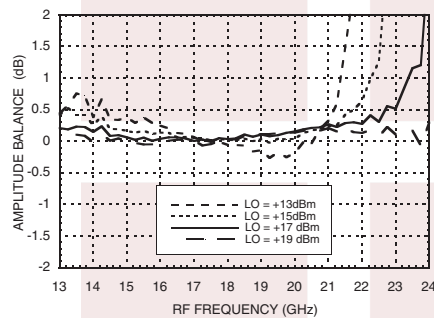


Phase Balance vs. LO Drive

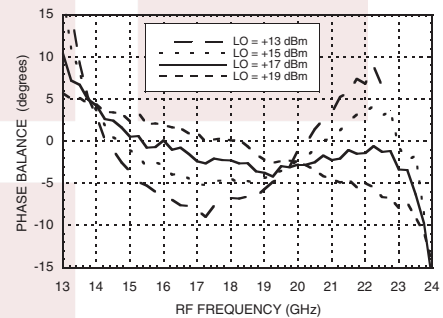

Upconverter Performance Conversion Gain vs. LO Drive*

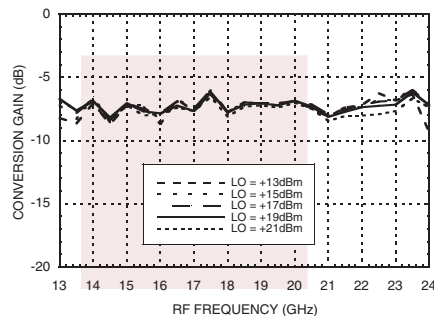

Upconverter Performance Sideband Rejection vs. LO Drive*

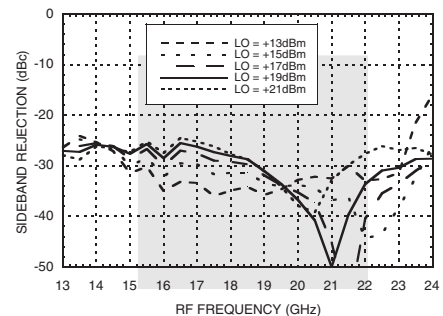


Field Replaceable SMA IQ Mixer From 15 GHz to 23 GHz With an IF Range From DC to 3.5 GHz And LO Power of +17 dBm from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Field Replaceable SMA IQ Mixer From 15 GHz to 23 GHz With an IF Range From DC to 3.5 GHz And LO Power of +17 dBm FMMX9004](https://www.fairviewmicrowave.com/field-replaceable-sma-mixer-17-dbm-fmmx9004-p.aspx)

URL: <https://www.fairviewmicrowave.com/field-replaceable-sma-mixer-17-dbm-fmmx9004-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

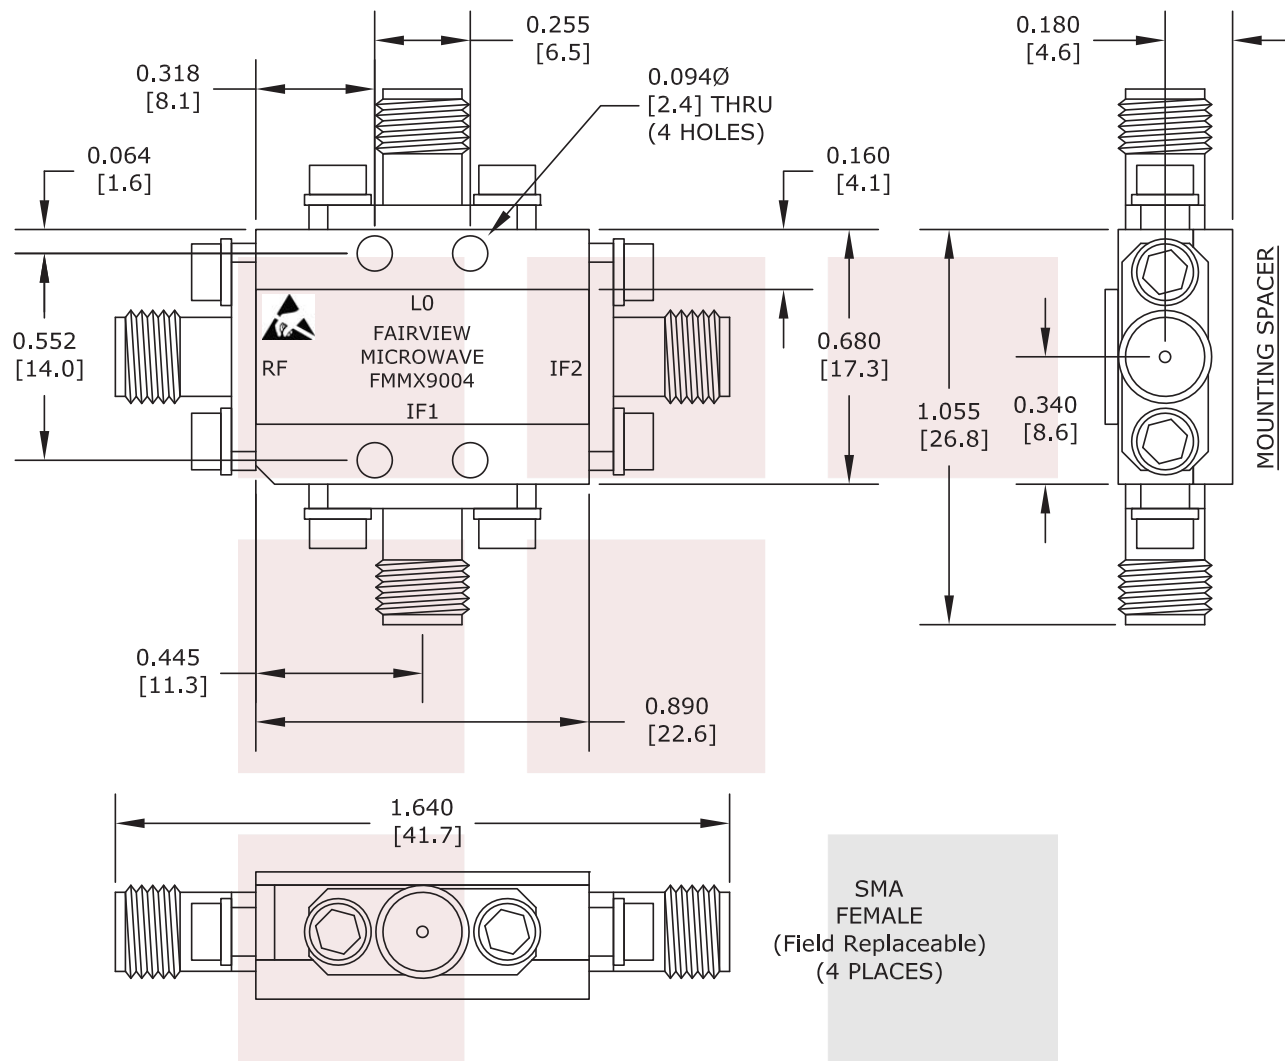

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE

Field Replaceable SMA IQ Mixer From 15 GHz to 23 GHz With an IF Range From DC to 3.5 GHz And LO Power of +17 dBm

DWG NO

FMMX9004

CAGE CODE

3FKR5

CAD FILE

050316

SHEET

SCALE

N/A

SIZE

A 2233