


SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt (+43 dBm) with Heatsink

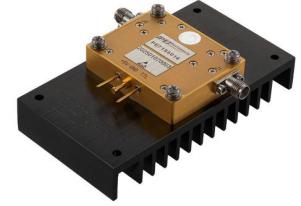

FMSW5014

Features

- Reflective SPST High Power PIN Diode Switch
- Reflective Design
- Frequency Range: 1 GHz to 18 GHz
- Insertion Loss: 2.8 dB max
- Isolation: 26 dB min
- VSWR: 2:1 max
- Maximum RF Input Power: 20 Watt
- Input IP3: +50 dBm typ
- Switching Speed: 200 nsec
- TTL Compatible Driver Circuitry
- 50 Ohm Design
- SMA Female Connectors
- Compact Package Design withstands up to 95% Relative Humidity
- -40°C to +85°C Operating Temperature

Applications

- Aerospace & Defense
- Microwave Radio
- Military & Commercial Communication
- VSAT
- SATCOM
- Test & Measurement
- Wireless Infrastructure
- Fiber Optics

Description

The FMSW5014 is a single pole single throw (SPST) PIN diode switch that operates across a wide frequency band from 1 GHz to 18 GHz. The 50 ohm reflective design supports TTL compatible driver circuitry for accurate logic control. Impressive typical performance includes 2.8 dB insertion loss max, 26 dB isolation min, and 200 nsec switching speed. The switch requires a bias voltage of +5Vdc, and has maximum input power handling of up to 20 W. The rugged and compact package supports field replaceable SMA female RF connectors and solder terminal pins for DC bias voltage and TTL control. The switch is designed for high reliability with a wide operational temperature range of -40°C to +85°C, and meets a series of environmental test conditions including Altitude, Vibration, Humidity, and Shock.


Electrical Specifications

TTL Control Logic

Off/Isolation: "0" 0 to 0.8 V
On/Low Loss: "1" 2.8 to 5 V

Description	Min	Typ	Max	Units
Frequency Range	1		18	GHz
Impedance		50		Ohms
VSWR		1.5:1	2:01	
Insertion Loss		1.8	2.8	dB
IL Temperature Coefficient		0.003		
Switching Time			200	ns
Input IP3		50		dBm
Input Power (CW) 10% duty cycle, 10us pulses			54	dBm
DC Power Dissipation		0.9		Watt
Positive Operating Voltage		5		Vdc
Current @ 5 Vdc		100		mA
Operating Temperature	-40		85	deg C

SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt (+43 dBm) with Heatsink

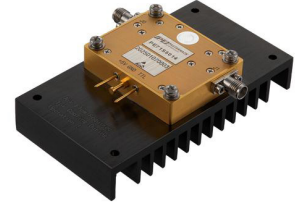

FMSW5014

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	1 to 13	13 to 18				GHz
Insertion Loss, Max	2.2	2.8				dB
Insertion Loss, Typ	1.8	2				dB
Isolation, Min	26	26				dB
Isolation, Typ	35	30				dB

Electrical Specification Notes:

1. If the device operates in high power state, recommend keeping case temperature lower than 60 degrees C.
2. Cold Switching: Before changing any TTL signal(s), the RF input power must be blanked or the switch could be damaged.

Absolute Maximum Rating

Parameter	Rating
Biasing	+5V±10%
TTL Control Voltage	0~0.8V/2.8~5V



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Mechanical Specifications

Size

Length	1.77 in [44.96 mm]
Width	1.46 in [37.08 mm]
Height	0.39 in [9.91 mm]
Weight	0.05 lbs [22.68 g]
Body Material and Plating	Copper, Gold

Configuration

Design	Reflective, SPST
RF Input/Output Connector	SMA Female
Band Type	Wideband


Environmental Specifications

Temperature

Operating Range	-40 to 85 deg C
Storage Range	-50 to -105 deg C
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)? 60,000 ft. 1.0psi min
Hermetic Seal	Optional

SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt (+43 dBm) with Heatsink

FMSW5014




Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

Typical Performance Data


Insertion Loss @+25°C

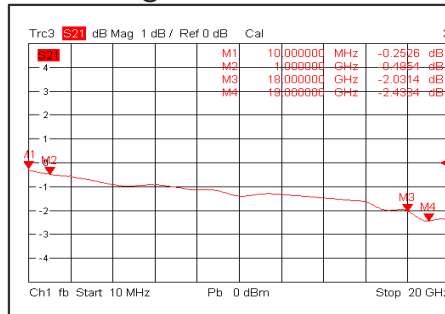


Input VSWR @+25°C

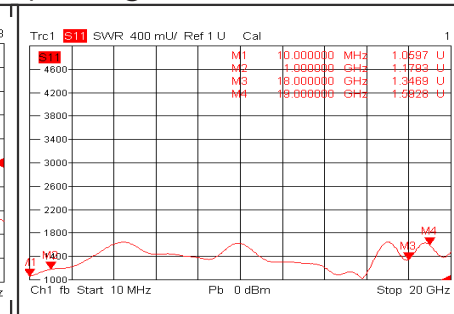


Output VSWR @+25°C

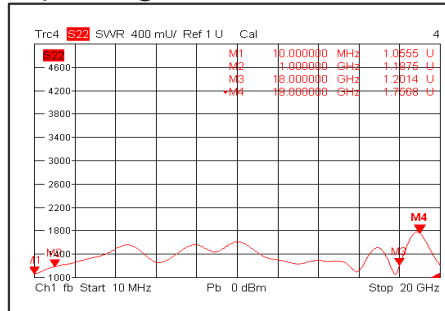

Isolation @+25°C

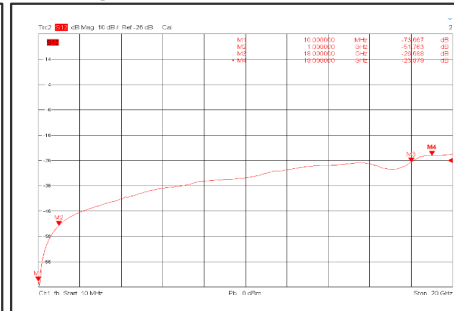


SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt (+43 dBm) with Heatsink




FMSW5014


Insertion Loss @-40°C

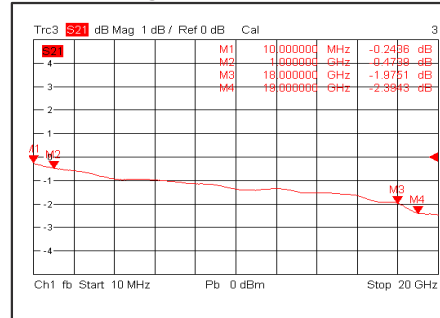


Input VSWR @-40°C

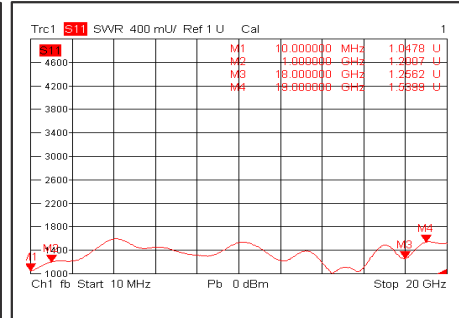


Output VSWR @-40°C

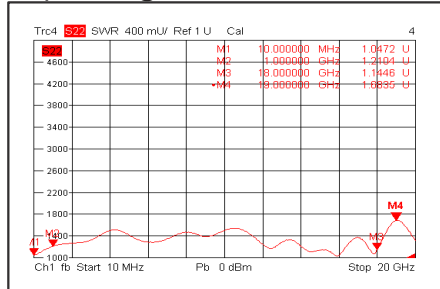

Isolation @-40°C

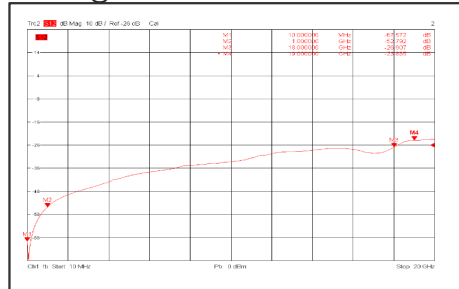


SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt (+43 dBm) with Heatsink

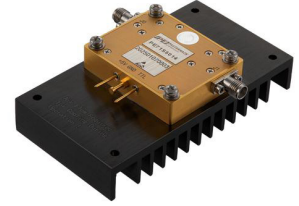


FMSW5014


Insertion Loss @+85°C

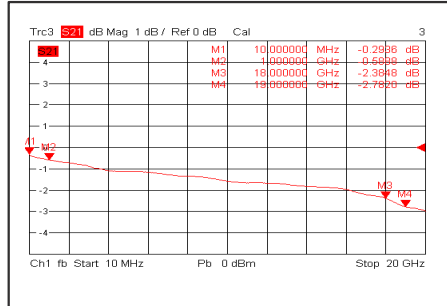


Input VSWR @+85°C

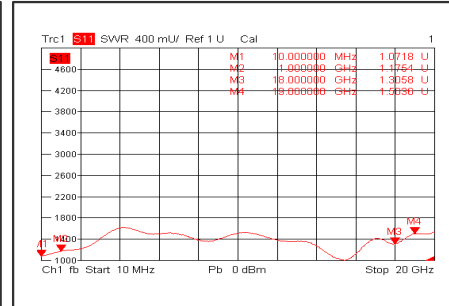

Output VSWR @+85°C

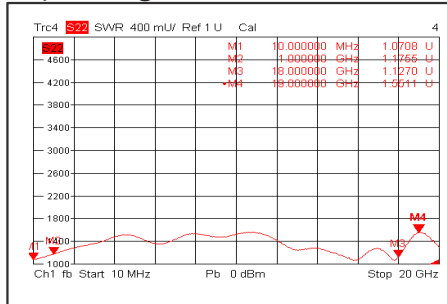


Isolation @+85°C

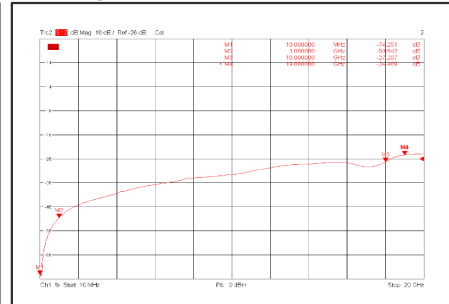


SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt (+43 dBm) with Heatsink


FMSW5014




Insertion Loss vs. Temperature

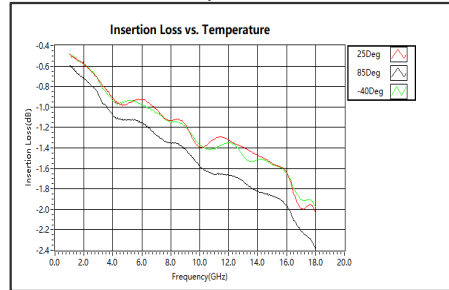


Insertion Loss Temperature Coefficient

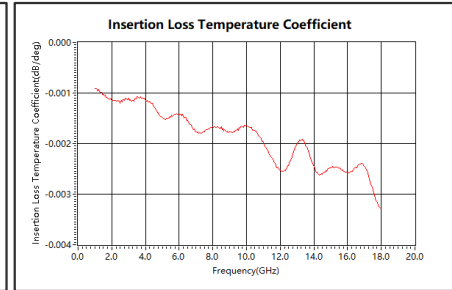


Input Power@P0.3dB

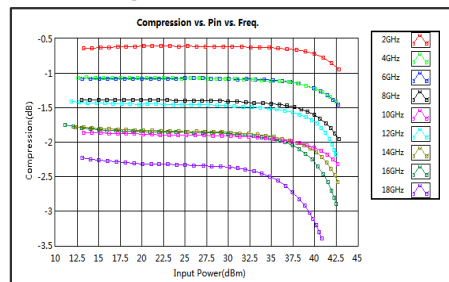

IIP3

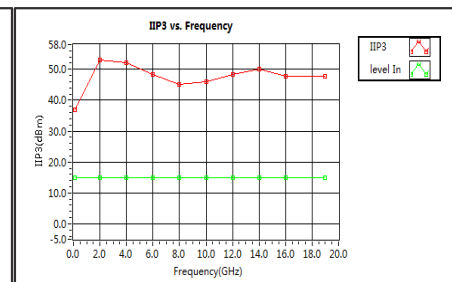

SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt (+43 dBm) with Heatsink



FMSW5014

SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt (+43 dBm) with Heatsink from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA Reflective SPST PIN Diode Switch From 1 GHz to 18 GHz Rated at 20 Watt \(+43 dBm\) with Heatsink FMSW5014](https://www.fairviewmicrowave.com/sma-spst-pin-diode-switch-18-ghz-54-watts-fmsw5014-p.aspx)

URL: <https://www.fairviewmicrowave.com/sma-spst-pin-diode-switch-18-ghz-54-watts-fmsw5014-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

