

Times Microwave LMR-195-FR Low Loss Flexible Coax Cable Black FRPE Jacket
Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		5.8	GHz
Impedance		50		Ohms
Velocity of Propagation		76		%
Time Delay		1.27 [4.17]		ns/ft [ns/m]
Shielding Effectiveness	90			dB
DWV (DC)			1,000	Vdc
Jacket Spark			3,000	Vrms
Inner Conductor DC Resist.			7.6	Ohms/1000ft
Outer Conductor DC Resist.			4.9	Ohms/1000ft
Nominal Capacitance		25.4		pF/ft
		[83.33]		[pF/m]
Nominal Inductance		0.064		uH/ft
		[0.21]		[uH/m]
Input Power (Peak)			2.5	kWatts

Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	50	150	220	450	900	MHz
Attenuation, Typ	2.5	4.4	5.4	7.8	11.1	dB/100ft
	8.2	14.44	17.72	25.59	36.42	dB/100m
Power In (CW), Max	680	390	320	220	160	Watts

Description	F6	F7	F8	F9	F10	Units
Frequency	1.5	1.8	2	2.5	5.8	GHz
Attenuation, Typ	14.5	16	16.9	19	29.9	dB/100ft
	47.57	52.49	55.45	62.34	98.1	dB/100m
Power In (CW), Max	120	110	100	90	60	Watts

Mechanical Specifications

Diameter	0.195 in [4.95 mm]
Weight	0.028 lbs/ft [0.04 kg/m]
Min. Bend Radius (Installation)	0.5 in [12.7 mm]
Min. Bend Radius (Repeated)	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Tensile Strength	40 lbs [18.14 kg]
Flat Plate Crush	15 lbs/in [0.27 kg/mm]

Construction Specifications

Description	Material and Plating	Diameter
-------------	----------------------	----------


Configuration:

- Low Loss, Fire Rated Flexible Cable
- 2 Shield(s)

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Inner Conductor	Copper, 1 Strands	0.037 in [0.94 mm]
Conductor Type	Solid	
Dielectric	PE	0.11 in [2.79 mm]
First Shield	Aluminum Tape	[]
Second Shield	Tinned Copper Braid	[]
Jacket	FRPE, Black	0.195 in [4.95 mm]

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Storage Range

-70 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


Times Microwave LMR-195-FR Low Loss Flexible Coax Cable Black FRPE Jacket from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [Times Microwave LMR-195-FR Low Loss Flexible Coax Cable Black FRPE Jacket LMR-195-FR-FT](#)

URL: <https://www.fairviewmicrowave.com/lmr195fr-low-loss-flexible-coax-cable-frpe-jacket-lmr-195-fr-ft-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/24/2022	AGANWANI

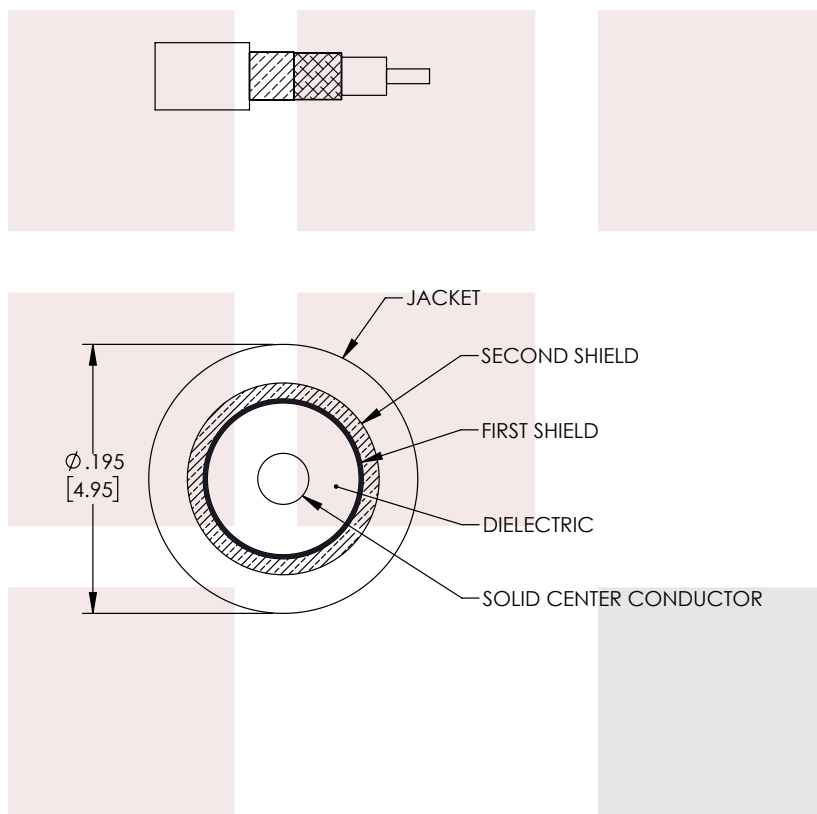

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE

Times Microwave LMR-195-FR Low Loss Flexible Coax Cable Black FRPE Jacket

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

CABLE LENGTH (L) TOLERANCES:

.X = ±.2	[.508]	FRACTIONS
.XX = ±.02	[.51]	± 1/32
.XXX = ±.005	[.13]	ANGLES ± 1°

$$\begin{aligned} L \leq 12 \text{ [305]} &= +1 \text{ [25]} / -0 \\ 12 \text{ [305]} < L \leq 60 \text{ [1524]} &= +2 \text{ [51]} / -0 \\ 60 \text{ [1524]} < L \leq 120 \text{ [3048]} &= +4 \text{ [102]} / -0 \\ 120 \text{ [3048]} < L \leq 300 \text{ [7620]} &= +6 \text{ [152]} / -0 \\ 300 \text{ [7620]} < L &= +5\%L / -0 \end{aligned}$$

THIRD-ANGLE PROJECTION



THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
FAIRVIEW MICROWAVE CORPORATION.
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE	N/A
-------	-----

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SIZE	A
------	---

CAGE CODE	3FK
-----------	-----

DRAWN BY
DZINN

ITEM NO.	L
----------	---

REV	A
-----	---