

## WR-137 Seamless Flexible Waveguide Using CPR-137G Flange With a 5.85 GHz to 8.2 GHz Frequency Range

The SMW137SF006-12 is part of Fairview Microwave's family of flexible, seamless waveguides which operates in the 5.85 to 8.20 GHz range. The waveguide body is made of silver plated brass. It can be bent in both the E and H planes without impairing VSWR or attenuation. The waveguide is covered by a neoprene jacket which protects the waveguide and provides mechanical support.

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	5.85		8.2	GHz
VSWR		1.07:1		
Insertion Loss		0.06		dB

### Mechanical Specifications

Waveguide Size	WR-137
Waveguide Design	Seamless
Section Length	12 in [304.8 mm]
E-Plane Minimum Bend Radius, One Time	1.18 in [29.97 mm]
H-Plane Minimum Bend Radius, One Time	1.97 in [50.04 mm]
Maximum Offset Rotation, One Time	30 degrees/ft

Description	Flange 1	Waveguide	Flange 2
Type	CPR-137G	WR-137	CPR-137G
Designation	None		None
Material	Brass	Copper	Brass
Plating		Silver	
Color	Gold	Black	Gold

### Compliance Certifications (visit [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com) for current document)

RoHS Compliant	Yes
REACH Compliant	12/17/2015

### Plotted and Other Data

- Notes:
- Notes, Plotted Data



### Features:


- WR-137 waveguide
- Flexes in both the E and H plane
- 5.85 GHz to 8.20 GHz Frequency Range
- Brass flanges with a silver plated brass body
- Neoprene sleeve provides added protection and mechanical support

### Applications:

- Allows expansion/contraction due to thermal issues.
- Test Benches
- Microwave Radio
- Eliminates installation problems caused by misalignment.
- Pressurized waveguide systems
- Provides vibration isolation

Fairview Microwave  
1130 Junction Dr. #100  
Allen, TX 75013  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

### Typical Performance Data

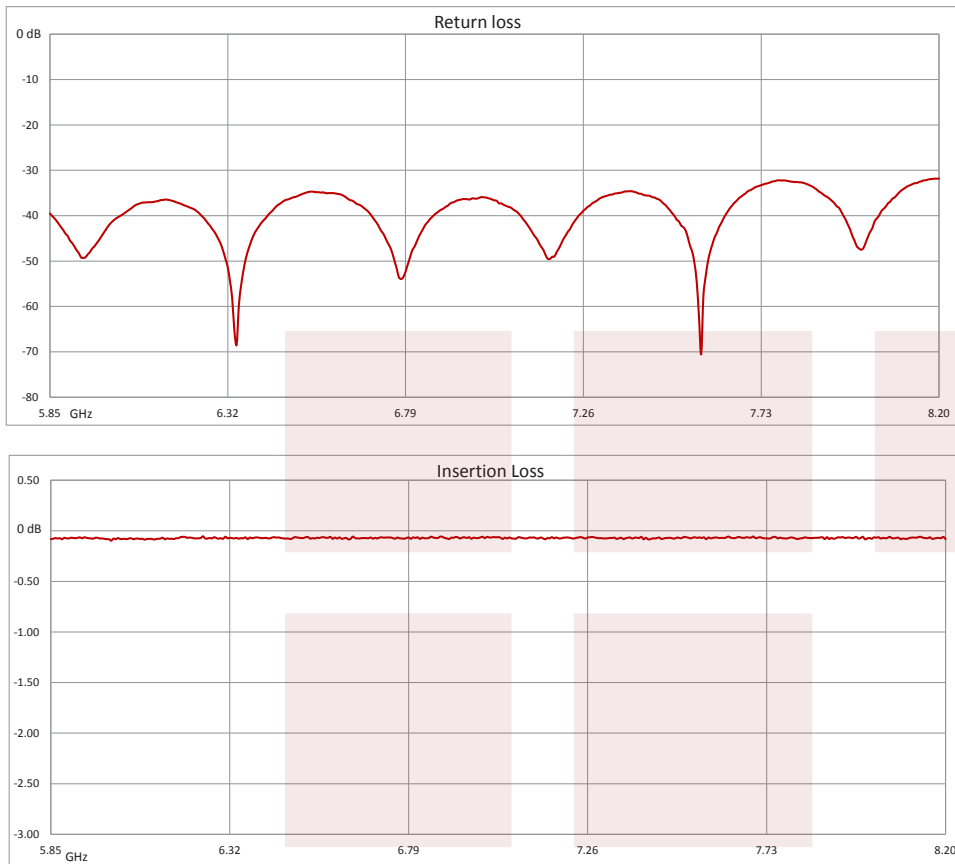


WR-137 Seamless Flexible Waveguide Using CPR-137G Flange With a 5.85 GHz to 8.2 GHz Frequency Range from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-137 Seamless Flexible Waveguide Using CPR-137G Flange With a 5.85 GHz to 8.2 GHz Frequency Range SMW137SF006-12](https://www.fairviewmicrowave.com/wr-137-seamless-flexible-waveguide-cpr-137g-5.85-8.2-ghz-smw137sf006-12-p.aspx)

URL: <https://www.fairviewmicrowave.com/wr-137-seamless-flexible-waveguide-cpr-137g-5.85-8.2-ghz-smw137sf006-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

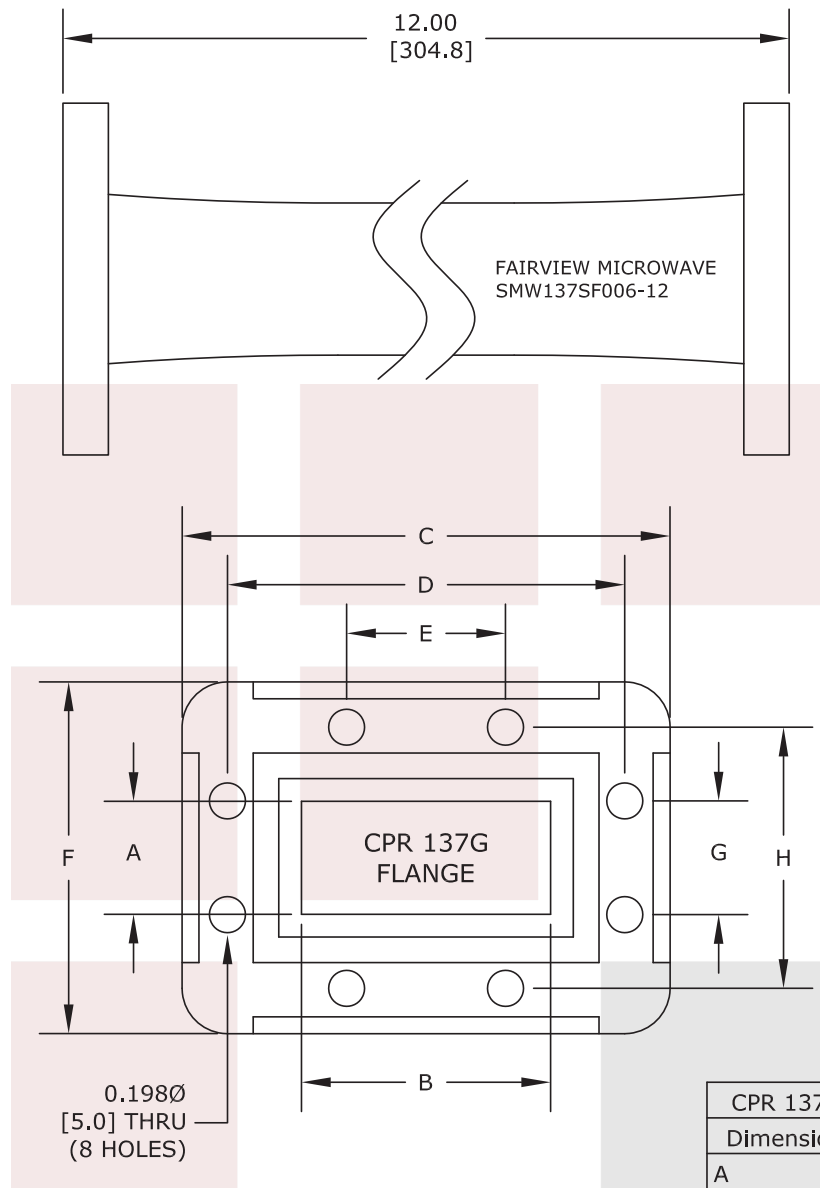

CPR 137G		
Dimension	Inches	mm
A	0.622	15.80
B	1.372	34.85
C	2.687	68.25
D	2.188	55.58
E	0.875	22.23
F	1.937	49.20
G	0.626	15.90
H	1.438	36.53

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE WR-137 Seamless Flexible Waveguide Using CPR-137G Flange With a 5.85 GHz to 8.2 GHz Frequency Range		DWG NO SMW137SF006-12		CAGE CODE 3FKR5	
CAD FILE	101315	SHEET	SCALE	N/A	SIZE A 2233