

# SPA-060-45-25-SMA **DATA SHEET**

## 50 dB Gain High Power High Gain Amplifier at 25 Watt Psat Operating From 2 GHz to 6 GHz with **SMA**

SPA-060-45-25-SMA is a 25W high gain coaxial power amplifier operating in the 2 to 6 GHz frequency range. The amplifier offers 44 dBm typical of saturated power and 50 dB minimum small signal gain with gain variation over temperature of -0.05 dB/°C typical. This excellent technical performance is achieved through the use of advanced GaN devices. The amplifier requires typically a +28V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, DC On/Off TTL Logic control, current monitoring and over temp shutdown at +90°C for added reliability. The amplifier operates over the temperature range of -40°C and +85°C.

## **Electrical Specifications** (TA = +25°C, DC Voltage = 28Volts, DC Current = 3,000 mA)

Description	Min		Тур	Max	Unit		
Frequency Range	2			6	GHz		
Small Signal Gain	50				dB		
Gain Flatness			±1.25		dB		
Psat	+43		+44		dBm		
Harmonics			-15		dBc		
Noise Figure				7	dB		
Spurious			-70		dBc		
Input VSWR			2:1				
Output VSWR			2:1				
TTL Control	"1": Off, "0": On (Blanking), Enable: 0V, Disable: 5V						
Operating DC Voltage			28		Volts		
Operating DC Current			3,000		mA		
Operating Temperature Rai	nge -40			+85	°C		

#### **Mechanical Specifications**

Size

2.5 in [63.5 mm] Lenath Width 2.75 in [69.85 mm] Height 0.45 in [11.43 mm]

Input Connector SMA Female SMA Female **Output Connector** 

## **Environmental Specifications**

### **Temperature**

Altitude

Salt Fog

Operating Range -40 to +85 deg C Storage Range -54 to +85 deg C

Humidity IAW MIL-STD-810F, up to 95%%

Non-Condensing

Shock IAW MIL-STD-202G method 214,

condition C

IAW MIL-STD-810F, Method 514.5, Vibration

up to 30,000 ft feet Above Sea Level

5%, +35°C 96 hrs IAW MIL-STD-

810G method



#### Features:

- 2 GHz to 6 GHz Frequency Range
- · Psat 44 dBm typ
- Small Signal Gain: 50 dB min
- Gain Flatness +/-1.25 dB typical
- 50 Ohms Input and Output Matched
- · Unconditionally Stable
- Regulated Supply & Bias Sequencing
- · Hermetically Sealed Module
- · Current Monitoring
- Mismatch Handling 5.0:1 max
- · Over Temp Shutdown

## Applications:

- · Military Radio
- Communication Systems
- High Gain Driver Power Amplifier
- High Gain Output Power Amplifier

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com



**Fungus** 


IAW MIL-STD-810G method 508.6

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

#### **Plotted and Other Data**

#### Notes:

- Values at 25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.

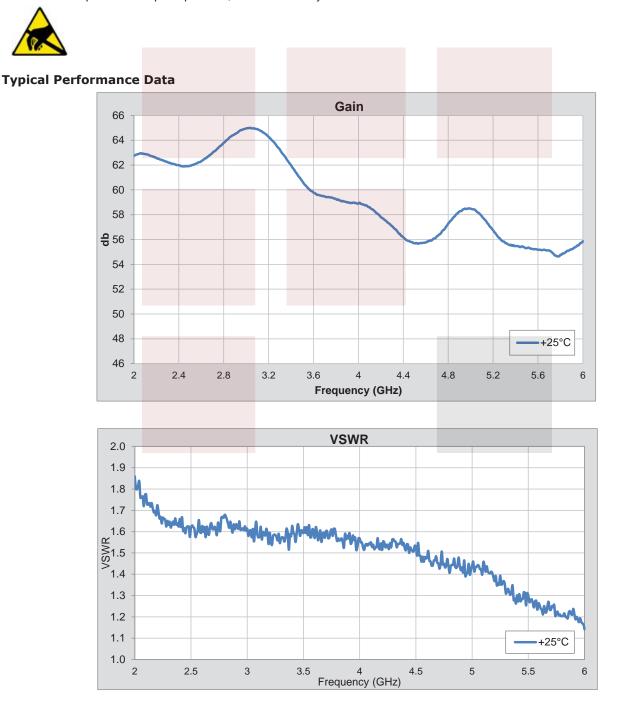


1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2015

REV 1.1 Page 2 of 4



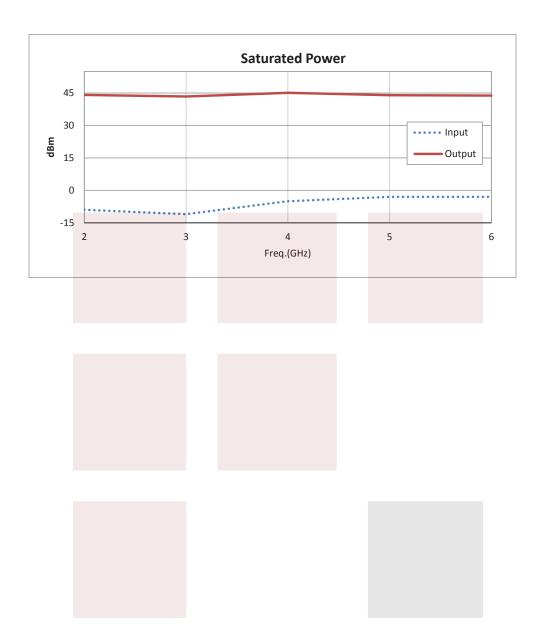

50 dB Gain High Power High Gain Amplifier at 25 Watt Psat Operating From 2 GHz to 6 GHz with SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 50 dB Gain High Power High Gain Amplifier at 25 Watt Psat Operating From 2 GHz to 6 GHz with SMA SPA-060-45-25-SMA


URL: http://www.fairviewmicrowave.com/50db-high-power-high-gain-amplifier-25watt-spa-060-45-25-sma-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689



PIN	DESC.	PIN	DESC.	PIN	DESC.
1	+28V	6	N/C	11	GND
2	+28V	7	OVER-CURRENT BIT	12	GND
3	GND	8	BLANKING TTL	13	N/C
4	GND	9	+28V	14	N/C
5	N/C	10	+28V	15	OVER-TEMP BIT

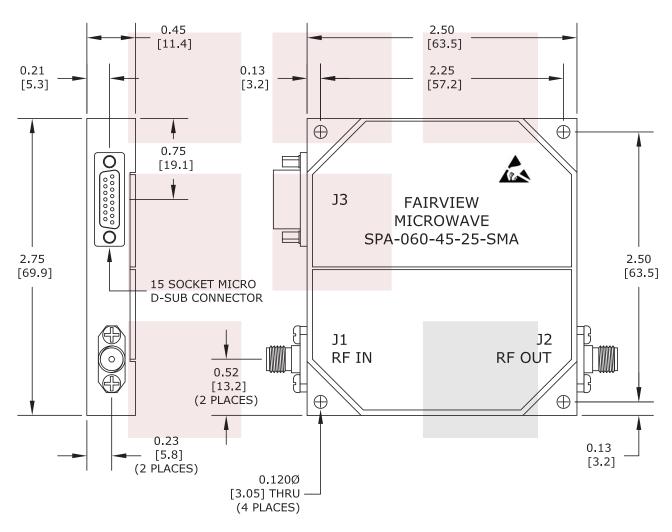

NOTE: HEAT SINK REQUIRED FOR PROPER OPERATION, UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				IY TIME.		
50 dB Gain High Power High Gain Amplifier at 25 Watt	DWG NO SPA-060-45-25-SMA			CAGE CODE 3FKR5			
Psat Operating From 2 GHz to 6 GHz with SMA	CAD FILE	020415	SHEET	SCAL	E N/A	SIZE A	150