an INFINIT[®] brand

FMAD1273 DATA SHEET

N Male to 2.2-5 Female Adapter, Low PIM

Type N male to 2.2-5 female adapter part number FMAD1273 from Fairview Microwave is in-stock and ships same day. This Fairview type N to 2.2-5 adapter has a male to female gender configuration in a low PIM design. FMAD1273 type N male to 2.2-5 female adapter operates to 8 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum and passive intermodulation of -160 dBc typical.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Мах	Units
Frequency Range	DC		8	GHz
VSWR			1.25:1	
Passive Intermodulation		-160		dBc
DWV (AC)			750	Vrms

Mechanical Specifications

Size Length Width Weight		1.390 in [35.3 mm] 0.85 in [21.59 mm] 0.09 lbs [40.82 g]
Description	Connector 1	Connector 2
Туре	N Male	2.2-5 Female
Polarity	Standard	Standard

Material Specifications

N Male	2.2-5 Female	
	2.2-5 Female	
Beryllium Copper		
Silver		
PTFE	PTFE	
	Bronze	
	Silver	
Brass	Brass	
Tri-Metal	Tri-Metal	
Brass		
Tri-Metal		
	Silver PTFE Brass Tri-Metal Brass	



Configuration:

- N Male Connector 1
- 2.2-5 Female Connector 2
- 50 Ohm
- Low PIM Design
- Straight Body Geometry

Features:

- VSWR of 1.25:1 max up to 8 GHz
- Typical PIM levels of -160 dBc
- VSWR of 1.25:1 max up to 8 GHz
- PIM levels better than -160 dBc
- Corrosion Resistant Tri-Metal finish

Applications:

- Enables Between Series
 Connections
- General Purpose Test
- Low PIM Applications
- Enables Between Series
 Connections
- General Purpose Test
- Low PIM Applications
- Mobile Communications Systems
- Base Stations
- Distributed Antenna Systems
- Small Cells
- Feeder Cables

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature Operating Range

-40 to +155 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

N Male to 2.2-5 Female Adapter, Low PIM from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: N Male to 2.2-5 Female Adapter, Low PIM FMAD1273


URL: https://www.fairviewmicrowave.com/low-pim-n-male-2.2-5-female-adapter-fmad1273-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





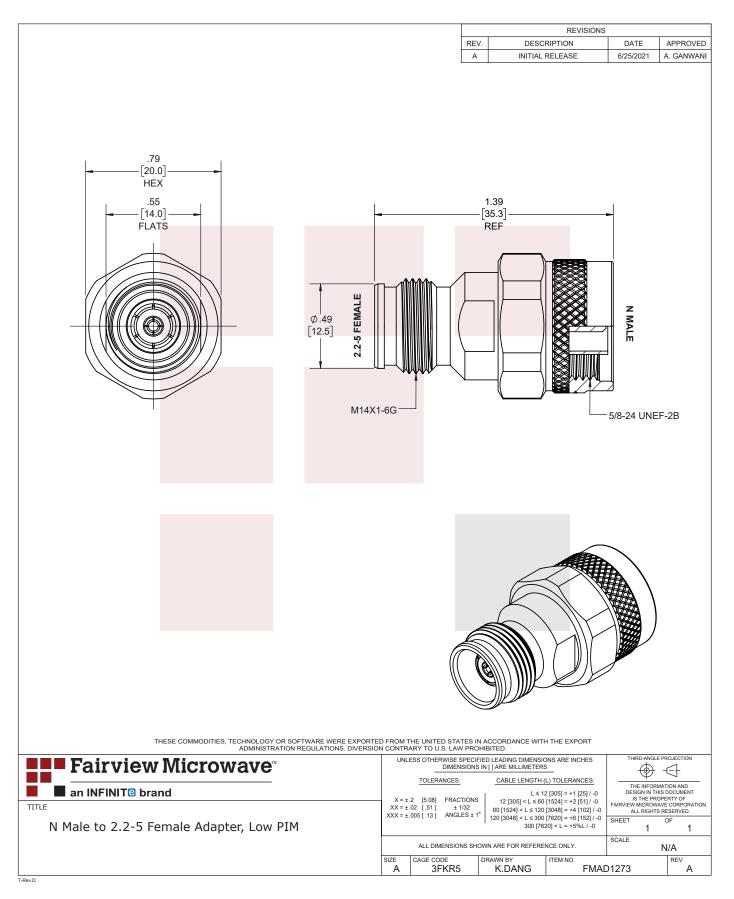

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689