

4 dB Fixed Attenuator, 4.3-10 Male (Plug) to 4.3-10 Female (Jack) Up to 6 GHz Rated to 2 Watts, 1.3:1 VSWR

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The FMAT7451-4 is a 4 dB Fixed Attenuator that operates from DC to 6 GHz and is rated to 2 Watts. The versatile coaxial package uses 4.3-10 male to 4.3-10 female connectors and is also RoHS compliant.

Electrical S	Specifications
--------------	----------------

Contact Material & Plating

Body Material & Plating

Description	Min	Тур	Max	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohm
Nominal Attenuation		4		dB
Attenuation Accuracy			±0.5	dB
VSWR			1.3:1	
Input Power, CW			2	Watt
Input Power, Peak			500	Watts
5µs PW, 0.4% duty cy	cle			
Length Width/Diameter Height			18.01 mm] 18.01 mm]	
Weight Body Material and Plati	na	0.143 lbs [64.86 g] Brass, Nickel		
Douy Material and Plat	ng	DIASS, NICI	KEI	
Configuration				
Design		Fixed		
Package Style		Connectorized		
Connectors				
Connectors Description	С	onnector 1	Conne	ctor 2
	_	onnector 1 4.3-10 Male	Conne 4.3-10 F	

Brass, Gold

Brass, Nickel

Beryllium Copper, Gold

Brass, Nickel



FMAT7451-4 DATA SHEET

Features:

- DC to 6 GHz Frequency Range
- 4.3-10 Connectorized Design
- Attenuation 4 dB ±0.5 dB
- Max Power 2 Watts (CW)
- Typical VSWR of 1.3:1

Applications:

- Instrumentation
- Precision Measurements
- Prototyping and Characterization
- Production Systems

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature	
Operating Range	-55 to +125 deg C
Storage Range	-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:

4 dB Fixed Attenuator, 4.3-10 Male (Plug) to 4.3-10 Female (Jack) Up to 6 GHz Rated to 2 Watts, 1.3:1 VSWR from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 4 dB Fixed Attenuator, 4.3-10 Male (Plug) to 4.3-10 Female (Jack) Up to 6 GHz Rated to 2 Watts, 1.3:1 VSWR FMAT7451-4

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.




301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Fairview Microwave



an INFINIT[©] brand

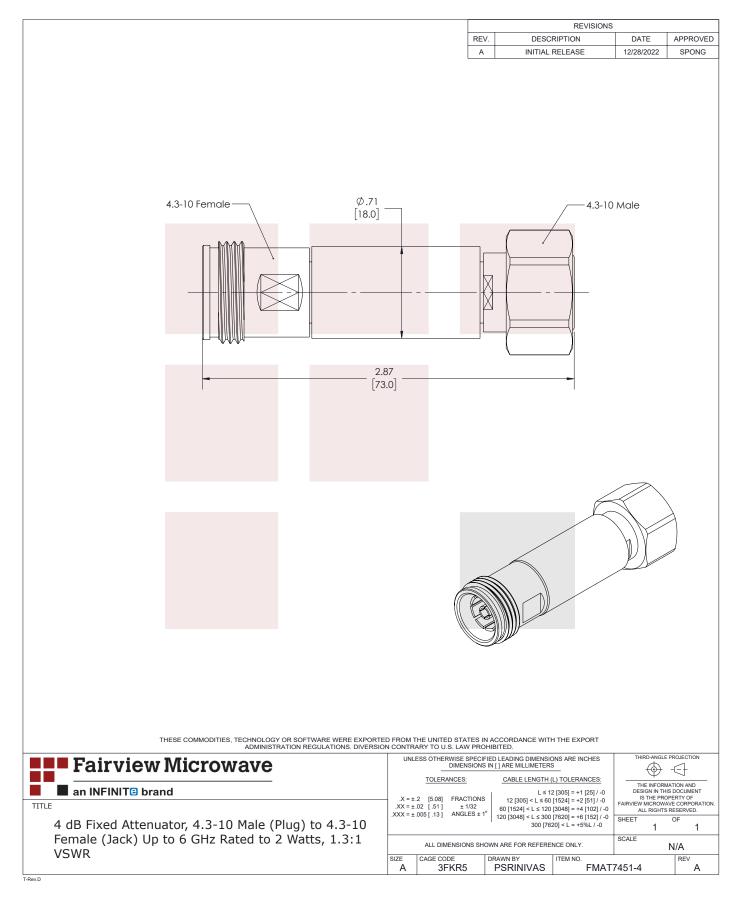

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689