

## Low Loss SMA Male to N Male Cable LMR-400-UF Coax with Times Microwave Components



### FMC00254

#### Configuration

- Connector 1: SMA Male
- Connector 2: N Male
- Cable Type: LMR-400-UF
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

The SMA male to type N male cable using LMR-400-UF coax, part number FMC00254, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400-UF coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00254 SMA male to type N male cable assembly operates to 6 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.07 [3.51]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)			335	Vrms

## Low Loss SMA Male to N Male Cable LMR-400-UF Coax with Times Microwave Components

**FMC00254**



### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			8,000	Vrms

### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
FMC00254	Custom Lengths Available	Insertion Loss (Typ.)	0.023	0.035	0.05	0.081	0.112	dB/ft	
			0.08	0.12	0.17	0.27	0.37	dB/m	
FMC00254-12	12 inch	Insertion Loss (Typ.)	0.23	0.24	0.25	0.29	0.32	dB	0.239
FMC00254-24	24 inch	Insertion Loss (Typ.)	0.25	0.27	0.3	0.37	0.43	dB	0.326
FMC00254-36	36 inch	Insertion Loss (Typ.)	0.27	0.31	0.35	0.45	0.54	dB	0.413
FMC00254-60	60 inch	Insertion Loss (Typ.)	0.32	0.38	0.45	0.61	0.76	dB	0.587
FMC00254-300	300 inch	Insertion Loss (Typ.)	0.78	1.08	1.45	2.23	3	dB	2.327

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.239 pounds
Additional Weight per Inch:	0.00725 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.239 lbs [108.41 g]

#### Cable

Cable Type	LMR-400-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	TPE, Black
Jacket Diameter	0.405 in [10.29 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.38 lbs-ft [0.52 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

Low Loss SMA Male to N Male Cable LMR-400-UF Coax with Times Microwave Components



FMC00254

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	N Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50µ" Minimum	50µ" Minimum
Dielectric Type	Teflon	PTFE
Outer Conductor Material and Plating		Brass, Tri-Metal
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	
Torque	7 in-lbs 0.79 Nm	

Environmental Specifications

Operating Range Temperature-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

## Low Loss SMA Male to N Male Cable LMR-400-UF Coax with Times Microwave Components



### FMC00254

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**FMC00254**

**- xx**

**uu**

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: FMC00254-12 = 12 inches long cable  
FMC00254-100cm = 100 cm long cable


Low Loss SMA Male to N Male Cable LMR-400-UF Coax with Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Low Loss SMA Male to N Male Cable LMR-400-UF Coax with Times Microwave Components FMC00254](#)

URL: <https://www.fairviewmicrowave.com/low-loss-sma-male-to-n-male-cable-lmr-400-uf-coax-with-times-microwave-components-fmc00254-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMC00254 CAD Drawing
Low Loss SMA Male to N Male Cable LMR-400-UF Coax with Times Microwave Components

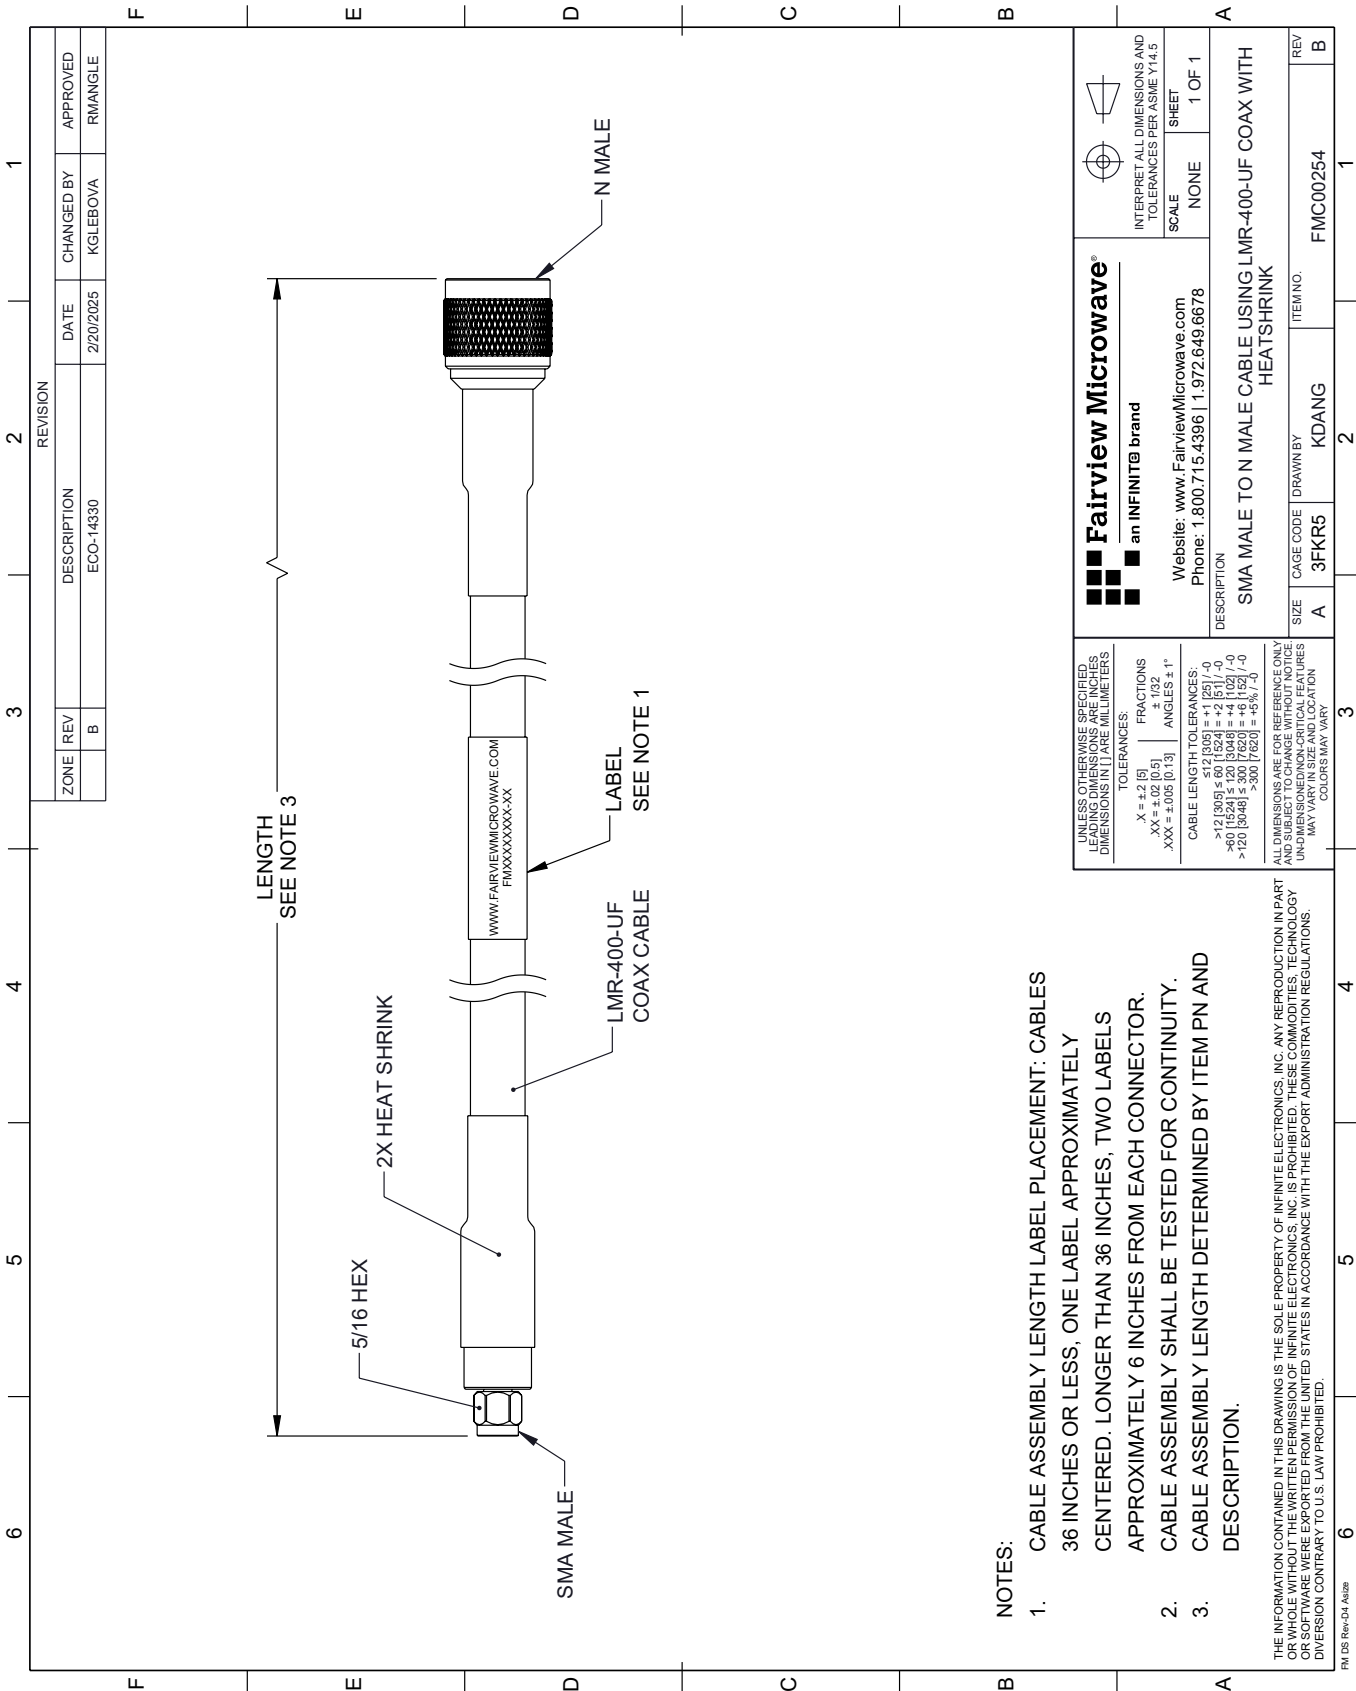

- NOTES:
- 1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: CABLES 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
  - 2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.

FM DS Rev-D4 Addn