



# RA SMA Male to RA SSMC Plug Cable FM-SR086TBJ Coax

Fairview Microwave's SSMC cable assemblies are part of our full line of RF interconnects available for same-day shipping. These SSMC cable assemblies are designed for test applications or connection of your SSMC system components. With a high frequency range up to 12.4 GHz, this family of SSMC cables can also be used to connect your data acquisition system or SSMC connections on your A/D converters. There are hundreds of possible cable assembly configurations to choose from, all available same day.

This SSMC cable assembly datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave not only has many SSMC cable assembly options, but also a wide selection of RF, microwave and millimeter wave cable assemblies which allows RF designers to customize their configurations to whatever is required. Whether the need is to provide low loss SSMC I/O for digital receivers or simply create a custom cable assembly configuration, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom RF cable assemblies for you and ship same day.

## **Electrical Specifications**

Min	Т	ур	Max	ι	Inits
DC			10		GHz
	6	9.5			%
100					dB
	1.43	[4.69]		ns/f	t [ns/m]
	29 [	95.14]		pF/f	[pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω/1000ft [Ω/Km]	
DC Resistance Outer Conductor		10.2 [33.46]		Ω/1000ft [Ω/Km]	
	DC 100	DC 6' 100 1.43 29 ['anductor 65.7 [	DC 69.5 100 1.43 [4.69] 29 [95.14] aductor 65.7 [215.55]	DC 10 69.5 100 1.43 [4.69] 29 [95.14] aductor 65.7 [215.55]	DC 10 69.5 100 1.43 [4.69] ns/fi 29 [95.14] pF/fi nductor 65.7 [215.55] Ω/100

## Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	5	10		GHz
Insertion Loss (Max.)	0.15	0.23	0.55	0.81		dB/ft
	0.49	0.75	1.8	2.66		dB/m

**Electrical Specification Notes:** 

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as  $0.1\ dB$  per connector.

#### **Mechanical Specifications**

### **Cable Assembly**

Diameter 0.315 in [8 mm]

### Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating

FM-SR086TBJ 50 Ohms Solid

Copper Clad Steel, Silver

dB/m



# **Configuration:**

- SMA Male Right Angle
- SSMC Plug Right Angle
- FM-SR086TBJ

## Features:

- Reliable threaded SSMC cable connection
- Max. Operating Frequency of 10 GHz
- Small form factor (SSMC connection is 50% smaller than SMA)
- In stock and ready to ship

# **Applications:**

- Software Defined Radio (SDR)
- Data acquisition systems with SSMC connections
- Digital Wideband Receivers
- · SSMC patch panels
- A/D Conversion

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Dielectric Type PTFE Number of Shields 1

Outer Conductor Material and Plating Tinned Copper Composite Braid

Jacket Material FEP, Black

Jacket Diameter 0.105 in [2.67 mm]


One Time Minimum Bend Radius 0.5 in [12.7 mm]
Repeated Minimum Bend Radius 0.787 in [19.99 mm]

#### **Connectors**

Description	Connector 1	Connector 2		
Туре	SMA Male	SSMC Plug		
Impedance	50 Ohms	50 Ohms		
Mating Cycles		500		
Contact Material & Plating	Brass, Gold over Nickel	Beryllium Copper, Gold		
Contact Plating Spec.	0.2 µin minimum	MIL-G-45204		
Dielectric Type	PTFE	Teflon		
Body Material & Plating	Brass, Gold over Nickel	Brass, Gold		
Body Plating Spec.	0.1 µin minimum	MIL-G-45204		
Coupling Nut Material & Pla	ting Passivated Stainless Steel	Beryllium Copper, Gold		
Coupling Nut Plating Spec.		MIL-G-45204		
Hex Size	5/16 inch			
Torque	8 in-lbs [0.9 Nm]	1.75 in-lbs [0.2 Nm]		

Mechanical Specification Notes:

<sup>\*</sup>All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

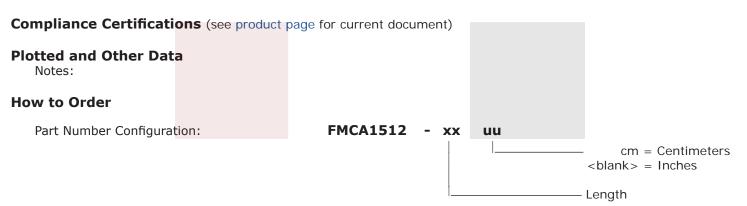

Example: FMCA1512-12 = 12 inches long cable

FMCA1512-100cm = 100 cm long cable





RA SMA Male to RA SSMC Plug Cable FM-SR086TBJ Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: RA SMA Male to RA SSMC Plug Cable FM-SR086TBJ Coax FMCA1512

URL: https://www.fairviewmicrowave.com/ra-sma-male-ra-ssmc-plug-cable-rg405-type-.086-coax-fmca1512-p.aspx







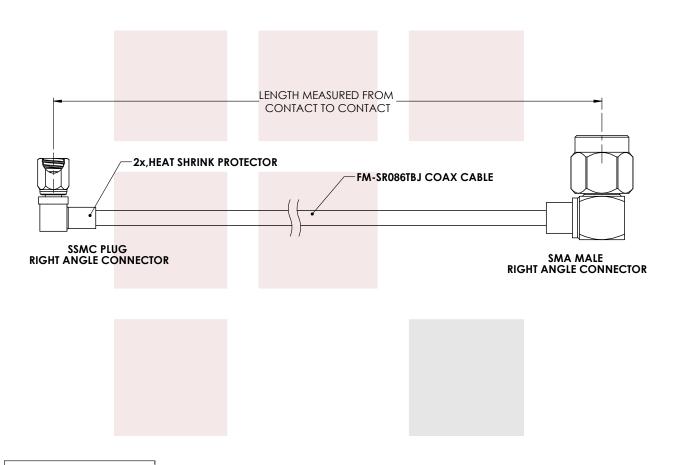

## STANDARD TOLERANCES

 $.X \pm 0.2$   $.XX \pm 0.01$  $.XXX \pm 0.005$ 

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
RA SMA Male to RA SSMC Plug Cable FM-SR086TBJ Coax	DWG NO FMCA1512			CAGE CODE 3FKR5		
	CAD FILE 11/08/2017	SHEET	SCAL	E N/A	SIZE A	CN2245