

FMCA2682-150CM DATA SHEET

TNC Male to BNC Male Cable in 150 CM Length Using RG223 Coax

The TNC male to BNC male cable using RG223 coax, part number FMCA2682-150CM, from Fairview Microwave is in-stock and ships same day. This Fairview TNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA2682-150CM TNC male to BNC male cable assembly operates to 4 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур	Max	U	nits
Frequency Range	DC			4	(GHz
VSWR				1.4:1		
Velocity of Propagation		(66			%
Capacitance		30.8 [101.05] pF/ft [pF/		[pF/m]		
Operating Voltage (AC)				500	Vı	rms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.4	0.51	0.65	0.86	1.64	dB/ft
	1.31	1.67	2.13	2.82	5.38	dB/m

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length* 59.06 in [150.01 cm] Weight 0.2006 lbs [90.99 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1

RG223 50 Ohms Solid Copper, Silver

PE 2

Silver Plated Copper Braid

ON

Configuration:

- TNC Male
- BNC Male
- RG223

Features:

- Max Frequency 4 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications:

- General Purpose
- · Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Shield Layer 2 Jacket Material Jacket Diameter Silver Plated Copper Braid PVC, Black 0.21 in [5.33 mm]

One Time Minimum Bend Radius

1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2		
Туре	TNC Male	BNC Male		
Specification	MIL-STD-348A	MIL-STD-348A		
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Brass, Gold	Brass, Gold		
Contact Plating Spec.	30µ in. minimum	30µ in. minimum		
Dielectric Type	Teflon	Teflon		
Body Material & Plating	Brass, Nickel	Brass, Nickel		
Body Plating Spec.	100μ in. minimum	100µ in. minimum		
Coupling Nut Material & Pla	iting Brass, Nickel			
Coupling Nut Plating Spec.	100µ in. minimum			

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

• Values at 25°C, sea level.

How to Order

Part Number Configuration:

FMCA2682 - xx uu

cm = Centimeters

clank> = Inches

Length

Example: FMCA2682-12 = 12 inches long cable
FMCA2682-100cm = 100 cm long cable






TNC Male to BNC Male Cable in 150 CM Length Using RG223 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: TNC Male to BNC Male Cable in 150 CM Length Using RG223 Coax FMCA2682-150CM

URL: https://www.fairviewmicrowave.com/tnc-male-to-bnc-male-cable-rg223-coax-in-150-cm-and-rohs-fmca2682-150cm-p.aspx

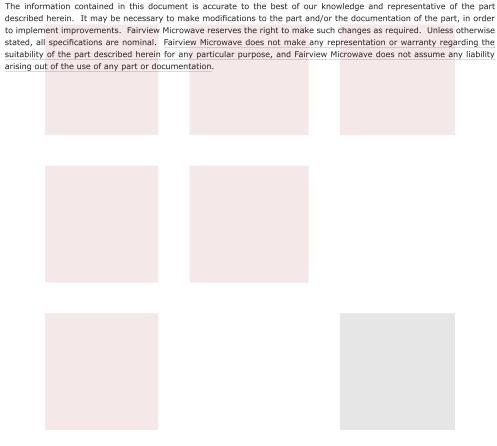



FMCA2682-150CM DATA SHEET

