



Short Open Load Thru (SOLT) Analyzer Calibration Kit with 3.5mm Female Connections in a portable 4-in-1 Design and Operating to 26.5 GHz

Short Open Load Thru (SOLT) Analyzer Calibration Kit, part number FMCK1012, from Fairview Microwave is in-stock and ships same day. This 3.5mm Female SOLT cal kit is designed to be portable, allowing for quick, effective short open load thru calibrations in the field. The calibration components are integrated into a single, compact 4-in-1 kit. This allows for easy transport and storage. The unit can be used for open short load thru (OSLT) calibrations on many different analyzers, including site analyzers, vector network analyzers and cable analyzers. Noninsertable device-under-test (DUT) can now be accommodated because of the integrated 3.5mm thru included as part of the cal kit.

Fairview's short open load thru, 4-in-1 calibration kit FMCK1012 datasheet, specifications and outline drawing are shown in the PDF below. Our extensive offering of RF, microwave and millimeter wave components allows designers to configure and customize their test set-ups and calibrations however they like. From performing OSLT calibrations, field calibrations or VNA calibrations, Fairview Microwave has the right cal kits and other test solutions to meet your needs.

Configuration

Connector

Calibration Kit Component

Open

Short

Load

3.5mm Female Short Open Load 4-in-1





Features:

- Lightweight 4-in-1 Design
- Integrated Short Open Load Thru (SOLT)
- Attached Lanyard
- Gold Plated Short Open Load Thru
- · In Stock and Ready to Ship

Applications:

- · Site Troubleshooting
- 3.5mm Short Open Load Thru Calibration
- Network Analyzer Calibration
- Feeder Cable Test
- SOLT or OSLT Calibration
- Base Station Analyzers

Mechanical Specifications

Size

Weight

Connector

Type

Contact Material and Plating Body Material and Plating

2.752 lbs [1.25 Kg]

3.5mm Female Short Open Load

Beryllium Copper, Gold Beryllium Copper, Gold

> Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





OPEN

ELECTRICAL	MIN	TYP	MAX	UNIT		
FREQUENCY RANGE		DC - 26.5				
IMPEDANCE		50		Ω		
PHASE (DC - 3 GHz)		0.65		degree		
PHASE (3 - 8 GHz)		1.2				
PHASE (8 - 26.5 GHz)		2				
		F				
		F/Hz				
CAPACITANCE		F/Hz ²				
		C3 x 10 ⁻⁴⁵ = -0	F/Hz ³			
DELAY		29.243		ps		
LOSS		2.2		GΩ/s		
CONNECTOR THREAD	1/4 - 36 UNS			inch		
DIMENSION	0.394 (Ø) x 0.945 (L) ± 0.02			inch		

SHORT

31101(1								
ELECTRICA	\L	MIN TYP MAX		MAX	UNIT			
FREQUENCY RANGE			GHz					
IMPEDANCE			50		Ω			
PHASE (DC - 3 GHz)			0.65		degree			
PHASE (3 - 8 GHz)			1.2		degree			
PHASE (8 - 26.5 GHz)		2			degree			
	$L0 \times 10^{-12} = 2.0765$			F				
INDUCTANCE			F/Hz					
INDOCTANCE			F/Hz ²					
			F/Hz³					
DELAY		31.785			ps			
LOSS		2.36			GΩ/s			
CONNECTOR THREAD		1/4 - 36 UNS			inch			
DIMENSION		0.394 (Ø) x 0.945 (L) ± 0.02			inch			





LOAD

20/10								
ELECTRICAL		TYP	MAX	UNIT				
FREQUENCY RANGE	DC - 26.5		5	GHz				
IMPEDANCE		50						
RETURN LOSS (DC - 3 GHz)	40	40 44						
RETURN LOSS (3 - 6 GHz)	36	40		dB				
RETURN LOSS (6 - 26.5 GHz)	30 34			dB				
CONNECTOR THREAD	1/4 - 36 UNS		inch					
DIMENSION	0.39	inch						

THROUGH FEMALE TO FEMALE

ELECTRICAL	MIN	TYP	MAX	UNIT	
FREQUENCY RANGE		DC - 26.5			
IMPEDANCE		Ω			
INSERTION LOSS (DC - 26.5 GHz)	0.1 0.2			dB	
RETURN LOSS (DC - 8 GHz)	30	30 34			
RETURN LOSS (8 - 18 GHz)	28 32			dB	
RETURN LOSS (18 - 26.5 GHz)	26	30		dB	
CONNECTOR THREAD	1/4 - 36 UNS		inch		
DIMENSION	0.33	inch			





USAGE NOTES

- After use please replace protective covers on all connectors.
 We recommend using an anti-humidity case for storage.
- 2. Keep connectors clean.
- 3. Minimize touches with the connectors.
- 4. Do not drop the units, especially onto the connectors.
- Do not insert male pins with a diameter greater than 0.93mm [0.0366 in]. This will damage the female connector.
- Do not mix different connectors (2.4mm, 1.85mm, and 1.0mm) to avoid damage to the connectors.
- When connecting female and male connectors, do not move the female connector of the standard kit. This would damage (loosen) the female connector.
- 8. When connecting female and male connectors, rotate the hex nut of the standard kit male connector (do not move the male connector) slowly to screw onto the female connector thread (do not move the female connector).
- 9. Visually check the connector threads before use.
- 10. Use alcohol and lint-free wipes to clean center conductor pin. Wipe the outer conductor

in a circular motion.

- 11. For best results, use at temperatures between 18°C and 28°C.
- 12. The little difference of gold-plating layer between components does not affect the electrical performance.
- 13. Torque wrench setting should be at 8 in-lb.

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

· Values at 25 °C, sea level





Short Open Load Thru (SOLT) Analyzer Calibration Kit with 3.5mm Female Connections in a portable 4-in-1 Design and Operating to 26.5 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Short Open Load Thru (SOLT) Analyzer Calibration Kit with 3.5mm Female Connections in a portable 4-in-1 Design and Operating to 26.5 GHz FMCK1012


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/open-short-load-calibration-kit-type-3.5mm-female-26.5-mhz-fmck1012-p. aspx

to implem	ent improvements. Fairviev	v Microw	ave reserve	es the righ	it to mak	e such	changes	as requ	ired. Unles	ss ot	herwise
	specifications are nominal.										
	of the part described herei			purpose,	and Fair	view Mi	crowave	does n	ot assume	any	liability
arising ou	t of the use of any part or d	ocument	ation.								





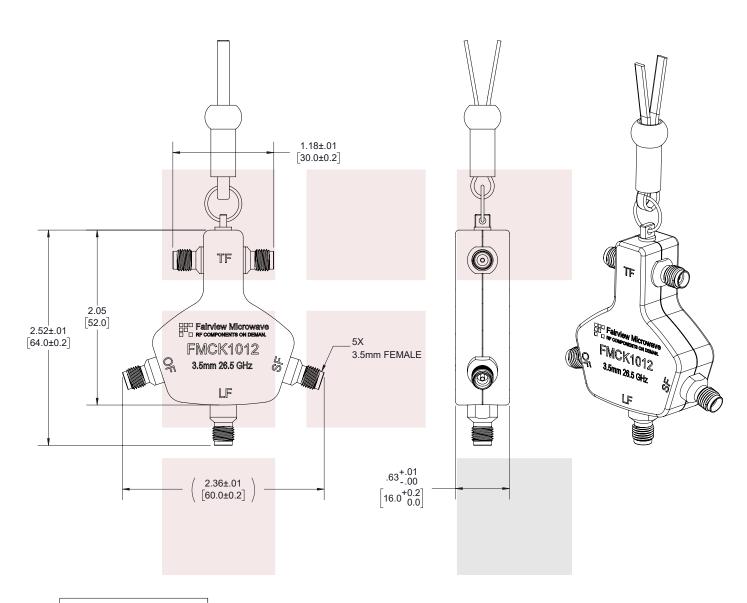

STANDARD TOLERANCES

 $.X \pm 0.2$ $.XX \pm 0.01$

.XXX ±0.01

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
Short Open Load Thru (SOLT) Analyzer Calibration Kit with 3.5mm Female Connections in a portable 4-in-1 Design and Operating to 26.5 GHz	DWG NO FMCK1012				CAGE CODE 3FKR5		
	CAD FILE 020718	SHEET 1 OF 1	SCAL	E N/A	SIZE A	7361	