



# SPDT Latching DC to 18 GHz Terminated Electro-Mechanical Relay Switch, Indicators, up to 90W, 24V, SMA

The FMSW6406 is a Single Pole Double Throw (SPDT) electromechanical relay switch that operates across a wide frequency range of DC to 18 GHz and can handle up to 90 Watts of CW input power in a break before make condition. The design features a Latching actuator and is rated for 5M life cycles for high reliability operation. Impressive performance includes insertion loss less than 0.15 dB typical and isolation greater than 85 dB typical. The Latching actuator includes Indicators and a +24 Vdc bias voltage, and operates over a temperature range of -25°C to +70°C. The rugged and compact package assembly supports SMA Female connectors and Solder Pins for DC Control. And for highly reliable operation, the model is guranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

#### **Electrical Specifications**

Switch Type SPDT, Terminated
Actuator Type Latching
Switching Sequence Break before Make
Actuator Options Indicators
Indicator Rating 1 Watts / 32 Volts / 125 mA

Description Min Max Units Typ DC Frequency Range 18 GHz **Impedance** 50 Ohms Ohms Termination Impedance 50 Operating Voltage 22 24 26 Volts Actuating Current @ 24 Volts 110 mA

| VSWR                       |       | 1.2:1 | 1.4:1 |       |
|----------------------------|-------|-------|-------|-------|
| Insertion Loss             |       | 0.15  | 0.35  | dB    |
| Insertion Loss Repeatab    | ility |       |       |       |
| Isolation                  | 65    | 85    |       | dB    |
| Input Power (CW)           |       |       | 60    | Watts |
| Termination Input Power (C | W)    |       | 5     | Watts |
| Switching Time             |       |       | 20    | ms    |
|                            |       |       |       |       |

#### Performance by Frequency

| Description         | F1     | F2     | F3      | F4 | F5 | Units |
|---------------------|--------|--------|---------|----|----|-------|
| Frequency Range     | DC - 6 | 6 - 12 | 12 - 18 |    |    | GHz   |
| VSWR, Max           | 1.2:1  | 1.3:1  | 1.4:1   |    |    |       |
| Insertion Loss, Max | 0.15   | 0.25   | 0.35    |    |    | dB    |
| Isolation, Min      | 85     | 70     | 65      |    |    | dB    |
| Power In, Typ (CW)  | 90     | 75     | 60      |    |    | Watts |



### Features:

- Single Pole Double Throw
- DC to 18 GHz Frequency Range
- Isolation greater than 85 dB typical
- 5M Cycle Min Operating Life
- +24 Volt DC
- 90 Watt average Power
- Latching Actuator
- 1 Watt Indicators
- Internally Terminated
- -25 to +70°C Operating Temperature
- Insertion Loss as low as 0.15 dB Max
- VSWR as low as 1.2:1 max
- SMA Female RF connectors
- Solder Pins for DC Control
- Hot Switching Capability
- Consult Factory
- S-Parameter Data available upon request

#### Applications:

- High Performance Relay Switch
- Military Communications
- Communications Systems
- Test & Measurement

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





## **Mechanical Specifications**

Size

Weight 0.148 lbs [67.13 g]
Package Type Connectorized

Operating Life 5,000,000 Cycles

**Connectors** 

RF Connector Type SMA Female Control Connector Solder Pin

#### **Environmental Specifications**

**Temperature** 

Operating Range -25 to +70 deg C Storage Range -55 to +100 deg C


Shock MIL-STD-202 Method 213, Cond. D 500G Non Operating Vibration MIL-STD-202 Method 214, Cond. D 10G RMS Non Operating

#### **Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**


Notes:

#### **Typical Performance Data**

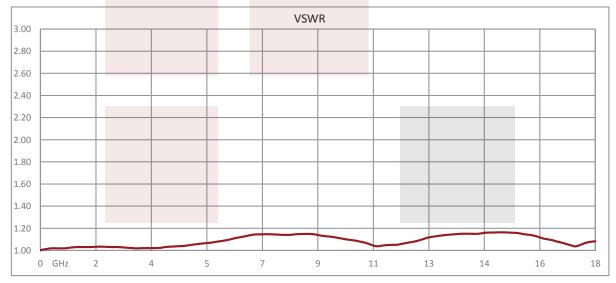





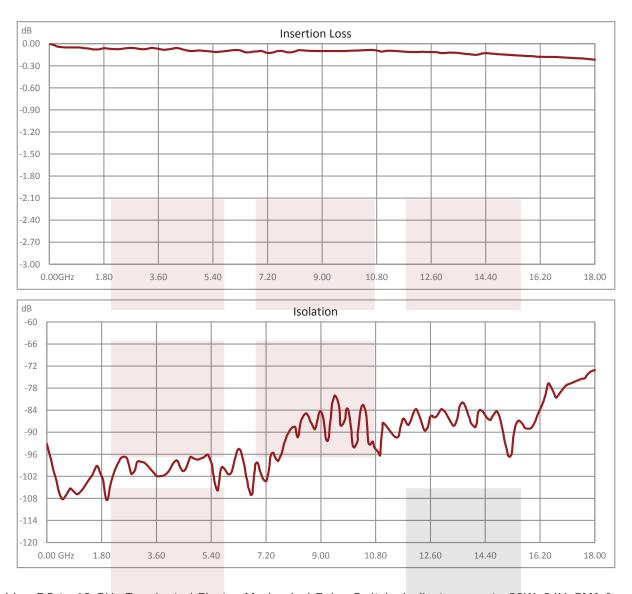

SPDT Latching DC to 18 GHz Terminated Electro-Mechanical Relay Switch, Indicators, up to 90W, 24V, SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: SPDT Latching DC to 18 GHz Terminated Electro-Mechanical Relay Switch, Indicators, up to 90W, 24V, SMA FMSW6406

URL: https://www.fairviewmicrowave.com/spdt-latching-18-ghz-terminated-electro-mechanical-relay-switch-60w-24v-sma-fmsw6406-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.






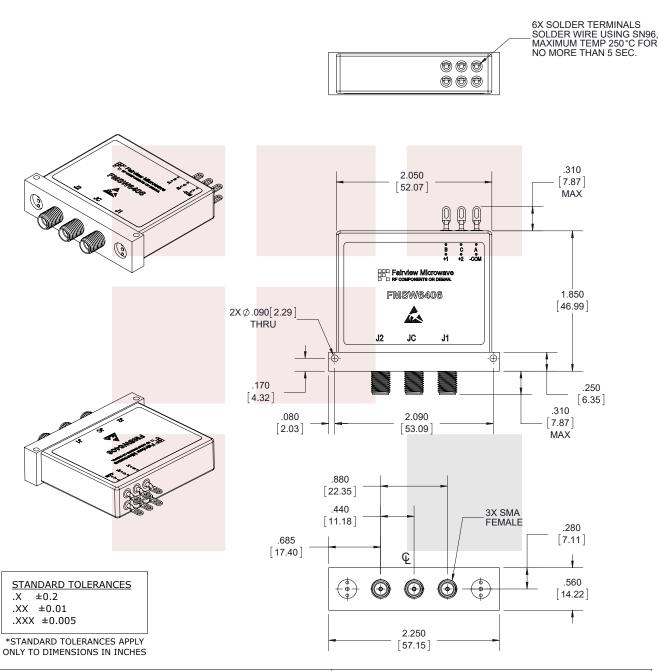

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM                                             | NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm]. |       |        |      |       |                 |      |  |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-------|-----------------|------|--|
| CDDT Latching DC to 10 CUT Townsingted Floating                                                               | FMSW6406                                                                                                                                                                      |       |        |      |       | CAGE CODE 3FKR5 |      |  |
| SPDT Latching DC to 18 GHz Terminated Electro-<br>Mechanical Relay Switch, Indicators, up to 90W, 24V,<br>SMA | CAD FILE 090617                                                                                                                                                               | SHEET | 1 OF 1 | SCAL | E N/A | SIZE A          | 7361 |  |





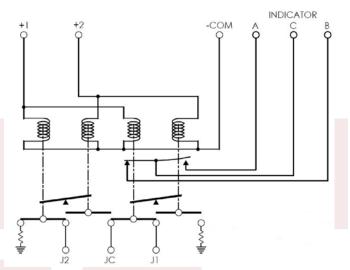

## SCHEMATIC SHOWN IN LATCHING POSITON

| OPERATIONAL |       |           |           |           |       |               |               |  |  |  |
|-------------|-------|-----------|-----------|-----------|-------|---------------|---------------|--|--|--|
| LOGIC TABLE |       |           |           |           |       |               |               |  |  |  |
| TERM        | INALS | RF PORTS  |           | INDICATOR |       | TERMINATION   |               |  |  |  |
| 1           | 2     | J1-JC     | J2-JC     | B-C       | A-C   | J2 TERMINATED | J1 TERMINATED |  |  |  |
| 0           | 0     | NO CH     | NO CHANGE |           | IANGE | NO CHANGE     |               |  |  |  |
| 0           | 1     | OFF       | ON        | OFF       | ON    | OFF           | ON            |  |  |  |
| 1           | 0     | ON        | OFF       | ON        | OFF   | ON            | OFF           |  |  |  |
| 1           | 1     | FORBIDDEN |           | FORBIDDEN |       | FORBIDDEN     |               |  |  |  |

STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM                                             | 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. |       |                 |        |      |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------|-----------------|--------|------|
| SPDT Latching DC to 18 GHz Terminated Electro-<br>Mechanical Relay Switch, Indicators, up to 90W, 24V,<br>SMA | FMSW6406                                                                |       | CAGE CODE 3FKR5 |        |      |
|                                                                                                               | CAD FILE 090617 SHEET 2 OF 2                                            | SCALI | E N/A           | SIZE A | 7361 |