

**Broadband Gain Horn Antenna, 0.6 GHz to 6 GHz**  
**11 dBi Gain, N Type Female Connector**

The FMWAN1150 broadband gain horn antenna (double ridge waveguide horn) from Fairview is part of our comprehensive selection of waveguide antennas. This broadband horn features an N Female coaxial connector and operates from 0.6 to 6 GHz.

Our FMWAN1150 broadband gain horn antenna has a nominal gain of 11 dBi with a typical input VSWR of 1.5:1. Fairview's double-ridge broadband horns are available in 10, 11, 13, 15, and 20 dBi models with varying cross band frequency ranges to suit all application needs.

Waveguide antennas, such as the FMWAN1150 are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our double ridge waveguide antennas with N Female interface are part of over 40,000 RF, microwave, and millimeter wave components from Fairview available worldwide and Ship same day.

**Configuration**

Pattern	Directional
Polarization	Linear
Antenna Design Type	Broadband Gain Horn
RF Connector	N Female

**Electrical Specifications**

Description	Min	Typ	Max	Units
Frequency Range	0.6		6	GHz
Gain		11		dBi
VSWR		1.5:1		

**Mechanical Specifications**

<b>Size</b>	
Length	17 in 431.8 mm
Width	11.3 in 287.02 mm
Height	13 in 330.2 mm
Weight	17 lbs 7.71 kg
Body Material and Plating	Aluminum, Powder Coat
RF Connector	N Female

**Environmental Specifications**

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:



**Features:**


- Antenna Measurements
- Laboratory Use
- Microwave Testing
- Radome Testing
- EMC measurement
- Satellite Antenna Testing


**Applications:**

- Ultra Broadband 600 MHz to 6 GHz
- Double-Ridge Waveguide
- Linearly Polarized
- 11 dBi Nominal Gain
- N Female Connector
- Mounting Bracket Included
- Powder Coated Aluminum


Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Typical Performance Data**

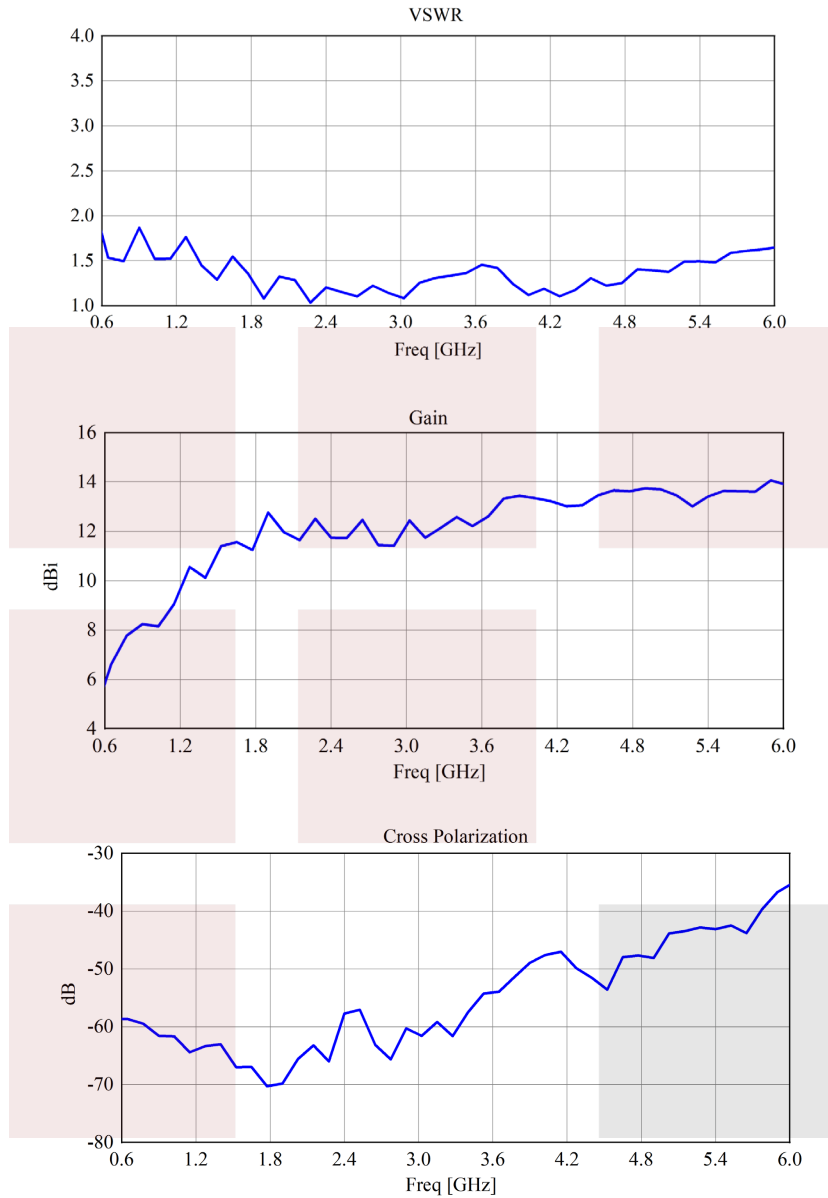


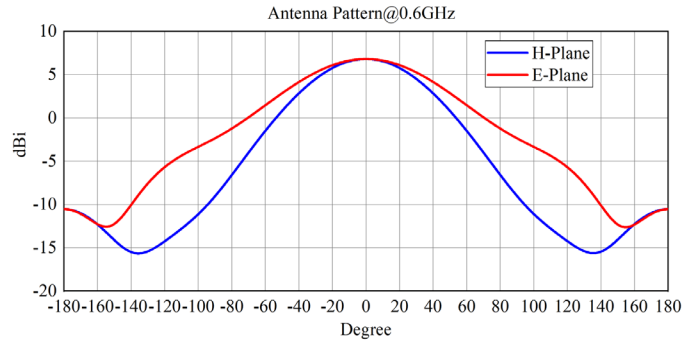


3dB beamwidth (°): E plane: 85.6      H plane: 69

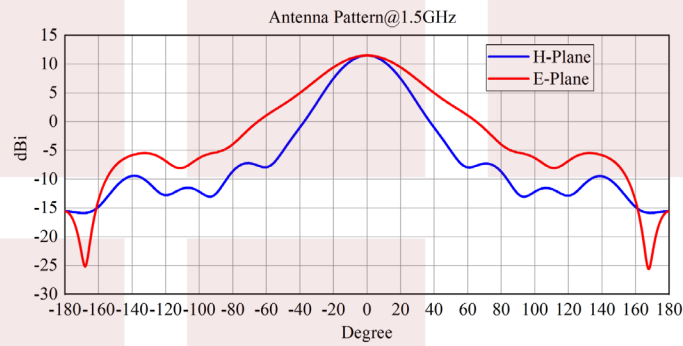

3dB beamwidth (°): E plane: 49.4      H plane: 34.4

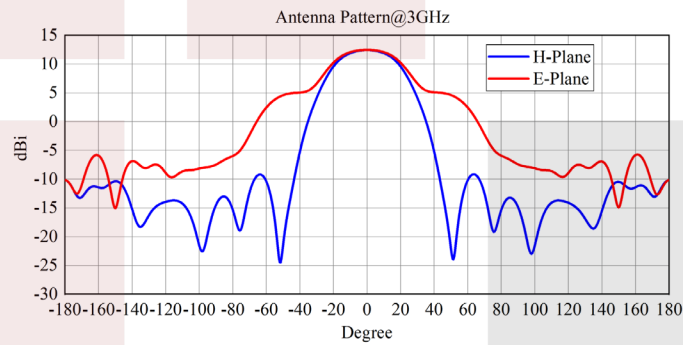


3dB beamwidth (°): E plane: 44.9      H plane: 40.6

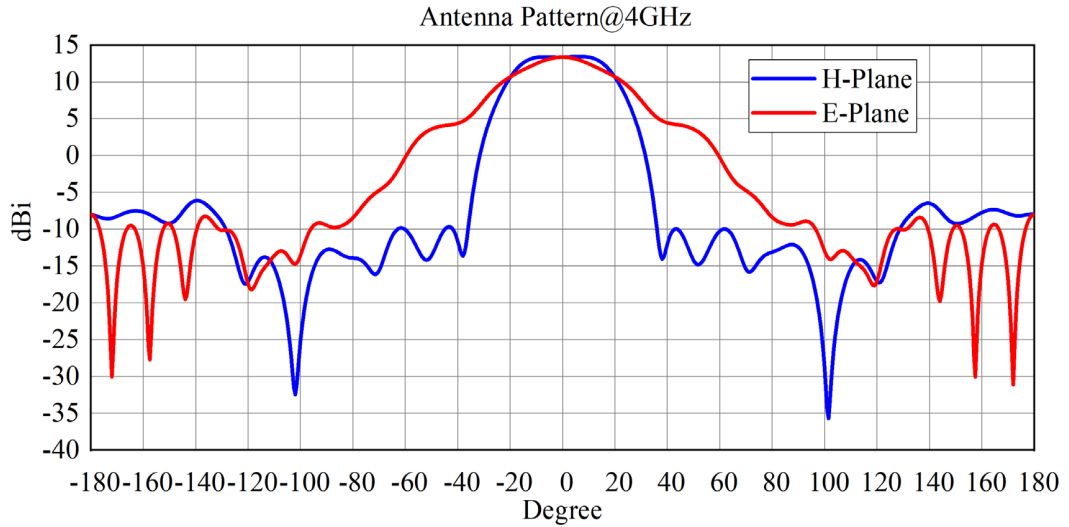

3dB beamwidth (°): E plane: 43.1

H plane: 40.6

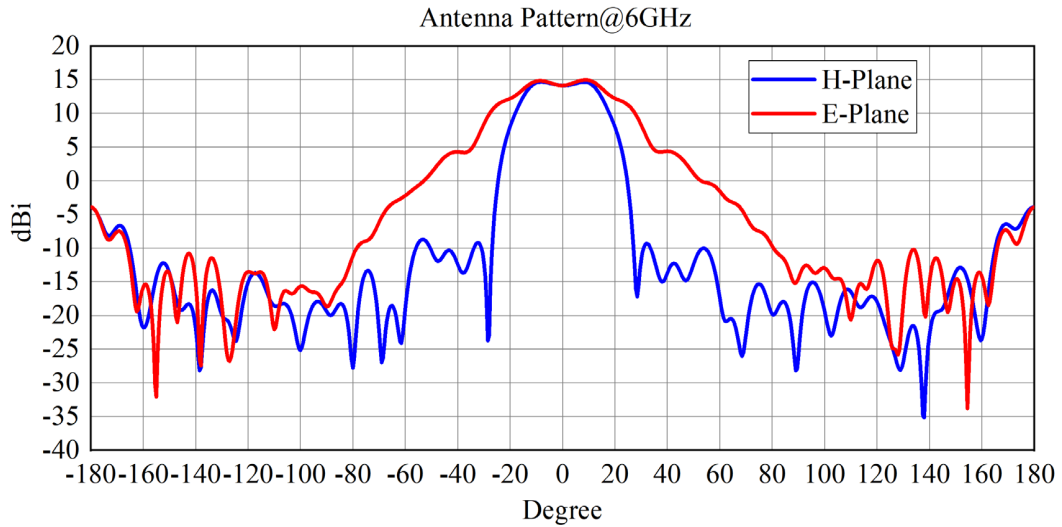

3dB beamwidth (°): E plane: 43

H plane: 32.1

Broadband Gain Horn Antenna, 0.6 GHz to 6 GHz 11 dBi Gain, N Type Female Connector from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Broadband Gain Horn Antenna, 0.6 GHz to 6 GHz 11 dBi Gain, N Type Female Connector FMWAN1150](#)

URL: <https://www.fairviewmicrowave.com/waveguide-horn-antenna-flange-11dbi-6-ghz-fmwan1150-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

