

**Broadband Horn Antenna, Dual Polarized 0.8 GHz to 11 GHz 15 dBi Gain, SMA Female Connector**

The FMWAN1163 dual polarized broadband horn antenna (also known as a quad ridge horn antenna) from Fairview Microwave is part of our comprehensive selection of broadband antennas. This quad-ridge waveguide horn features dual SMA Female coaxial connector and operates from 0.8 GHz to 12 GHz.

Our FMWAN1163 open boundary dual polarized broadband horn antenna has a nominal gain of 11 dBi with a typical input VSWR of 1.5:1. Fairview Microwave's broadband horns are available with gain values from 6 to 21 dBi with varying frequency ranges to suit the application needs.

Quad ridge horn antennas, such as the FMWAN1163 are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our broadband antennas are part of over 40,000 RF, microwave, and millimeter wave components from Fairview Microwave available worldwide and ship same day.

**Configuration**

Pattern	Directional
Polarization	Dual Linear
Antenna Design Type	Broadband Gain Horn
RF Connector	SMA Female

**Electrical Specifications**

Description	Min	Typ	Max	Units
Frequency Range	0.8		12	GHz
Gain		11		dBi
VSWR		1.5:1		


**Performance by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency Range	0.8 to 3.2	3.2 to 5.6	5.6 to 8	8 to 10.4	10.4 to 12	GHz
Gain, Typ	10	13.5	15	14	15	dB

**Mechanical Specifications**

<b>Size</b>	
Length	12.755906 in 324 mm
Width	12.755906 in 324 mm
Height	17.874016 in 454 mm
Weight	11.04 lbs 5.01 kg
Body Material and Plating	Aluminum
RF Connector	SMA Female

**Environmental Specifications**



**Features:**

- Ultra Broadband 0.8 GHz to 12 GHz
- Open Boundary Quad-Ridge Waveguide
- Dual Polarized
- 11 dBi Nominal Gain
- Dual SMA Female Coaxial Connector
- Mounting Bracket Included
- Powder Coated Aluminum

**Applications:**

- Antenna Measurements
- Laboratory Use
- Microwave Testing
- Radome Testing
- EMC measurement
- Satellite Antenna Testing
- Radar Cross Section


Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)


**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**Typical Performance Data**

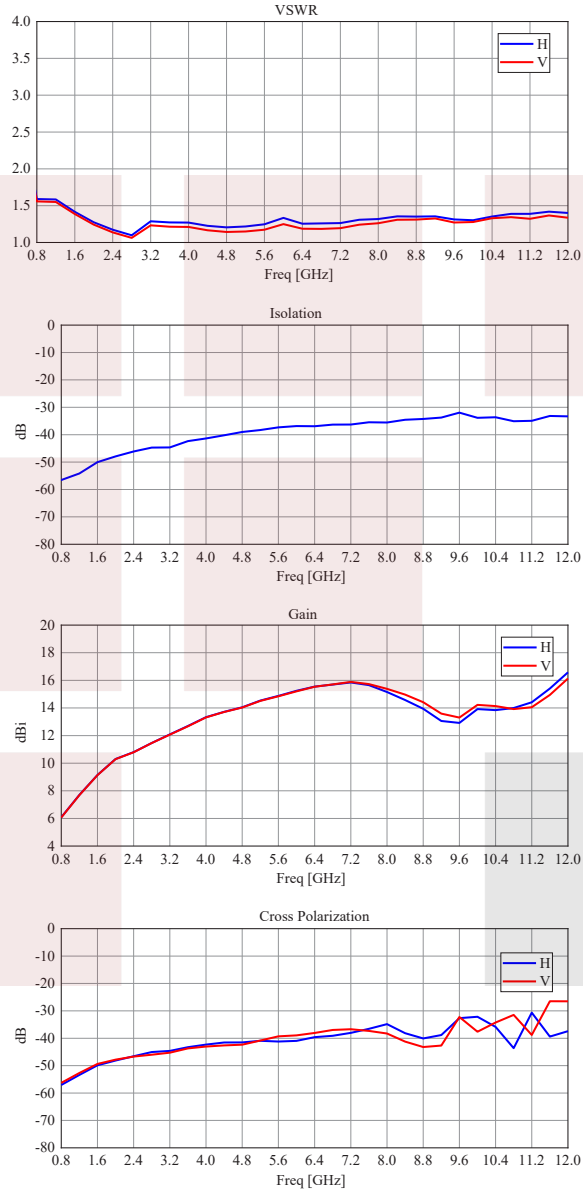

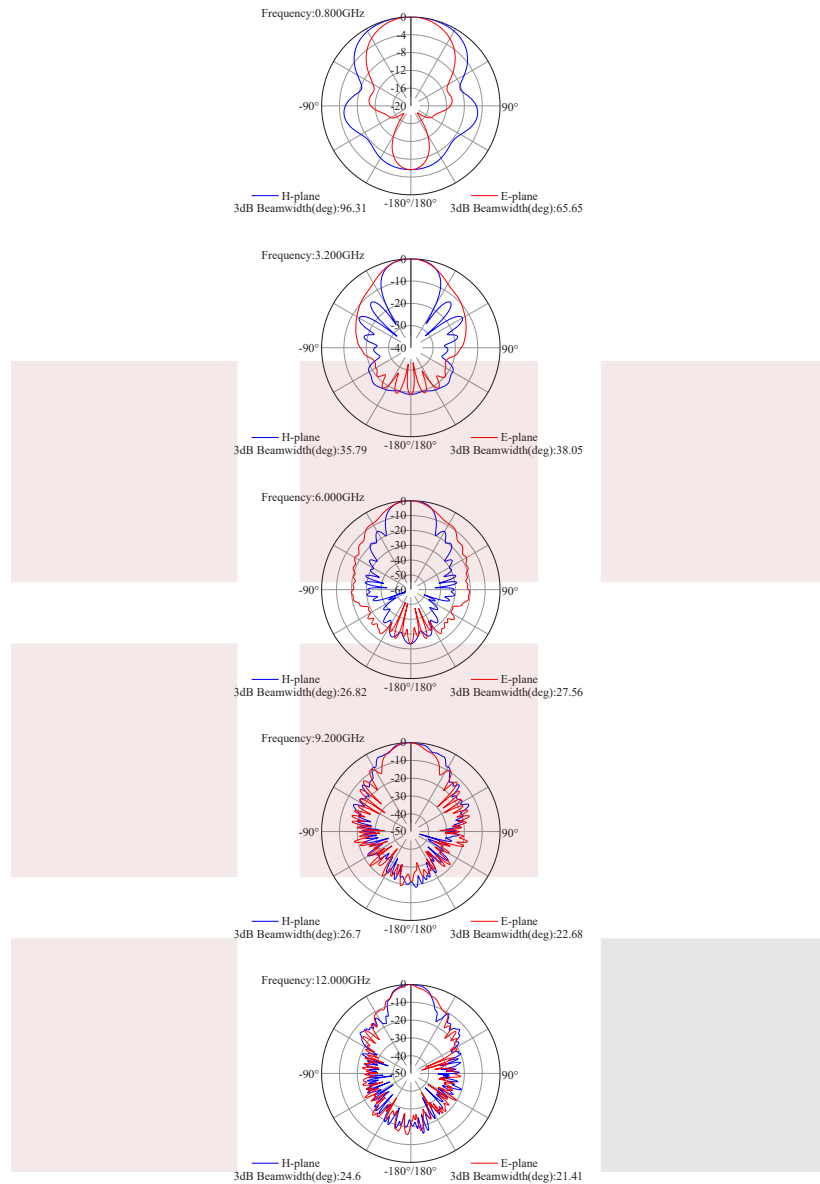

Broadband Horn Antenna, Dual Polarized 0.8 GHz to 11 GHz 15 dBi Gain, SMA Female Connector from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Broadband Horn Antenna, Dual Polarized 0.8 GHz to 11 GHz 15 dBi Gain, SMA Female Connector FMWAN1163](#)

URL: <https://www.fairviewmicrowave.com/waveguide-horn-antenna-flange-11dbi-12-ghz-fmwan1163-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

