Fairview Microwave

an INFINITE brand



5 dB Fixed Attenuator 2.4mm Male to 2.4mm Female Up to 50 GHz Rated to 1 Watt with Passivated Stainless Steel Body

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The SA5074-05 is a 5 dB Fixed Attenuator that operates from DC to 50 GHz and is rated to 1 Watt. The versatile coaxial package uses 2.4mm male to 2.4mm female connectors and is also REACH and RoHS compliant.

Electrical Specifications

| Description | Min | Тур | Мах | Units |
|----------------------------|----------|-----|--------|-------|
| Frequency Range | DC | 71 | 50 | GHz |
| Impedance | _ | 50 | | Ohms |
| Nominal Attenuation | | 5 | | dB |
| VSWR | | | 1.75:1 | |
| Input Power, CW | | | 1 | Watt |
| derated linearly to 0.1W a | t +100°C | | | |

SA5074-05 DATA SHEET

Features:

- DC to 50 GHz Frequency Range
- Attenuation 5dB Typical
- Max Power 1 Watt (CW)
- VSWR < 1.75:1

Applications:

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Specifications by Frequency

| • | · · | • | | | | |
|-------------------|----------------------|------------|----------------------|----|----|-------|
| Description | F1 | F2 | F3 | F4 | F5 | Units |
| Range | DC to 26.5 | 26.5 to 40 | 40 to 50 | | | GHz |
| VSWR, Max | 1.35 <mark>:1</mark> | 1.6:1 | 1.7 <mark>5:1</mark> | | | |
| Atten Accuracy, M | 1ax ±0.5 | ±1 | ±1.5 | | | dB |

Mechanical Specifications

Size Length Width/Diameter Weight Body Material and Plating

Configuration

Design Package Style 0.87 in [22.1 mm] 0.312 in [7.92 mm] 0.012 lbs [5.44 g] Passivated Stainless Steel

Fixed Connectorized Module

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com

Fairview Microwave

an INFINIT[®] brand



Connectors

| 2.4mm Male | 2.4mm Female |
|----------------------------|---|
| Beryllium Copper, Gold | Beryllium Copper, Gold |
| MIL-PRF-39012 | MIL-PRF-39012 |
| Passivated Stainless Steel | Passivated Stainless Steel |
| | Beryllium Copper, Gold MIL-PRF-39012 |

Mechanical Specification Notes:

The connectors use high temperature plastic bead dielectric.

| Environmental Specifi | cations | |
|--------------------------------|---|--|
| Temperature Operating Range | -55 to +100 deg C | |
| Compliance Certificati | ons (see product page for current document) | |

Plotted and Other Data

Notes:

5 dB Fixed Attenuator 2.4mm Male to 2.4mm Female Up to 50 GHz Rated to 1 Watt with Passivated Stainless Steel Body from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 5 dB Fixed Attenuator 2.4mm Male to 2.4mm Female Up to 50 GHz Rated to 1 Watt with Passivated Stainless Steel Body SA5074-05

URL: https://www.fairviewmicrowave.com/5db-fixed-attenuator-2.4mm-male-2.4mm-female-1-watt-sa5074-05-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





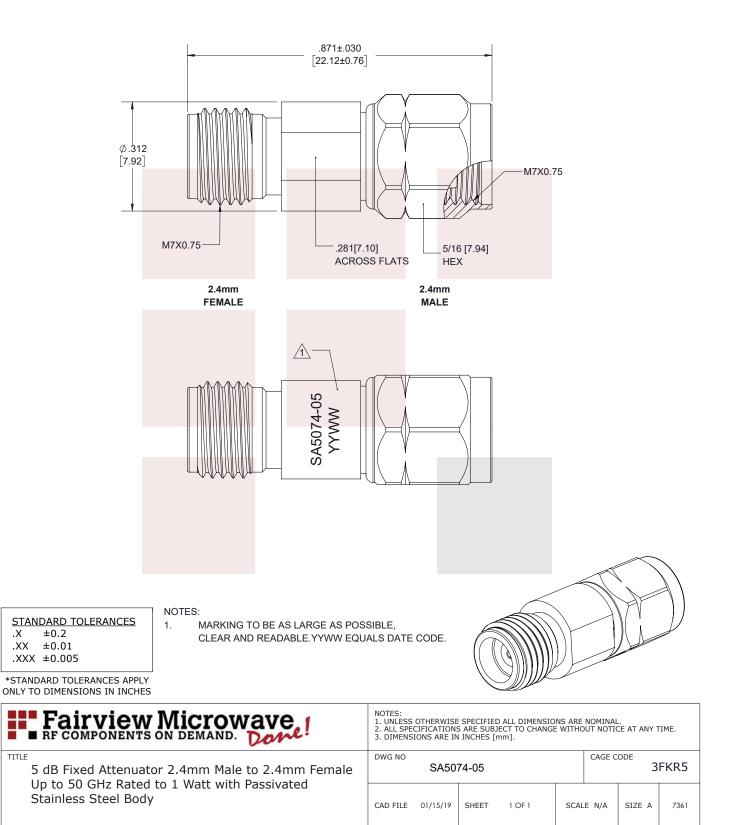

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689