**Fairview Microwave** 

# **RF Load 100 Watts High Power To 8 GHz Conduction Cooled Body Black Anodized Aluminum Heatsink N Female**

High power RF termination (also called RF load or dummy load) SAT8N-100F from Fairview Microwave operates from DC to 8 GHz and handles up to 100 Watts (CW). This N termination (or load) has a female gender. SAT8N-100F N load termination offers 1.5:1 max VSWR. This high power 100W N terminator from Fairview Microwave has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF terminations / loads are critical passive components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can reduce the signal integrity and can potentially damage the device. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These radio frequency termination components are commonly used to terminate devices such as couplers, circulators, and switches. Loads / terminations are also widely used in measurement systems to ensure accurate results. Fairview offers a large selection of in-stock RF, microwave and millimeter wave terminations up to 65 GHz with great performance over the entire operating range and with power handling capabilities up to 800 Watts (CW).

### **Electrical Specifications**

Min	Тур	Мах	Units
DC		8	GHz
	50		Ohms
		1.5:1	
		100	Watts
		2	kWatts
		DC	DC 8 50 1.5:1

## **Features:**

- High Power RF Load
- DC to 8 GHz Frequency Range
- VSWR 1.5:1 Max
- Max Power 100 Watts (CW)
- N Female Coaxial Interface

# **Applications:**

- Wireless
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military
  Communication

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Freq. Range	DC-2	2-4	4-6	6-8		GHz
VSWR, Max	1.2: <mark>1</mark>	1.35:1	1.4 <mark>5:1</mark>	1.5:1		

#### **Mechanical Specifications**

Finish

Configuration Connector

Connector Connector Specification Black

N Female MIL-STD-348

#### Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com

# SAT8N-100F DATA SHEET





#### **Material Specifications**

Description	Material	Plating			
Connector 1 Contact	Beryllium Copper	Gold			
Insulation	PTFE				
Outer Conductor	Passivated Stainless Steel				
Body	Passivated Stainless Steel				
Housing	Black Anodized Aluminum Heatsink				

**Environmental Specifications** 

**Temperature** Operating Range

-55 to +125 deg C

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

RF Load 100 Watts High Power To 8 GHz Conduction Cooled Body Black Anodized Aluminum Heatsink N Female from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: RF Load 100 Watts High Power To 8 GHz Conduction Cooled Body Black Anodized Aluminum Heatsink N Female SAT8N-100F

URL: https://www.fairviewmicrowave.com/rf-load-100-watts-8-ghz-n-female-sat8n-100f-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





SIZE A

7361

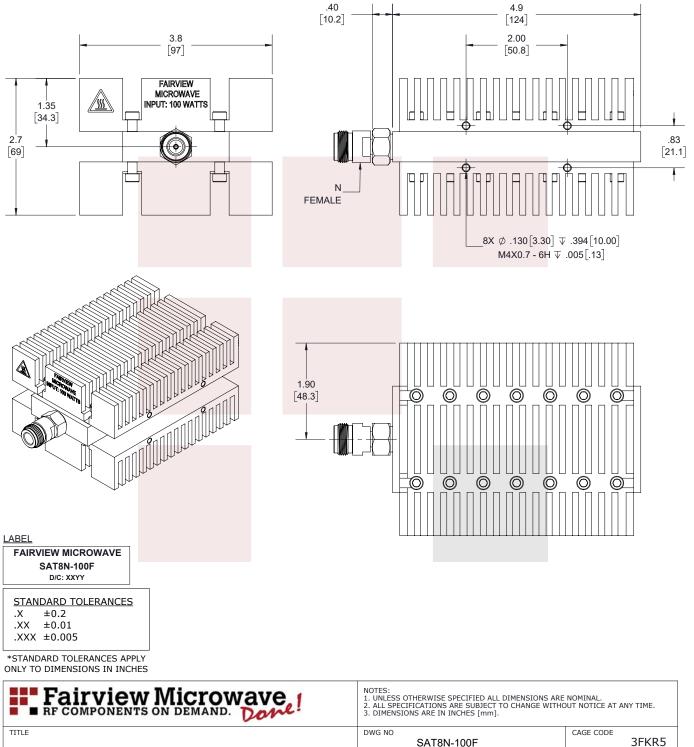

RF Load 100 Watts High Power To 8 GHz Conduction Cooled Body Black Anodized Aluminum Heatsink N Female

GHz Conduction um Heatsink N	SAT8N-100F					
	CAD FILE	01/28/19	SHEET	1 OF 1	SCAL	E N/A

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689