

SMA Sexless Open Circuit Connector Cap

Mechanical Specifications

Configuration

Connector SMA Sexless Non-Shorting

Description	Material	Plating
Body	PE	

Size

Length 0.48 in [12.19 mm]
 Height 0.54 in [13.72 mm]
 Weight 0.00008 lbs [0.04 g]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Sexless Open Circuit Connector Cap from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [SMA Sexless Open Circuit Connector Cap SC2026](#)

URL: <https://www.fairviewmicrowave.com/sma-sexless-open-circuit-connector-cap-sc2026-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

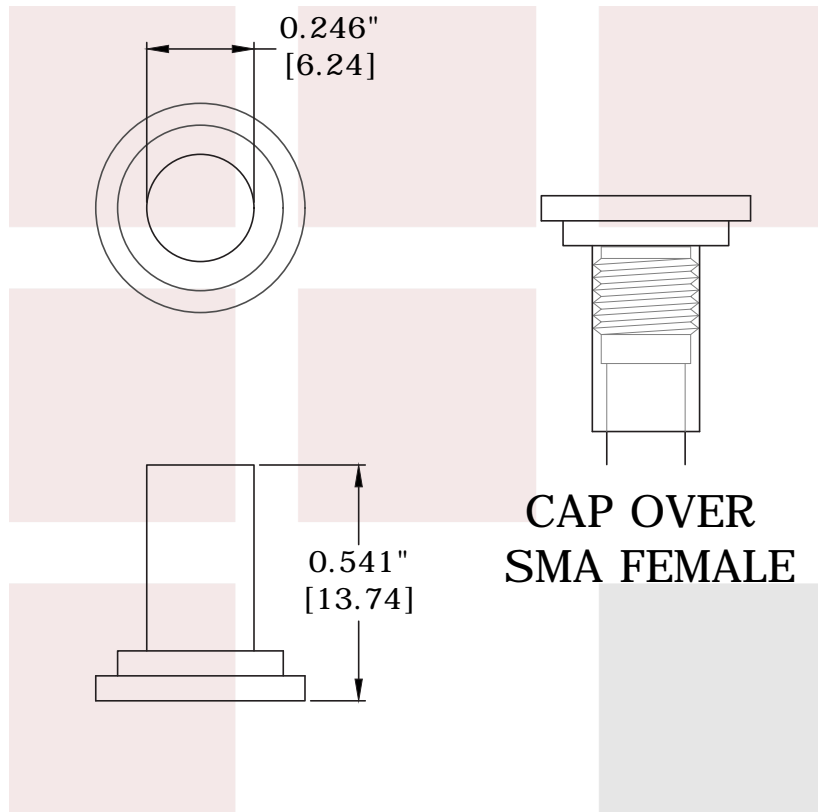

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE SMA Sexless Open Circuit Connector Cap		DWG NO SC2026		CAGE CODE 3FKR5	
CAD FILE	020916	SHEET	SCALE	N/A	SIZE A 5568