

SM3190 DATA SHEET

2.92mm Male to 2.4mm Male Adapter

2.92mm male to 2.4mm male adapter part number SM3190 from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.4mm adapter has a male to male gender configuration and is built of durable stainless steel. SM3190 2.92mm male to 2.4mm male adapter operates to 40 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum. The 2.92mm connector mates mechanically with commercially available SMA and 3.5mm connectors. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units	
Frequency Range	DC		40	GHz	
VSWR			1.25:1		
VSWR			1.25:1		

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

опистов ороспистово	
Size	
Length	0.763 in [19.4 mm]
Weight	0.0134 lbs [6.08 g]

Description	Connector 1	Connector 2
Туре	2.92mm Male	2.4mm Male
Polarity	Standard	Standard
Mating Cycles	500	500
Mating Torque	8 to 10 in-lbs	8 to 10 in-lbs
	[0.90 to 1.13 Nm]	[0.90 to 1.13 Nm]



Configuration:

- 2.92mm Male Connector 1
- 2.4mm Male Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.25:1 max up to 40 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2
Туре	2.92mm Male	2.4mm Male
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold over Nickel	Gold over Nickel
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Insulation Material	Oxide-Noryl	Oxide-Noryl
Body Material	Passivated Stainless Sto	eel Passivated Stainless Steel
Body Plating Spec.	ASTM A380	ASTM A380
Coupling Nut Material	Passivated Stainless Ste	eel Passivated Stainless Steel
Coupling Nut Plating Spec.	ASTM A380	ASTM A380

Environmental Specifications

Temperature

Operating Range Vibration Salt Spray -55 to +100 deg C

MIL-STD 202, Method 204, Condition D (20 G's)


MIL-STD 202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

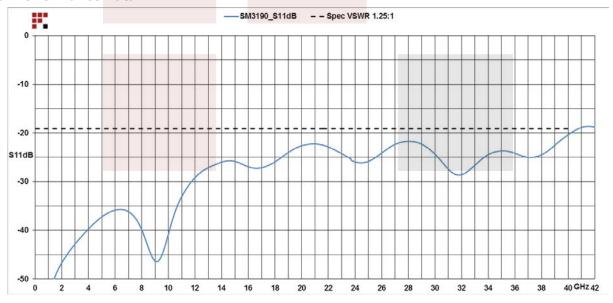





2.92mm Male to 2.4mm Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 2.92mm Male to 2.4mm Male Adapter SM3190

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/2.92mm-male-2.4mm-male-adapter-sm3190-p.aspx

to implem	ent improv	ements.	Fairview	Microw	ave reserve	es the righ	nt to mak	e such	changes a	as requ	uired. Unles	ss oth	nerwise
stated, al	l specificati	ons are	nominal.	Fairvie	w Microwa	ve does n	ot make	any rep	resentat	ion or	warranty re	gard	ing the
suitability	of the par	t describ	ed hereir	n for any	particular	purpose,	and Fair	view M	crowave	does r	not assume	any	liability
arising ou	t of the use	e of any	part or do	ocument	ation.								





