



RA N Male (Plug) to N Female (Jack) Adapter, Nickel Plated Brass Body, High Temp, 1.3 VSWR

RA type N male to type N female adapter part number SM4529 from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N adapter has a male to female gender configuration. SM4529 type N male to type N female adapter operates to 11 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum. This right angle type N adapter allows for easier connections in tight spaces.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		11	GHz
VSWR			1.3:1	
Operating Voltage (AC)			1,000	Vrms

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Description	Connector 1	Connector 2
Weight		0.157 lbs [71.21 g]
Height		1.371 in [34.82 mm]
Width		1.268 in [32.21 mm]
Length		1.441 in [36.6 mm]
Size		
_		

Description	Connector 1	Connector 2	
Туре	N Male	N Female	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-348A	MIL-STD-348A	



Configuration:

- N Male Connector 1
- N Female Connector 2
- 50 Ohm
- Right Angle Body Geometry

Features:

- VSWR of 1.3:1 max up to 11 GHz
- Type N interface meets MIL-STD-348A
- · 30µ in. minimum contact plating
- Gold Plated Brass Contact

Applications:

General Purpose Test

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description Connector 1		Connector 2	
Туре	N Male	N Female	
Contact Material	Brass	Brass	
Contact Plating	Gold	Gold	
Contact Plating Spec.	30μ in. minimum	30μ in. minimum	
Insulation Material	PTFE	PTFE	
Outer Contact Material		Brass	
Outer Contact Plating	Contact Plating		
Outer Conductor Contact Spec.		100 µin minimum	
Body Material	Brass		
Body Plating	Nickel		
Body Plating Spec.	100 μin minimum		
Gasket Material	Silicone		
Coupling Nut Material	Brass		
Coupling Nut Plating	Nickel		
Coupling Nut Plating Spec.	100 µin minimum		

Environmental Specifications

Temperature


Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

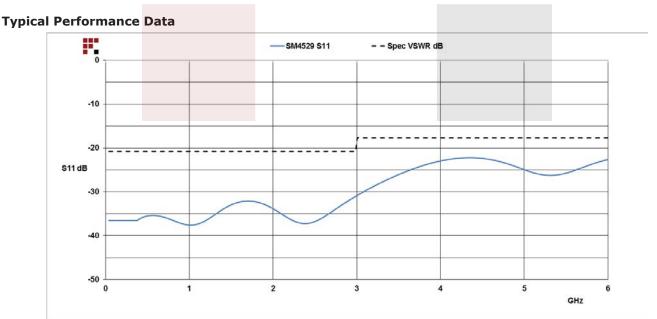






RA N Male (Plug) to N Female (Jack) Adapter, Nickel Plated Brass Body, High Temp, 1.3 VSWR from Fairview Microwave is instock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: RA N Male (Plug) to N Female (Jack) Adapter, Nickel Plated Brass Body, High Temp, 1.3 VSWR SM4529

URL: https://www.fairviewmicrowave.com/ra-n-male-n-female-adapter-sm4529-p.aspx

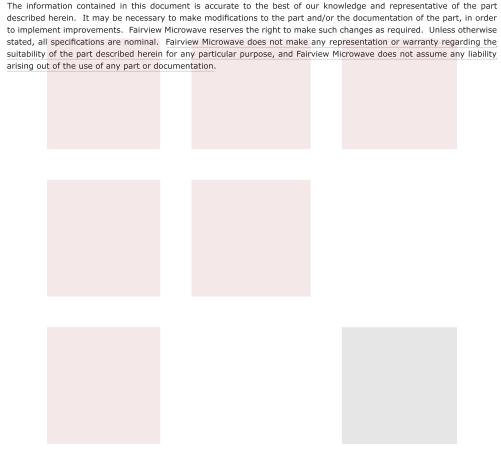





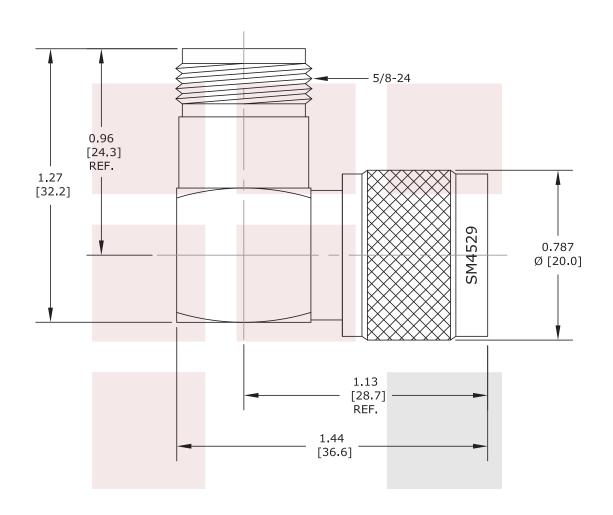

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

.XXX ±0.05

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
RA N Male (Plug) to N Female (Jack) Adapter, Nickel Plated Brass Body, High Temp, 1.3 VSWR	DWG NO	SM4529	M4529 CAGE CODE 3FI		FKR5
	CAD FILE 121715	SHEET	SCALE	N/A	SIZE A