

SMA Male to SMA Female Bulkhead Cable RG-188 Coax




FMCA9995

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Female Bulkhead
- Cable Type: RG-188
- Coax Flex Type: Flexible

Features

- PTFE Jacket

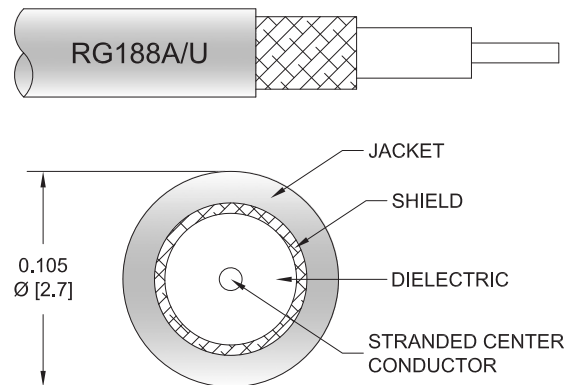

Applications

- General Purpose
- Laboratory Use

Description

The SMA male to SMA female bulkhead cable using RG188 coax, part number FMCA9995, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to female gender configuration with 50 ohm flexible RG-188 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Operating Voltage (AC)			335	Vrms

Mechanical Specifications

Cable Assembly

Weight 0.031 lbs [14.06 g]

Cable

Cable Type RG-188
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1

SMA Male to SMA Female Bulkhead Cable RG-188 Coax



FMCA9995

Shield Layer 1	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.11 in [2.79 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Female Bulkhead
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 µin minimum	MIL-G-45204
Dielectric Type	PTFE	
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification	3 µin minimum	
Coupling Nut Material and Plating	Brass, Gold	
Coupling Nut Plating Specification	3 µin minimum	
Hex Size	5/16 inch	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Male to SMA Female Bulkhead Cable RG-188 Coax



FMCA9995

Typical Performance Data

How to Order

Part Number Configuration:

FMCA9995

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: FMCA9995-12 = 12 inches long cable
FMCA9995-100cm = 100 cm long cable

SMA Male to SMA Female Bulkhead Cable RG-188 Coax from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA Male to SMA Female Bulkhead Cable RG-188 Coax FMCA9995](#)

URL: <https://www.fairviewmicrowave.com/sma-male-to-sma-female-bulkhead-cable-rg-188-coax-fmca9995-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMCA9995 CAD Drawing

SMA Male to SMA Female Bulkhead Cable RG-188 Coax

