



# 1.0mm Fixed Torque Wrench in Click Type 6mm Bit that is Pre-set to 4 in-lbs

### Configuration

Torque Type Fixed
Design Type Click
Hex Size 6 mm

Torque Setting 4 in-lbs [0.45 Nm]Torque Accuracy  $\pm 0.16 \text{ in-lbs } [\pm 0.02 \text{ Nm}]$ 

Torque Accuracy Percentage ±4 %

Size

Length 5.94 in [150.88 mm] Handle Diameter 0.688 in [17.48 mm]

Weight 0.372 lbs [168.74 g]

Handle Color Red

## **Compliance Certifications** (see product page for current document)

#### **Notes:**

- Do not use on damaged connectors.
- To improve performance of a wrench that hasn't been used recently, actuate the wrench by clicking the wrench head back and forth several times before use. This will spread the lubricant through the internal mechanism.
- Click type tools require smooth consistent application of force. Each torquing action should be completed within 2 seconds. Slower or faster torquing action will detract from accuracy.

1.0mm Fixed Torque Wrench in Click Type 6mm Bit that is Pre-set to 4 in-lbs from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 1.0mm Fixed Torque Wrench in Click Type 6mm Bit that is Pre-set to 4 in-lbs ST-1mm1

URL: https://www.fairviewmicrowave.com/1.0mm-fixed-torque-wrench-click-st-1mm1-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

# THE PROPERTY AND ADDRESS OF THE PARTY NAMED AND ADDRESS OF THE

## **Features:**

- · Designed for continual use
- Torque wrench will "click" once torque value force is achieved
- Designed to prevent over torque

•

# **Applications:**


- Attaching Test Cables in Lab Environments
- Final production attachment of product
- Field install and testing applications
- Anytime accurate torque is needed while preventing over-torque

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com

www.fairviewmicrowave.com sales@fairviewmicrowave.com





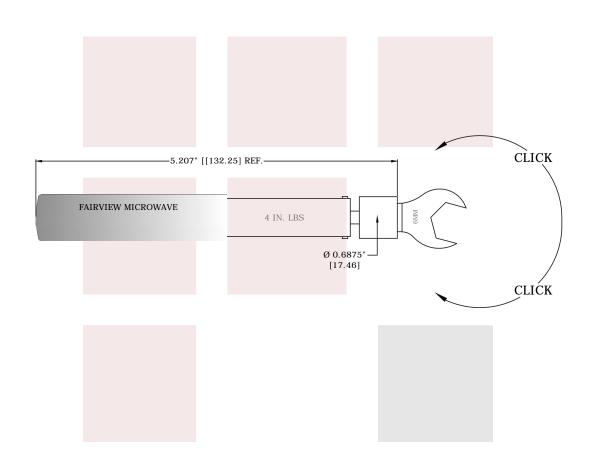

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
1.0mm Fixed Torque Wrench in Click Type 6mm Bit that is Pre-set to 4 in-lbs	DWG NO ST-1mm1			CAGE CODE 3FKR5		
	CAD FILE 051815	SHEET	SCALE	E N/A	SIZE A	5568